


Half Moon Lazy-Susan Rotating Tray

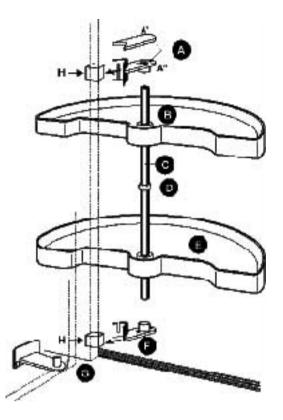

Content list:

- 1 chrome post (C)
- 2 positioning supports: A" (top) and F (bottom)
- 2 half-moon shelves (**B** and **E**)
- 1 rubber ring (D)
- 1 hook (G) attached to the door and the shelf E
- Mounting hardware
- 1 cardboard tube of +/- 5 inches
- Cover cap (A')

Tools required for mounting:

- Screwdriver: Philips or square drive

Mounting Steps - Instructions:

This unit can ben Left door mounted or Right (as shown here). The same instructions apply.

- 1. Install the lower positioning support **F** as described on the drawing.
- 2. Install lower shelf on post; the lower shelf **E** will rest directly on support **F**.
- To determine height of upper shelf B you must slide the rubber ring D provided onto the post X. Use cardboard tube provided to push ring easily into position. NOTE: Tapered side of ring should face top of pole. Remove cardboard tube and slide upper shelf B onto post X. Position securely on top of rubber ring D.
- 4. Place shelf assembly into cabinet by sliding post C into positioning support F.
- 5. Slide support A" onto top of post C and fix securely to cabinet frame H.
- 6. Swing bottom tray E out to 90°-110° position. Hold shelf hook G in position as shown in assembly diagram. Mark location of hook G on door. Screw hook C onto position and carefully slide pin into slot on
- Screw hook G onto position and carefully slide pin into slot on underside of tray E.
- 7. Install cover cap A'.

