1. 1 gal. Dark Cutting Oil

Contains activated sulfur-lard and extreme pressure-antiwear additivesFree of chlorine, other halogens, PCBs and heavy metalsBetter heat dissipationLong lasting formula with less residue backup

Price: 26.82 USD
SKU: 1804
Weight: 7.92 lb(s)
Stock quantity: 17

2. 1 gal. VI-CRYL CP-11 Weather Barrier Coating

In the wet state, VI-CRYL CP-10/11 weather barrier coatings is non-flammableIt contains no solvents that will attack insulations or facingsThe cured film is tough, flexible and resists most common chemicals and many solventsIt is fire-resistive: Its flame spread index being within the range of acceptance of government and industrial agencies

Price: 37.16 USD
SKU: 3647
Weight: 4.00 lb(s)
Stock quantity: 1

3. 1 HP Duplex Grinder System (Pro680 - Series, Model P682XPRG101)

Robust system features a compact heavy-duty polyethylene basin and cover Solids-handling and ProVore grinder models available 46 Gallon capacity System can be installed above or below floor level Two pumps provide secure uninterrupted service Easy access cover with QuickTree® technology – allows for quick float removal and servicing Heavy-duty integrated rubber gaskets on covers Secure 16 bolt cover standard on all models. Passes 10' stack test

Price: 2794.00 USD

SKU: 8450

Weight: 151.00 lb(s)

Stock quantity: 1

4. 1 HP Grinder Automatic Pump (PRG - Series, Model PRG101A)

Heavy cast iron constructionPatented V-Slice® cutter technology Shreds difficult solids such as feminine products, rags, towels and wipes that can jam a solids-handling style pump Hardened stainless steel cutter and plate Oil-filled, thermally protected motorMax Liquid Temp. 140° F

Price: 990.60 USD

SKU: 8449

Weight: 58.00 lb(s)

Stock quantity: 1

5. 1 HP Simplex Grinder System (ProVore 380 - Series, Model P382XPRG101)

Robust system features a compact heavy-duty polyethylene basin and cover System can be installed above or below floor level 41 gallon capacity Patented V-Slice® cutter technology shreds difficult solids such as feminine products, rags, towels and wipes that can jam solids-handling pumps Easy access cover with QuickTree® technology – allows for quick float removal and servicing Heavy-duty integrated rubber gaskets on covers Secure 16 bolt cover standard on all models. Passes 10' stack test

Price: 1137.74 USD
SKU: 8451
Weight: 87.00 lb(s)
Stock quantity: 0

6. 1 HP Submersible Sewage Pump (LE100 Series, Model LE102A3)

Rugged 2 vane, semi-open cast iron impellers Cast iron housings and volute with all stainless and brass fasteners 17-4 PH stainless shaft Oil-filled, hermetically sealed motors Built-in thermal protection on single phase models 2" or 3" flanged discharge Permanently lubricated upper and lower ball bearings Unitized shaft seals Single float mechanical level control with seriesplug for manual bypass operation– standard on single-phase automatic models Adjustable pumping range Quick-disconnect 10' standard power cord allows replacement of cord in seconds without breaking seals to motor (25' and 35' length optional)

Price: 652.80 USD

SKU: 3780

Weight: 64.00 lb(s)

Stock quantity: 0

7. 1" Copper x 1-1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 10.25 USD
SKU: 4277
Weight: 0.44 lb(s)
Stock quantity: 0

8. 1" Angle Thermostatic Radiator Valve

Price: 52.80 USD
SKU: 4371
Weight: 1.39 lb(s)
Stock quantity: 0

9. 1" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 7.29 USD
SKU: 3114
Weight: 0.20 lb(s)
Stock quantity: 1

10. 1" Black 45° Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.31 USD
SKU: 50
Weight: 0.56 lb(s)
Stock quantity: 49

11. 1" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.42 USD
SKU: 7
Weight: 0.60 lb(s)
Stock quantity: 66

12. 1" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.64 USD
SKU: 24
Weight: 0.56 lb(s)
Stock quantity: 55

13. 1" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 1.96 USD
SKU: 412
Weight: 0.33 lb(s)
Stock quantity: 71

14. 1" Black Cast Iron Steam 45° Elbow (Imported)

Price: 5.02 USD
SKU: 940
Weight: 0.92 lb(s)
Stock quantity: 56

15. 1" Black Cast Iron Steam 90° Elbow (Domestic)

Price: 3.05 USD
SKU: 6412
Weight: 0.92 lb(s)
Stock quantity: 1559

16. 1" Black Cast Iron Steam 90° Elbow (Imported)

Price: 2.92 USD
SKU: 924
Weight: 0.92 lb(s)
Stock quantity: 0

17. 1" Black Cast Iron Steam Tee

Price: 5.20 USD
SKU: 883
Weight: 1.00 lb(s)
Stock quantity: 43

18. 1" Black Cast Iron Steam Tee (Domestic)

Price: 3.99 USD
SKU: 6422
Weight: 1.00 lb(s)
Stock quantity: 144

19. 1" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 2.55 USD
SKU: 132
Weight: 0.46 lb(s)
Stock quantity: 123

20. 1" Black Cross Tee

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 5.65 USD
SKU: 4399
Weight: 1.01 lb(s)
Stock quantity: 0

21. 1" Black Extension

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 7.52 USD
SKU: 2639
Weight: 0.35 lb(s)
Stock quantity: 9

22. 1" Black Floor Flange

Floor flange is used to secure pipe to wall or floor mounts for DIY (do-it-yourself) applicationsMeets in ASTM and ANSI standards

Price: 5.50 USD
SKU: 4783
Weight: 0.70 lb(s)
Stock quantity: 19

23. 1" Black Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 1.28 USD
SKU: 3996
Weight: 0.20 lb(s)
Stock quantity: 265

24. 1" Black Street 45 Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.75 USD
SKU: 299
Weight: 0.48 lb(s)
Stock quantity: 11

25. 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 2.99 USD
SKU: 192
Weight: 0.85 lb(s)
Stock quantity: 106

26. 1" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 7.24 USD
SKU: 252
Weight: 0.81 lb(s)
Stock quantity: 44

27. 1" Brass 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 8.93 USD
SKU: 1167
Weight: 0.70 lb(s)
Stock quantity: 30

28. 1" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 8.76 USD
SKU: 1152
Weight: 0.70 lb(s)

29. 1" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 5.64 USD
SKU: 1114
Weight: 0.43 lb(s)
Stock quantity: 19

30. 1" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.82 USD
SKU: 1128
Weight: 0.58 lb(s)
Stock quantity: 22

31. 1" Brass Flange w/Sweat Isolating Valve and Drain

Price: 35.04 USD
SKU: 5420
Weight: 2.50 lb(s)
Stock quantity: 17

32. 1" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.01 USD
SKU: 1412
Weight: 0.30 lb(s)
Stock quantity: 28

33. 1" Brass Street 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 11.29 USD
SKU: 1427
Weight: 0.66 lb(s)
Stock quantity: 15

34. 1" Brass Street 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 11.24 USD
SKU: 1440
Weight: 0.60 lb(s)
Stock quantity: 12

35. 1" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 8.40 USD
SKU: 1464
Weight: 0.98 lb(s)
Stock quantity: 18

36. 1" Brass Union

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 18.20 USD
SKU: 1478
Weight: 0.91 lb(s)
Stock quantity: 19

37. 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.72 USD
SKU: 2031
Weight: 0.30 lb(s)
Stock quantity: 83

38. 1" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 12.38 USD
SKU: 2895
Weight: 0.54 lb(s)

39. 1" Copper 45° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.85 USD
SKU: 1989
Weight: 0.15 lb(s)
Stock quantity: 126

40. 1" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.05 USD
SKU: 2006
Weight: 0.17 lb(s)

41. 1" Copper Caps

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.16 USD
SKU: 1868
Weight: 0.08 lb(s)

42. 1" Copper Coupling (Socket) w/Tube Stop

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.12 USD
SKU: 1913
Weight: 0.06 lb(s)
Stock quantity: 173

43. 1" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 0.99 USD
SKU: 1636
Weight: 0.13 lb(s)
Stock quantity: 142

44. 1" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69

Price: 2.71 USD
SKU: 1630
Weight: 0.64 lb(s)
Stock quantity: 99

45. 1" Copper Epoxy Coated Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 0.97 USD
SKU: 1629
Weight: 0.11 lb(s)
Stock quantity: 43

46. 1" Copper Epoxy Coated Strut Clamp

Price: 1.14 USD
SKU: 1535
Weight: 0.14 lb(s)
Stock quantity: 133

47. 1" Copper Slip Coupling (Socket)

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.59 USD
SKU: 1953
Weight: 0.11 lb(s)
Stock quantity: 241

48. 1" Copper Two Hole Strap

Price: 0.25 USD
SKU: 1435
Weight: 0.06 lb(s)
Stock quantity: 164

49. 1" Copper x 1" Cast Copper Union

Price: 11.91 USD
SKU: 1828
Weight: 0.52 lb(s)
Stock quantity: 39

50. 1" Copper x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 5.90 USD
SKU: 3333
Weight: 0.50 lb(s)
Stock quantity: -550

51. 1" Copper x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 4.59 USD
SKU: 2526
Weight: 0.50 lb(s)
Stock quantity: 36

52. 1" Copper x 2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 16.04 USD
SKU: 2574
Weight: 0.50 lb(s)
Stock quantity: 0

53. 1" Copper x 3/8" Wall Thickness 6 ft. Length Thermacell Insulation

Price: 3.68 USD
SKU: 3892
Weight: 0.07 lb(s)
Stock quantity: 15

54. 1" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.86 USD
SKU: 2136
Weight: 0.25 lb(s)

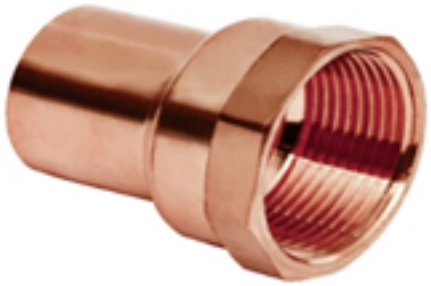

55. 1" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.35 USD
SKU: 2160
Weight: 0.23 lb(s)

56. 1" Double Check Valve

Maximum working water pressure 175 PSI Maximum working water temperature 180°FMain valve body is cast bronze IAPMO and CSA Listed ASSE 1015 and NSF Listed

Price: 110.16 USD
SKU: 1542
Weight: 12.00 lb(s)

57. 1" Double Check Valve (U007M1-QT)

Top entryReplaceable seats and seat discsBronze body for durabilityMaximum working pressure 175 psiTemperature range 33°F to 180°FMeets in ASSE Std. 1015, AWWA Std. C510 IAPMO PS31, CSA B64.5 StandardsInquire with governing authorities for local installation requirements

Price: 166.05 USD

SKU: 4770

Weight: 12.00 lb(s)

58. 1" Double Check Valve ASSEMBLIES (LF007M1-QT)

Lead FreeMaximum working pressure 175 psiTemperature range 33°F to 180°FTop entry Replaceable seats and seat discs Low pressure drop
No special tools required for servicingMeets the requirements of ASSE Std. 1015 and AWWA Std. C510. Inquire with governing authorities for local installation requirements

Price: 0.00 USD
SKU: 8426
Weight: 12.00 lb(s)
Stock quantity: 0

59. 1" Fitting Brush w/ Wire Handle

Price: 2.10 USD
SKU: 1451
Weight: 0.33 lb(s)
Stock quantity: 26

60. 1" Float and Thermostatic Steam Trap

Price: 138.55 USD
SKU: 3461
Weight: 12.20 lb(s)
Stock quantity: 0

61. 1" Flow Check Control Valve

Open automatically when the circulator starts running. Maximum operating pressure 125 PSIMaximum operating temperature 277° F

Price: 54.61 USD
SKU: 3182
Weight: 1.80 lb(s)

62. 1" FTG x Copper 45° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.85 USD
SKU: 1998
Weight: 0.14 lb(s)

63. 1" FTG x Copper 90° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.06 USD
SKU: 2022
Weight: 0.18 lb(s)

64. 1" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.53 USD
SKU: 2867
Weight: 0.56 lb(s)
Stock quantity: 0

65. 1" Galvanized 45° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.79 USD
SKU: 2904
Weight: 0.48 lb(s)
Stock quantity: 4

66. 1" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.34 USD
SKU: 2837
Weight: 0.61 lb(s)
Stock quantity: 16

67. 1" Galvanized Cap

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 0.99 USD
SKU: 2876
Weight: 0.33 lb(s)
Stock quantity: 0

68. 1" Galvanized Clevis Hanger

Pipe Size: 1"Max. Rec. Load: 730 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 1.04 USD
SKU: 3753
Weight: 0.28 lb(s)
Stock quantity: 73

69. 1" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.98 USD
SKU: 3012
Weight: 0.46 lb(s)
Stock quantity: 0

70. 1" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 2.57 USD

SKU: 8514

Weight: 1.05 lb(s)

Stock quantity: 118

71. 1" Galvanized Rod Coupling

Material: Carbon steelFinish: Electro-Galvanized Max. Rec. Load: 5900 lbs.

Price: 5.25 USD
SKU: 854
Weight: 0.72 lb(s)
Stock quantity: 0

72. 1" Galvanized Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 1.10 USD
SKU: 1120
Weight: 0.18 lb(s)
Stock quantity: 153

73. 1" Galvanized Strut Clamp

Price: 0.76 USD
SKU: 1402
Weight: 0.17 lb(s)
Stock quantity: 170

74. 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.96 USD
SKU: 2928
Weight: 0.83 lb(s)
Stock quantity: 9

75. 1" Galvanized Two Hole Strap

Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.May be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4” X 1” tek type screwsApprovals: Underwriters Laboratories listed for US and Canada.

Price: 0.26 USD
SKU: 1675
Weight: 0.06 lb(s)
Stock quantity: 36

76. 1" Galvanized Union

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.95 USD
SKU: 295
Weight: 0.81 lb(s)
Stock quantity: 4

77. 1" Heavy-Duty, Professional Brush

Price: 4.95 USD
SKU: 8845
Weight: 0.30 lb(s)
Stock quantity: 0

78. 1" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 10.87 USD
SKU: 2417
Weight: 0.93 lb(s)
Stock quantity: 39

79. 1" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 9.01 USD
SKU: 7667
Weight: 0.93 lb(s)
Stock quantity: 21

80. 1" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 20.25 USD
SKU: 2448
Weight: 0.93 lb(s)
Stock quantity: 45

81. 1" IPS Ball Valve w/ T-Handle

Price: 18.74 USD
SKU: 8601
Weight: 0.90 lb(s)
Stock quantity: 0

82. 1" IPS Brass Flange with Isolating Ball Valve

Price: 19.90 USD
SKU: 4182
Weight: 1.88 lb(s)
Stock quantity: 18

83. 1" IPS Chrome Plated Shallow Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.53 USD
SKU: 4968
Weight: 0.03 lb(s)
Stock quantity: 32

84. 1" IPS Chrome Plated Split Escutcheon

Chrome Plated FinishMade of Steel

Price: 1.25 USD
SKU: 4995
Weight: 0.03 lb(s)
Stock quantity: 26

85. 1" IPS Gate Valve

Pressure rating 200 psi wogTemperaure rating is 180°FCast brass constructionConforms to NSF / ANSI 372, AB 1953

Price: 19.31 USD
SKU: 2485
Weight: 1.30 lb(s)
Stock quantity: 5

86. 1" IPS Plastic Escutcheon

Chrome Plated FinishMade of Plastic

Price: 1.32 USD
SKU: 5205
Weight: 0.03 lb(s)
Stock quantity: 32

87. 1" IPS Spirovent w/Removable Vent Head

150 IPS

Price: 95.00 USD
SKU: 3971
Weight: 2.50 lb(s)
Stock quantity: 5

88. 1" IPS Spring Loaded Check Valve

Lead FreeMaximum working pressure 200 psiCast Brass spring check valve

Price: 18.40 USD
SKU: 4735
Weight: 0.60 lb(s)

89. 1" IPS Swing Check Valve

Lead FreeCast Brass swing check valve125 WSP, 200 WOGApproved By UPC, NSF

Price: 8.19 USD
SKU: 2280
Weight: 0.76 lb(s)

90. 1" IPS Tankless Water Heater Valve Set

Lead FreeH-44444PR3 Model500 WOG30 PSI/510,000 BTU/HRCertified to NSF/ANSI 61 & 372

Price: 146.71 USD
SKU: 5440
Weight: 3.20 lb(s)
Stock quantity: 3

91. 1" PEX 90° Elbow

Price: 3.33 USD
SKU: 6640
Weight: 0.08 lb(s)
Stock quantity: 0

92. 1" PEX Clamp (Box of 50)

Stainless Steel

Price: 0.61 USD
SKU: 3987
Weight: 0.08 lb(s)
Stock quantity: 0

93. 1" PEX Coupling

Price: 1.31 USD
SKU: 4441
Weight: 0.08 lb(s)
Stock quantity: 0

94. 1" PEX x 1" Male IPS Adapter

Price: 4.17 USD
SKU: 4241
Weight: 0.08 lb(s)
Stock quantity: 1

95. 1" PEX x 3/4" Male IPS Elbow

Price: 3.94 USD
SKU: 6099
Weight: 0.08 lb(s)
Stock quantity: 0

96. 1" Plastic Two Hole Strap

Price: 0.71 USD
SKU: 3631
Weight: 0.02 lb(s)
Stock quantity: 699

97. 1" Power Deuce Copper Fitting Brush Tool

Cat #628401” I.D. (1-1/8” O.D.)

Price: 8.14 USD
SKU: 8840
Weight: 0.30 lb(s)
Stock quantity: 0

98. 1" PVC Check Valve (Solvent)

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 11.00 USD
SKU: 6050
Weight: 0.38 lb(s)

99. 1" PVC Check Valve (Threaded)

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 11.00 USD
SKU: 50004
Weight: 0.38 lb(s)

100. 1" PVC DWV 90° Street Elbow (HUB x SPIGOT)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 2.54 USD
SKU: 3825
Weight: 0.14 lb(s)
Stock quantity: 9

101. 1" PVC Pressure Cap

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.70 USD
SKU: 1030
Weight: 0.06 lb(s)
Stock quantity: 29

102. 1" PVC Pressure Coupling

Maximum service temperature 140°FSLIP x SLIP connectionsASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.68 USD
SKU: 3094
Weight: 0.07 lb(s)
Stock quantity: 19

103. 1" PVC Pressure Female Adapter (SLIP x FIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.79 USD
SKU: 812
Weight: 0.08 lb(s)
Stock quantity: 10

104. 1" PVC Pressure Male Adapter (SLIP x MIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedSize range 1¼" to 4"

Price: 0.79 USD
SKU: 3087
Weight: 0.07 lb(s)
Stock quantity: 16

105. 1" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.13 USD
SKU: 2700
Weight: 0.16 lb(s)
Stock quantity: 19

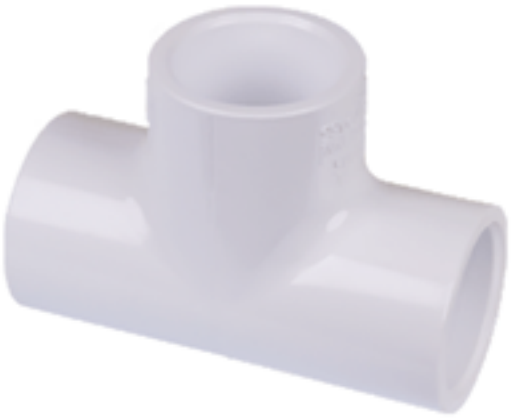

106. 1" SCH 40 PVC Ball Valve

Pressure rating is 150 psi at 73°F Connection Type: SolventProvides great strength and resistance to corrosion and chemicalsCompact and lightweight design

Price: 4.90 USD
SKU: 3630
Weight: 0.60 lb(s)
Stock quantity: 0

107. 1" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 300 lbs.Pipe Size: 1"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69

Price: 0.50 USD

SKU: 1499

Weight: 0.10 lb(s)

Stock quantity: 655

108. 1" Standard Length Spade Bit

Blue-Groove point and cutting edge for faster chip removal - 4x faster than standard spade bitsDouble cutting spurs scribe the outside of the hole reducing breakout10% larger shank for added durabilityGrooved hex shank prevents slipping in drill chuck or bit extensionFits all standard quick change chucks

Price: 6.26 USD
SKU: 1763
Weight: 0.40 lb(s)
Stock quantity: 5

109. 1" Steam Angle Radiator Valve

Price: 17.93 USD
SKU: 3219
Weight: 1.52 lb(s)
Stock quantity: 17

110. 1" Steam Convector Valve

Price: 17.42 USD
SKU: 2891
Weight: 1.10 lb(s)
Stock quantity: 10

111. 1" Steam Straight Radiator Valve

Price: 18.17 USD
SKU: 3242
Stock quantity: 8

112. 1" Straight Thermostatic Radiator Valve

Price: 51.25 USD
SKU: 4473
Weight: 1.56 lb(s)
Stock quantity: 0

113. 1" Suspension Clamp

Price: 0.74 USD
SKU: 3129
Weight: 0.02 lb(s)
Stock quantity: 310

114. 1" Sweat Solder Kit Long

Polished chrome finish

Price: 6.57 USD
SKU: 2695
Weight: 0.40 lb(s)
Stock quantity: 9

115. 1" Sweat Ball Valve

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 11.12 USD
SKU: 2358
Weight: 1.03 lb(s)
Stock quantity: 0

116. 1" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 11.20 USD
SKU: 7661
Weight: 1.03 lb(s)
Stock quantity: -1

117. 1" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 20.25 USD
SKU: 4705
Weight: 1.03 lb(s)
Stock quantity: 27

118. 1" Sweat Brass Flange with Isolating Ball Valve

Price: 28.01 USD
SKU: 3374
Weight: 1.80 lb(s)
Stock quantity: 11

119. 1" Sweat Check Valve

For installing on copper pipe using standard copper soldering methodArrow on the valve body shows direction of the flowSuitable for upright horizontal and vertical (arrow pointing upward) installations in plumbing and heating systems Pressure Ratings: 200 psi Non-Shock WOGConstruction: Lead-Free Brass Body

Price: 10.48 USD
SKU: 2704
Weight: 0.80 lb(s)

120. 1" Sweat Gate Valve

Price: 19.30 USD
SKU: 2990
Weight: 1.30 lb(s)
Stock quantity: 16

121. 1" Sweat Solder Kit Short

Polished chrome finish

Price: 5.11 USD
SKU: 3097
Weight: 0.40 lb(s)
Stock quantity: 0

122. 1" Sweat Spirovent w/Removable Vent Head

150 PSI

Price: 109.28 USD
SKU: 683
Weight: 2.50 lb(s)
Stock quantity: 6

123. 1" Sweat Thermostatic Mixing Valve

Temperature Range: 95°F - 131°FStandards: ASSE 1070 ASSE 1017 CSA B125.3 NSF/ANSI-61 NSF/ANSI-372

Price: 93.44 USD
SKU: 5011
Weight: 2.50 lb(s)
Stock quantity: 3

124. 1" Test & Drain Valves

Female NPT Inlet and Outlet Rated 300 PSIRough Brass

Price: 118.30 USD
SKU: 4703
Weight: 2.50 lb(s)
Stock quantity: 8

125. 1" Waterflow Alarm Switch with Retard

NEMA 4/IP54 Rated Enclosure suitable for indoor or outdoor use with factory installed gasket and die-cast housing when used with appropriate conduit fittingTemperature Range: 40°F - 120°FNon-corrosive sleeve factory installed in saddle

Price: 147.15 USD
SKU: 4684
Weight: 1.50 lb(s)
Stock quantity: 2

126. 1" x 3/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 2.64 USD
SKU: 133
Weight: 0.41 lb(s)
Stock quantity: 33

127. 1" x 1" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.70 USD
SKU: 2048
Weight: 0.21 lb(s)

128. 1" x 1" x 1/2" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.98 USD
SKU: 1860
Weight: 0.35 lb(s)

129. 1" x 1" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 10.32 USD
SKU: 2046
Weight: 0.64 lb(s)

130. 1" x 1" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.70 USD
SKU: 2047
Weight: 0.26 lb(s)

131. 1" x 1" x 3/4" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.90 USD
SKU: 3904
Weight: 0.42 lb(s)

132. 1" x 1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.31 USD
SKU: 11
Weight: 0.43 lb(s)
Stock quantity: 9

133. 1" x 1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.87 USD
SKU: 384
Weight: 0.23 lb(s)
Stock quantity: 195

134. 1" x 1/2" Black Cast Iron Steam 90° Elbow (Domestic)

Price: 4.18 USD
SKU: 6419
Weight: 0.92 lb(s)
Stock quantity: 425

135. 1" x 1/2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 3.22 USD
SKU: 931
Weight: 0.92 lb(s)
Stock quantity: 396

136. 1" x 1/2" Black Cast Iron Steam Coupling (Imported)

Price: 2.53 USD
SKU: 1357
Weight: 0.60 lb(s)
Stock quantity: 263

137. 1" x 1/2" Black Cast Iron Steam Tee

Price: 4.12 USD
SKU: 918
Weight: 1.00 lb(s)
Stock quantity: 40

138. 1" x 1/2" Black Cast Iron Steam Tee (Domestic)

Price: 4.87 USD
SKU: 8180
Weight: 1.00 lb(s)
Stock quantity: 104

139. 1" x 1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 2.16 USD
SKU: 335
Weight: 0.37 lb(s)
Stock quantity: -86

140. 1" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 3.21 USD
SKU: 188
Weight: 0.68 lb(s)
Stock quantity: 22

141. 1" x 1/2" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 7.44 USD
SKU: 1356
Weight: 0.53 lb(s)
Stock quantity: 0

142. 1" x 1/2" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 9.32 USD
SKU: 1253
Weight: 0.49 lb(s)
Stock quantity: 7

143. 1" x 1/2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 14.22 USD
SKU: 1266
Weight: 0.80 lb(s)
Stock quantity: 2

144. 1" x 1/2" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.39 USD
SKU: 2017
Weight: 0.25 lb(s)

145. 1" x 1/2" Copper Reducer Coupling

Price: 2.19 USD
SKU: 1930
Weight: 0.11 lb(s)
Stock quantity: 23

146. 1" x 1/2" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 7.01 USD
SKU: 2146
Weight: 0.29 lb(s)

147. 1" x 1/2" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 6.19 USD
SKU: 2173
Weight: 0.17 lb(s)

148. 1" x 1/2" FTG x C Copper Reducer Fitting Adapter

Price: 2.01 USD
SKU: 1962
Weight: 0.22 lb(s)
Stock quantity: 46

149. 1" x 1/2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.25 USD
SKU: 2839
Weight: 0.44 lb(s)
Stock quantity: 2

150. 1" x 1/2" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.66 USD
SKU: 2794
Weight: 0.23 lb(s)
Stock quantity: 0

151. 1" x 1/2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.86 USD
SKU: 3016
Weight: 0.37 lb(s)
Stock quantity: 5

152. 1" x 1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.74 USD
SKU: 2938
Weight: 0.68 lb(s)
Stock quantity: 4

153. 1" x 1/2" PVC DWV Reducer Coupling (HUB x HUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness. Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 1.85 USD
SKU: 6019
Weight: 0.16 lb(s)
Stock quantity: 0

154. 1" x 1/2" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.25 USD
SKU: 8517
Weight: 0.14 lb(s)
Stock quantity: 5

155. 1" x 1/2" Steam Coupling (Domestic)

Price: 3.53 USD
SKU: 6415
Weight: 1.00 lb(s)
Stock quantity: 247

156. 1" x 1/2" x 1" Black Cast Iron Steam Tee

Price: 4.42 USD
SKU: 1063
Weight: 1.00 lb(s)
Stock quantity: 3

157. 1" x 1/2" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 2.86 USD
SKU: 3025
Weight: 0.73 lb(s)
Stock quantity: 9

158. 1" x 1/2" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.61 USD
SKU: 2052
Weight: 0.29 lb(s)

159. 1" x 1/2" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.29 USD
SKU: 2932
Weight: 0.62 lb(s)
Stock quantity: 2

160. 1" x 1/2" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 3.56 USD
SKU: 202
Weight: 0.53 lb(s)
Stock quantity: 20

161. 1" x 1/2" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.61 USD
SKU: 2054
Weight: 0.23 lb(s)

162. 1" x 1/2" x 1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.29 USD
SKU: 2930
Weight: 0.53 lb(s)
Stock quantity: 2

163. 1" x 1/2" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 3.52 USD
SKU: 206
Weight: 0.62 lb(s)
Stock quantity: 20

164. 1" x 1/2" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.89 USD
SKU: 2053
Weight: 0.28 lb(s)

165. 1" x 1/2" x 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.35 USD
SKU: 2931
Weight: 0.62 lb(s)
Stock quantity: 2

166. 1" x 1/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.61 USD
SKU: 409
Weight: 0.22 lb(s)
Stock quantity: 40

167. 1" x 1/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 2.53 USD
SKU: 1141
Weight: 0.30 lb(s)
Stock quantity: 8

168. 1" x 1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 2.90 USD
SKU: 3811
Weight: 0.58 lb(s)
Stock quantity: 19

169. 1" x 1/4" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 5.83 USD
SKU: 1192
Weight: 0.32 lb(s)
Stock quantity: 10

170. 1" x 1/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.80 USD
SKU: 2792
Weight: 0.22 lb(s)
Stock quantity: 0

171. 1" x 1/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.96 USD
SKU: 429
Weight: 0.22 lb(s)
Stock quantity: 54

172. 1" x 1/8" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 4.03 USD
SKU: 4460
Weight: 0.23 lb(s)
Stock quantity: 0

173. 1" x 1/8" x 1" C x F x C Tee

C x F x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 7.18 USD
SKU: 3794
Weight: 0.42 lb(s)
Stock quantity: 3

174. 1" x 10' Copper L Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.45"

Price: 29.03 USD
SKU: 2190
Weight: 6.55 lb(s)
Stock quantity: 77

175. 1" x 10' SCH 40 Black Pipe

Price: 17.31 USD
SKU: 1085
Stock quantity: 700

176. 1" x 10' SCH 40 Galvanized Pipe

Price: 41.98 USD
SKU: 4079
Stock quantity: 12

177. 1" x 10' SCH40 PVC DWV Pipe

Price: 7.00 USD
SKU: 4149
Stock quantity: -1

178. 1" x 10" Copper M Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.035"

Price: 24.28 USD
SKU: 2194
Weight: 46.50 lb(s)
Stock quantity: 26

179. 1" x 1-1/2" Black Cast Iron Steam Tee

Price: 5.50 USD
SKU: 2671
Weight: 1.00 lb(s)
Stock quantity: 19

180. 1" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 9.59 USD
SKU: 203
Weight: 1.36 lb(s)
Stock quantity: 2

181. 1" x 1-1/2" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 13.61 USD
SKU: 2171
Weight: 0.57 lb(s)

182. 1" x 1-1/4" Black Cast Iron Steam Tee

Price: 5.63 USD
SKU: 933
Weight: 1.00 lb(s)
Stock quantity: 45

183. 1" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 6.71 USD
SKU: 6088
Weight: 1.12 lb(s)
Stock quantity: 2

184. 1" x 1-1/4" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 10.21 USD
SKU: 2144
Weight: 0.33 lb(s)

185. 1" x 1-1/4" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 7.17 USD
SKU: 2172
Weight: 0.34 lb(s)

186. 1" x 12' Roll Compression Seal Tape

#76085Stops nasty leaks under pressure without turning off the water source.Seal leaks up to 150 PSI (water, air, steam)Self-fusing layers for a waterproof, long-term compression sealEffective to 500°F / 260°CSuitable for burial without jacketingEnvironmentally safe and non-toxicStops and prevents corrosionSafe for drinking waterAll purpose - use on iron, brass, copper, aluminum, stainless steel, galvanized steel, polyethylene, polypropylene, PVC, CPVC, ABS and moreIdeal for irrigation pipe repairEasy to use - no waste

Price: 27.75 USD
SKU: 8832
Weight: 0.30 lb(s)
Stock quantity: 0

187. 1" x 1429" PTFE Thread Seal Tape (Blue)

Cat. #70887Composition: 99.6% PTFE Pigment Color: BlueLength: 1429"Thickness: 0.0035" +/- 10%Density: 0.8g/cm3Elongation: >100%Tensile Strength: 15N / mm2Pressure rating: Thread Sealing Tape has been used to seal fittings carrying water and oil at pressures up to 10,000 PSI or 69,000kPaNote: Pressure ratings are relative to the quality and torque of the fittings and the amount of tape used.Temperature Range: -450°F to +500°F (-268°C to +260°C) PTFE is completely stable up to +500o F or +260°C. Decomposition is slow up to 750°F or 400°C. Although decomposition will occur on contact with naked flames.

Price: 3.75 USD

SKU: 8842

Weight: 0.30 lb(s)

Stock quantity: 0

188. 1" x 2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 4.79 USD
SKU: 1640
Weight: 0.23 lb(s)
Stock quantity: 8

189. 1" x 2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable construction Male threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.13 USD
SKU: 3328
Weight: 0.31 lb(s)
Stock quantity: 5

190. 1" x 2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.07 USD
SKU: 530
Weight: 0.31 lb(s)
Stock quantity: 115

191. 1" x 2-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 4.18 USD
SKU: 1641
Weight: 0.30 lb(s)
Stock quantity: 23

192. 1" x 2-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.15 USD
SKU: 2705
Weight: 0.39 lb(s)
Stock quantity: 8

193. 1" x 2-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.07 USD
SKU: 535
Weight: 0.39 lb(s)
Stock quantity: 92

194. 1" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 6.22 USD
SKU: 1642
Weight: 0.38 lb(s)
Stock quantity: 29

195. 1" x 3" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.15 USD
SKU: 2712
Weight: 0.48 lb(s)
Stock quantity: 3

196. 1" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.03 USD
SKU: 536
Weight: 0.48 lb(s)
Stock quantity: 97

197. 1" x 3/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.68 USD
SKU: 9
Weight: 0.51 lb(s)
Stock quantity: 25

198. 1" x 3/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.74 USD
SKU: 6612
Weight: 0.19 lb(s)
Stock quantity: 13

199. 1" x 3/4" Black Cast Iron Steam 90° Elbow (Imported)

Price: 4.58 USD
SKU: 939
Weight: 0.92 lb(s)
Stock quantity: 20

200. 1" x 3/4" Black Cast Iron Steam Coupling (Imported)

Price: 3.42 USD
SKU: 1369
Weight: 0.60 lb(s)
Stock quantity: 28

201. 1" x 3/4" Black Cast Iron Steam Tee

Price: 3.06 USD
SKU: 926
Weight: 1.00 lb(s)
Stock quantity: 47

202. 1" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 3.94 USD
SKU: 333
Weight: 0.73 lb(s)
Stock quantity: 22

203. 1" x 3/4" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 7.35 USD
SKU: 1362
Weight: 0.61 lb(s)
Stock quantity: 7

204. 1" x 3/4" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.96 USD
SKU: 1195
Weight: 0.29 lb(s)
Stock quantity: 9

205. 1" x 3/4" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 7.97 USD
SKU: 1254
Weight: 0.53 lb(s)
Stock quantity: 8

206. 1" x 3/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 10.15 USD
SKU: 1133
Weight: 0.90 lb(s)
Stock quantity: -1

207. 1" x 3/4" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.93 USD
SKU: 2016
Weight: 0.21 lb(s)

208. 1" x 3/4" Copper Reducer Coupling

Price: 1.82 USD
SKU: 1929
Weight: 0.14 lb(s)
Stock quantity: 97

209. 1" x 3/4" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.69 USD
SKU: 2145
Weight: 0.22 lb(s)

210. 1" x 3/4" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.97 USD
SKU: 1906
Weight: 0.19 lb(s)

211. 1" x 3/4" FTG x C Copper Reducer Fitting Adapter

Price: 1.55 USD
SKU: 1961
Weight: 0.14 lb(s)
Stock quantity: 31

212. 1" x 3/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.80 USD
SKU: 2840
Weight: 0.51 lb(s)
Stock quantity: 4

213. 1" x 3/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.55 USD
SKU: 2795
Weight: 0.19 lb(s)
Stock quantity: 0

214. 1" x 3/4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.76 USD
SKU: 3017
Weight: 0.41 lb(s)
Stock quantity: 0

215. 1" x 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.74 USD
SKU: 2939
Weight: 0.74 lb(s)
Stock quantity: 4

216. 1" x 3/4" PEX Coupling

Price: 1.93 USD
SKU: 5976
Weight: 0.08 lb(s)
Stock quantity: 0

217. 1" x 3/4" PVC DWV Reducer Coupling (HUB x HUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness.Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 1.52 USD
SKU: 6015
Weight: 0.16 lb(s)
Stock quantity: 9

218. 1" x 3/4" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.17 USD
SKU: 6002
Weight: 0.14 lb(s)
Stock quantity: 10

219. 1" x 3/4" Urinal Spud

Price: 5.64 USD
SKU: 1789
Weight: 0.50 lb(s)
Stock quantity: 2

220. 1" x 3/4" x 1" Black Cast Iron Steam Tee

Price: 3.22 USD
SKU: 910
Weight: 1.00 lb(s)
Stock quantity: 9

221. 1" x 3/4" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 3.08 USD
SKU: 212
Weight: 0.78 lb(s)
Stock quantity: 7

222. 1" x 3/4" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.61 USD
SKU: 2049
Weight: 0.29 lb(s)

223. 1" x 3/4" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.29 USD
SKU: 2935
Weight: 0.78 lb(s)
Stock quantity: 0

224. 1" x 3/4" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.61 USD
SKU: 2051
Weight: 0.20 lb(s)

225. 1" x 3/4" x 1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.33 USD
SKU: 2933
Weight: 0.59 lb(s)
Stock quantity: 2

226. 1" x 3/4" x 3/4" Black Cast Iron Steam Tee

Price: 5.64 USD
SKU: 904
Weight: 1.00 lb(s)
Stock quantity: 0

227. 1" x 3/4" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 3.43 USD
SKU: 213
Weight: 0.66 lb(s)
Stock quantity: -6

228. 1" x 3/4" x 3/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 11.81 USD
SKU: 1489
Weight: 0.80 lb(s)
Stock quantity: 1

229. 1" x 3/4" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.61 USD
SKU: 2050
Weight: 0.27 lb(s)

230. 1" x 3/4" x 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.29 USD
SKU: 2934
Weight: 0.66 lb(s)
Stock quantity: 2

231. 1" x 3/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.11 USD
SKU: 395
Weight: 0.21 lb(s)
Stock quantity: 21

232. 1" x 3/8" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 2.53 USD
SKU: 131
Weight: 0.32 lb(s)
Stock quantity: 5

233. 1" x 3/8" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 3.66 USD
SKU: 4025
Weight: 0.63 lb(s)
Stock quantity: 2

234. 1" x 3/8" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 5.59 USD
SKU: 1417
Weight: 0.31 lb(s)
Stock quantity: 27

235. 1" x 3/8" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.40 USD
SKU: 2793
Weight: 0.21 lb(s)
Stock quantity: 2

236. 1" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 5.36 USD
SKU: 1643
Weight: 0.45 lb(s)
Stock quantity: 23

237. 1" x 3-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.43 USD
SKU: 2720
Weight: 0.58 lb(s)
Stock quantity: 8

238. 1" x 3-1/2" SCH 40 BBlack Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.35 USD
SKU: 525
Weight: 0.58 lb(s)
Stock quantity: 89

239. 1" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 6.08 USD
SKU: 1644
Weight: 0.52 lb(s)
Stock quantity: 15

240. 1" x 4" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.43 USD
SKU: 3074
Weight: 0.67 lb(s)
Stock quantity: 7

241. 1" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.35 USD
SKU: 2394
Weight: 0.67 lb(s)
Stock quantity: 106

242. 1" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 6.80 USD
SKU: 1645
Weight: 0.60 lb(s)
Stock quantity: 22

243. 1" x 4-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.85 USD
SKU: 2727
Weight: 0.76 lb(s)
Stock quantity: 8

244. 1" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.64 USD
SKU: 482
Weight: 0.76 lb(s)
Stock quantity: 71

245. 1" x 5 SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.62 USD
SKU: 483
Weight: 0.86 lb(s)
Stock quantity: 108

246. 1" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 7.52 USD
SKU: 1646
Weight: 0.67 lb(s)
Stock quantity: 5

247. 1" x 5" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.85 USD
SKU: 2734
Weight: 0.86 lb(s)
Stock quantity: 8

248. 1" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 8.45 USD
SKU: 1647
Weight: 0.75 lb(s)
Stock quantity: 20

249. 1" x 5-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.94 USD
SKU: 3301
Weight: 0.96 lb(s)
Stock quantity: 8

250. 1" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.83 USD
SKU: 475
Weight: 0.96 lb(s)
Stock quantity: 69

251. 1" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 8.80 USD
SKU: 1648
Weight: 0.82 lb(s)
Stock quantity: 17

252. 1" x 6" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.94 USD
SKU: 3312
Weight: 1.05 lb(s)
Stock quantity: 6

253. 1" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.87 USD
SKU: 476
Weight: 1.05 lb(s)
Stock quantity: 109

254. 1" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 3.82 USD
SKU: 1639
Weight: 0.15 lb(s)
Stock quantity: 20

255. 1" x Close Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.92 USD
SKU: 3320
Weight: 0.21 lb(s)
Stock quantity: 8

256. 1" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.92 USD
SKU: 543
Weight: 0.21 lb(s)
Stock quantity: 135

257. 1" x1/2" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 4.64 USD
SKU: 1194
Weight: 0.33 lb(s)
Stock quantity: 10

258. 1"x 3/4" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 3.54 USD
SKU: 211
Weight: 0.59 lb(s)
Stock quantity: 23

259. 1.4 kW Electric Mini Tank Water Heater

Point-of-use heating eliminates long hot water pipe runsCompact design - fits virtually anywhereHot or cold water feedAdjustable temperature control 50-140°FT&P valve includedSingle weld glass lined tank for extended lifeFloor mount or wall hung (bracket included)Status indicator light120V cord provided for EMT1, EMT2.5, EMT 4Amperage: 12 A Heating Capacity: 1440 watts Phase: Single Temperature Range: 50°F-140°F Maximum Operating Pressure: 150 PSIEMT6 must be hardwiredETL listed to UL174 and NSF373Model: EMT2.5

Price: 215.90 USD

SKU: 3155

Weight: 20.00 lb(s)

Stock quantity: 6

260. 1.4 kW Electric Mini Tank Water Heater

Point-of-use heating eliminates long hot water pipe runsCompact design - fits virtually anywhereHot or cold water feedAdjustable temperature control 50-140°FT&P valve includedSingle weld glass lined tank for extended lifeFloor mount or wall hung (bracket included)Status indicator light120V cord provided for EMT1, EMT2.5, EMT 4Amperage: 12 AHeating Capacity: 1440 wattsPhase: SingleTemperature Range: 50°F-140°FMaximum Operating Pressure: 150 PSIEMT6 must be hardwiredETL listed to UL174 and NSF373Model: EMT2.5

Price: 229.02 USD

SKU: 3163

Weight: 24.00 lb(s)

Stock quantity: 4

261. 1/2 HP Commercial High Temp Drain Pump (Model 405)

Oil-filled motor with thermal-overload protectionCorrosion-resistant polyolefin basin with integrally molded rubber gasket for a superior gas-tight sealMaintenance-free, permanently lubricated sealed bearings

Price: 399.02 USD
SKU: 8533
Weight: 16.00 lb(s)
Stock quantity: 0

262. 1/2 HP Duplex Sewage System (1100-Series, Model 1102LE51M)

Heavy duty structural foam basin; 30" diameter x 36” high; 110 gallon capacity Completely assembled system with piping included Floats for control unit factory pre-set* 4" inlet hub with rubber pipe seal Heavy, 1/4" enamel coated steel cover with separate pump access covers and a 10" diameter inspection cover (Fiberglass cover assembly available) Pump restraints (torque-stops) hold pumps securely in proper position2" discharge

Price: 1742.62 USD

SKU: 8442

Weight: 217.00 lb(s)

Stock quantity: 0

263. 1/2 HP Pro380 Simplex Sewage Package (Model P382LE51)

QuickTree technology allows easy access and removal of switches without disturbing pump or plumbingIncludes wide angle floatIntegrated rubber seals permanently attached to coverUnique cord seal technology integrated into the inspection coverShallow 24" basin for easier installation in difficult soil/bedrock locationsLarge 41 gallon capacity for longer pump cyclesIntegrally molded torque stops secure the pump in its proper positionIntegrally molded anti-flotation collarDurable polyethylene constructionCompletely assembled

Price: 487.68 USD

SKU: 7202

Weight: 64.00 lb(s)

Stock quantity: 0

264. 1/2 HP Sewage Automatic Pump (SEV412-Series, Model SEV412A)

Cast iron motor housing and volute Impeller Type: Cast iron multi-vane vortex416 stainless steel shaft to handle aggressive sewageUpper and lover ball bearing for guiter run and longer lifePermanent split capasitor (PSC) motor for more efficient operation2" discharge ith hight temperature overload on the motor for singe phase operationQuick connect custom cord molded for sealing amd strain relief Part No. 101293

Price: 279.30 USD

SKU: 3773

Weight: 45.00 lb(s)

Stock quantity: 0

265. 1/2 HP Sewage Pump (LE50-Series, Model LE51A)

Heavy cast iron construction Oil filled, thermally protected motor Permanently lubricated bearings 2-vane, corrosion resistant *HYTREL® impeller All stainless steel fasteners and rotor shaft Quick-disconnect 10' standard power cord allows replacement of cord in seconds without breaking seals to motor. (25' length optional)Maximum fluid temperature 140˚F

Price: 367.81 USD

SKU: 8310

Weight: 42.00 lb(s)

Stock quantity: 1

266. 1/2 HP Simplex Sewage Package (Model SEV412)

Floatree design for easy float maintenance; Flange includes provision for optional alarm floatSplit cover allows simplified basin accessSidewall ribs lock basin in place when concrete floor is pouredInlet hubs easily connect to piping with fl exible rubber connectors (Provided by others)Ribbed floor limits pump rotationLiquid Temperature 104°F (40°C)25" x 24" Polyethylene Basin

Price: 520.00 USD
SKU: 8701
Weight: 80.00 lb(s)
Stock quantity: 1

267. 1/2 HP Sump Pump (SP50VFX-Series)

Cast iron vortex impeller handles of typical sump debrisBall bearing construction for quieter run and longer lifePermanent split capacitor (PSC) motor for more efficient operating range 30' of head shutoff providing broader operating range for most applicationsGFCI Compatible for safety and NEC 210.8 (A) Compliance

Price: 166.04 USD

SKU: 5045

Weight: 34.00 lb(s)

Stock quantity: 0

268. 1/2 HP Sump Pump (SPHP12)

Thermal overload protection Automatic float switchCorrosion resistant treated aluminum motor housingComposite bodyFits narrow 10” pump pitsStrong flow rate: 3300GphInstallation: simple torque wrench tool to adjust the check valve

Price: 84.87 USD
SKU: 8406
Weight: 14.00 lb(s)
Stock quantity: 1

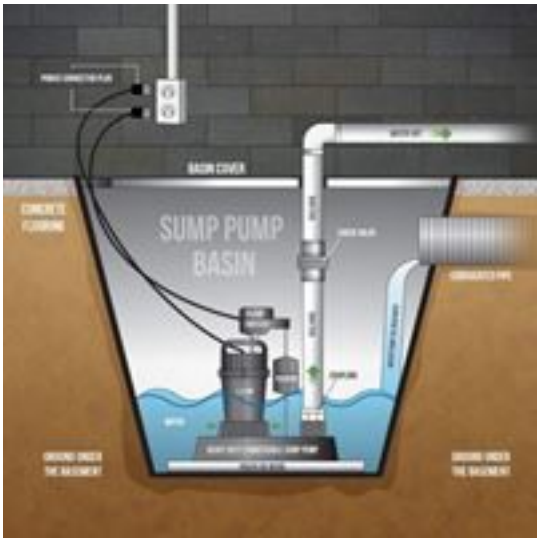

269. 1/2" C x F 90° Drop Ear Elbow

Price: 2.64 USD
SKU: 1847
Weight: 0.30 lb(s)
Stock quantity: 148

270. 1/2" Chrome Plated Escutcheon (White, 2 Pieces)

Made of Steel

Price: 1.63 USD
SKU: 630
Weight: 0.03 lb(s)
Stock quantity: 3

271. 1/2" Angle Steam Trap

Price: 37.12 USD
SKU: 3278
Weight: 1.00 lb(s)
Stock quantity: 12

272. 1/2" Angle Thermostatic Radiator Valve

Price: 32.60 USD
SKU: 4259
Weight: 0.66 lb(s)
Stock quantity: 0

273. 1/2" Black 45° Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.12 USD
SKU: 105
Weight: 0.21 lb(s)
Stock quantity: 84

274. 1/2" Black 45° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.85 USD
SKU: 106
Weight: 0.18 lb(s)
Stock quantity: 26

275. 1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.10 USD
SKU: 89
Weight: 0.20 lb(s)
Stock quantity: 84

276. 1/2" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.63 USD
SKU: 284
Weight: 0.22 lb(s)
Stock quantity: 41

277. 1/2" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 1.03 USD
SKU: 440
Weight: 0.12 lb(s)
Stock quantity: 163

278. 1/2" Black Cast Iron Steam 45° Elbow (Imported)

Price: 1.94 USD
SKU: 925
Weight: 0.52 lb(s)
Stock quantity: 29

279. 1/2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 2.86 USD
SKU: 896
Weight: 0.52 lb(s)
Stock quantity: 65

280. 1/2" Black Cast Iron Steam Tee

Price: 4.19 USD
SKU: 1306
Weight: 0.52 lb(s)
Stock quantity: 77

281. 1/2" Black C-Clamp

Material: Carbon steel with hardened steel cup point set screw (Type 304 or 316 Stainless Steel upon request)Finish: Plain or electro-galvanizedApprovals: Underwriters' Laboratories Listed in the U.S. (UL) for 3/8" and 1/2" sizes only. Complies with Federal Specifications A-A-1192A (Type 23)

Price: 1.07 USD
SKU: 1380
Weight: 0.36 lb(s)
Stock quantity: 0

282. 1/2" Black C-Clamp w/Lock Nut

Material: Carbon steel with hardened steel cup point set screw (Type 304 or 316 Stainless Steel upon request)Finish: Plain or electro-galvanizedApprovals: Underwriters' Laboratories Listed in the U.S. (UL) for 3/8" and 1/2" sizes only. Complies with Federal Specifications A-A-1192A (Type 23) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 23) which supersedes ANSI/MSS SP-69. (Approvals are only for Fig. 250 with locknut)

Price: 0.99 USD

SKU: 1397

Weight: 0.38 lb(s)

Stock quantity: 0

283. 1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.28 USD
SKU: 130
Weight: 0.18 lb(s)
Stock quantity: 155

284. 1/2" Black Cross Tee

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 3.83 USD
SKU: 208
Weight: 0.40 lb(s)
Stock quantity: 6

285. 1/2" Black Extension

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 4.18 USD
SKU: 2516
Weight: 0.15 lb(s)
Stock quantity: 77

286. 1/2" Black Floor Flange

Floor flange is used to secure pipe to wall or floor mounts for DIY (do-it-yourself) applicationsMeets in ASTM and ANSI standards

Price: 4.29 USD
SKU: 2929
Weight: 0.39 lb(s)
Stock quantity: 0

287. 1/2" Black Junior Beam Clamp

Max. Pipe Size: 8"Max. Rec. Load: 500 lbs.Approvals: Complies with Federal Specifications A-A1192A (Type 19) and Manufacturers' Standardization Society ANSI/ MSS SPSP-58 (Type 19) which supersedes ANSI/MSS SP-69, Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Factory Mutual Approved.

Price: 1.45 USD
SKU: 8670
Weight: 0.34 lb(s)
Stock quantity: 100

288. 1/2" Black Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 1.10 USD
SKU: 386
Weight: 0.08 lb(s)
Stock quantity: 501

289. 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 0.99 USD
SKU: 214
Weight: 0.33 lb(s)
Stock quantity: 60

290. 1/2" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 3.94 USD
SKU: 250
Weight: 0.40 lb(s)
Stock quantity: 39

291. 1/2" Black Wide Mouth Beam Clamp

Malleable iron with hardened steel cup point set screw and locknutMax. Pipe Size: 8"Max. Rec. Load: 500 lbs.Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), and Factory Mutual Approved. Complies with Federal Specifications A-A-1192A (Type 19) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 19) which supersedes ANSI/MSS SP-69.

Price: 1.45 USD

SKU: 1742

Weight: 0.35 lb(s)

Stock quantity: 200

292. 1/2" Boiler Drain Cock

Price: 5.61 USD
SKU: 2412
Weight: 0.30 lb(s)
Stock quantity: 69

293. 1/2" Brass 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.73 USD
SKU: 1165
Weight: 0.31 lb(s)
Stock quantity: 38

294. 1/2" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ANSI/ASME BI6.14,BI5.15,BI6.18 MSS-SP-I06, A-A-59617, ANSI/ASME B 1.20.1 Standards

Price: 4.07 USD
SKU: 1150
Weight: 0.30 lb(s)
Stock quantity: 31

295. 1/2" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.36 USD
SKU: 1112
Weight: 0.23 lb(s)
Stock quantity: 20

296. 1/2" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.66 USD
SKU: 6593
Weight: 0.30 lb(s)
Stock quantity: 37

297. 1/2" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.80 USD
SKU: 1410
Weight: 0.18 lb(s)
Stock quantity: 99

298. 1/2" Brass Short Extension

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 5.64 USD
SKU: 2566
Weight: 0.60 lb(s)
Stock quantity: 57

299. 1/2" Brass Street 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 4.29 USD
SKU: 1425
Weight: 0.32 lb(s)
Stock quantity: 9

300. 1/2" Brass Street 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 4.29 USD
SKU: 1438
Weight: 0.30 lb(s)
Stock quantity: 10

301. 1/2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 4.71 USD
SKU: 6737
Weight: 0.46 lb(s)
Stock quantity: 11

302. 1/2" Brass Union

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 9.80 USD
SKU: 1476
Weight: 0.50 lb(s)
Stock quantity: 10

303. 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.62 USD
SKU: 2029
Weight: 0.07 lb(s)
Stock quantity: 284

304. 1/2" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.08 USD
SKU: 1856
Weight: 0.11 lb(s)

305. 1/2" C x F x C Tee

C x F x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.94 USD
SKU: 1861
Weight: 0.18 lb(s)
Stock quantity: 5

306. 1/2" Comp. x 3/8" Comp. 1/4 Turn Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 4.75 USD
SKU: 4982
Weight: 0.20 lb(s)
Stock quantity: 18

307. 1/2" Compression x 3/8" Female IPS Elbow

Price: 5.19 USD
SKU: 3571
Weight: 0.10 lb(s)
Stock quantity: 0

308. 1/2" Concealed Pendent Sprinkler, Standard Response 5.6 K-factor

Thread size: 1/2" NPT or ISO 7-1 R1 Nominal K-factor: 5.6 (80 metric) Maximum working pressure: 175 psi (12 bar) – 100% factory hydrostatically tested to 500 psi (34.5 bar) Sprinkler Installation Wrench: Model FC wrenchModel G5-56

Price: 9.30 USD
SKU: 1875
Weight: 0.50 lb(s)
Stock quantity: 234

309. 1/2" Copper 45° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.68 USD
SKU: 1987
Weight: 0.04 lb(s)

310. 1/2" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.36 USD
SKU: 2004
Weight: 0.05 lb(s)

311. 1/2" Copper Caps

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.26 USD
SKU: 1866
Weight: 0.02 lb(s)

312. 1/2" Copper Coupling (Socket) w/Tube Stop

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.30 USD
SKU: 1911
Weight: 0.03 lb(s)
Stock quantity: 681

313. 1/2" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 0.59 USD
SKU: 1609
Weight: 0.12 lb(s)
Stock quantity: 124

314. 1/2" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69

Price: 2.43 USD
SKU: 1592
Weight: 0.50 lb(s)
Stock quantity: 90

315. 1/2" Copper Epoxy Coated Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 0.67 USD
SKU: 1591
Weight: 0.09 lb(s)
Stock quantity: 111

316. 1/2" Copper Epoxy Coated Strut Clamp

Price: 0.99 USD
SKU: 1507
Weight: 0.09 lb(s)
Stock quantity: 67

317. 1/2" Copper Female x 1/2" Cast Copper Union

Price: 8.25 USD
SKU: 1863
Weight: 0.14 lb(s)
Stock quantity: 5

318. 1/2" Copper Slip Coupling (Socket)

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.38 USD
SKU: 1951
Weight: 0.03 lb(s)

319. 1/2" Copper Two Hole Strap

Price: 0.20 USD
SKU: 1401
Weight: 0.04 lb(s)
Stock quantity: 758

320. 1/2" Copper x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 4.83 USD
SKU: 5196
Weight: 0.30 lb(s)
Stock quantity: 0

321. 1/2" Copper x 1/2" Cast Copper Union

Price: 4.92 USD
SKU: 1826
Weight: 0.18 lb(s)
Stock quantity: 29

322. 1/2" Copper x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 4.09 USD
SKU: 2544
Weight: 0.30 lb(s)
Stock quantity: 57

323. 1/2" Copper x 3/8" Wall Thickness 6 ft. Length Thermacell Insulation

Price: 2.89 USD
SKU: 3878
Weight: 0.05 lb(s)
Stock quantity: 179

324. 1/2" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.20 USD
SKU: 2134
Weight: 0.09 lb(s)

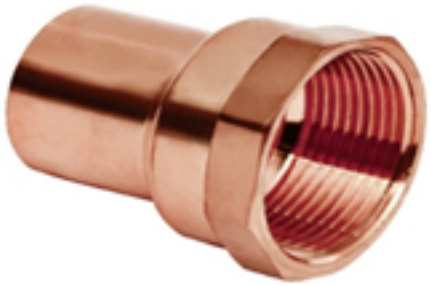

325. 1/2" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.76 USD
SKU: 2158
Weight: 0.07 lb(s)

326. 1/2" Double Expansion Shield Anchor

Price: 1.93 USD
SKU: 1682
Weight: 0.40 lb(s)
Stock quantity: 99

327. 1/2" Female IPS x Garden Hose Male Adapter (Bushing)

Price: 2.80 USD
SKU: 3618
Stock quantity: 13

328. 1/2" Female IPS x Garden Hose Female Coupling

Price: 3.38 USD
SKU: 2775
Weight: 0.30 lb(s)
Stock quantity: 17

329. 1/2" Finish Hex Nut Zinc (Box of 50)

Material: SteelFinish: Zinc

Price: 0.16 USD
SKU: 4701
Weight: 2.00 lb(s)
Stock quantity: 1233

330. 1/2" Fitting Brush w/ Wire Handle

Price: 1.87 USD
SKU: 1405
Weight: 0.17 lb(s)
Stock quantity: 55

331. 1/2" FTG x Copper 45° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.83 USD
SKU: 1996
Weight: 0.04 lb(s)

332. 1/2" FTG x Copper 90° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.54 USD
SKU: 2020
Weight: 0.04 lb(s)

333. 1/2" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.06 USD
SKU: 2865
Weight: 0.21 lb(s)
Stock quantity: 0

334. 1/2" Galvanized 45° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.55 USD
SKU: 2902
Weight: 0.18 lb(s)
Stock quantity: 0

335. 1/2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 0.98 USD
SKU: 2831
Weight: 0.23 lb(s)
Stock quantity: 10

336. 1/2" Galvanized 90° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.49 USD
SKU: 2888
Weight: 0.22 lb(s)
Stock quantity: 0

337. 1/2" Galvanized Cap

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 0.76 USD
SKU: 2874
Weight: 0.12 lb(s)
Stock quantity: 10

338. 1/2" Galvanized Ceiling Flange

Price: 0.78 USD
SKU: 4321
Weight: 0.18 lb(s)
Stock quantity: 82

339. 1/2" Galvanized Clevis Hanger

Pipe Size: 1/2"Max. Rec. Load: 730 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 0.99 USD

SKU: 8608

Weight: 0.24 lb(s)

Stock quantity: 141

340. 1/2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 0.97 USD
SKU: 3003
Weight: 0.18 lb(s)
Stock quantity: 0

341. 1/2" Galvanized Drop-In Anchor

Price: 0.96 USD
SKU: 2223
Weight: 0.40 lb(s)
Stock quantity: 239

342. 1/2" Galvanized Junior Beam Clamp

Max. Pipe Size: 8"Max. Rec. Load: 500 lbs.Approvals: Complies with Federal Specifications A-A1192A (Type 19) and Manufacturers' Standardization Society ANSI/ MSS SPSP-58 (Type 19) which supersedes ANSI/MSS SP-69, Factory Mutual Approved.

Price: 1.29 USD
SKU: 2142
Weight: 0.34 lb(s)
Stock quantity: 398

343. 1/2" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 2.29 USD

SKU: 8480

Weight: 1.05 lb(s)

Stock quantity: 46

344. 1/2" Galvanized Rod Coupling

Material: Carbon steelFinish: Electro-GalvanizedMax. Rec. Load: 1350 lbs.

Price: 0.73 USD
SKU: 1382
Weight: 0.11 lb(s)
Stock quantity: 65

345. 1/2" Galvanized Round Washer (Box of 100)

Material: Carbon steelFinish: Electro-galvanized

Price: 0.13 USD
SKU: 1082
Weight: 3.40 lb(s)
Stock quantity: 1542

346. 1/2" Galvanized Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 0.75 USD
SKU: 1080
Weight: 0.14 lb(s)
Stock quantity: 50

347. 1/2" Galvanized Strut Clamp

Price: 0.61 USD
SKU: 1737
Weight: 0.10 lb(s)
Stock quantity: 154

348. 1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 0.96 USD
SKU: 2913
Weight: 0.34 lb(s)
Stock quantity: 5

349. 1/2" Galvanized Two Hole Strap

Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.May be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4” X 1” tek type screwsApprovals: Underwriters Laboratories listed for US and Canada.

Price: 0.20 USD
SKU: 2236
Weight: 0.04 lb(s)
Stock quantity: 152

350. 1/2" Galvanized Union

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.58 USD
SKU: 271
Weight: 0.40 lb(s)
Stock quantity: 0

351. 1/2" Galvanized Wide Mouth Beam Clamp

Malleable iron with hardened steel cup point set screw and locknutMax. Pipe Size: 8"Max. Rec. Load: 500 lbs.Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), and Factory Mutual Approved. Complies with Federal Specifications A-A-1192A (Type 19) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 19) which supersedes ANSI/MSS SP-69

Price: 1.70 USD

SKU: 1986

Weight: 0.35 lb(s)

Stock quantity: 55

352. 1/2" Heavy-Duty, Professional Brush

Price: 4.59 USD
SKU: 8843
Weight: 0.30 lb(s)
Stock quantity: 0

353. 1/2" Horizontal Sidewall Sprinkler, Standard Response 5.6 K-factor

Water working pressure rating - 175 psi (12 Bars)Factory tested hydrostatically to 500 psi (34 Bars) Maximum low temperature glass bulb rating is -67°F (-55°C)Chrome platedFrame: BronzeDeflector: BrassScrew: BrassBulb Seat: CopperSpring: Nickel alloySeal: TeflonModel GL5670

Price: 10.32 USD
SKU: 4881
Weight: 0.40 lb(s)
Stock quantity: 122

354. 1/2" IPS x 20" Stainless Steel Braided Connector

Temperature rating: 40° to 140°F, intermittent to 180°F Pressure rating: 125 psi maximum IAPMO and CSA listed to ASME A112.18.6/CSA B125.6

Price: 4.64 USD
SKU: 390
Weight: 0.46 lb(s)
Stock quantity: 89

355. 1/2" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 5.30 USD
SKU: 1850
Weight: 0.34 lb(s)
Stock quantity: 45

356. 1/2" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 5.64 USD
SKU: 7664
Weight: 0.34 lb(s)
Stock quantity: 74

357. 1/2" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 8.10 USD
SKU: 4912
Weight: 0.34 lb(s)
Stock quantity: 52

358. 1/2" IPS Chrome Plated Bell Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.78 USD
SKU: 2493
Weight: 0.03 lb(s)
Stock quantity: 48

359. 1/2" IPS Chrome Plated Escutcheon (2 Pieces)

Chrome FinishMade of Steel

Price: 1.75 USD
SKU: 549
Weight: 0.03 lb(s)
Stock quantity: 85

360. 1/2" IPS Chrome Plated Shallow Escutcheon

Chrome FinishMade of Steel

Price: 0.31 USD
SKU: 2816
Weight: 0.03 lb(s)
Stock quantity: 146

361. 1/2" IPS Chrome Plated Split Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.88 USD
SKU: 4792
Weight: 0.03 lb(s)
Stock quantity: 36

362. 1/2" IPS Gate Valve

Pressure rating 200 psi wogTemperaure rating is 180°FCast brass constructionConforms to NSF / ANSI 372, AB 1953

Price: 8.87 USD
SKU: 2753
Weight: 0.55 lb(s)
Stock quantity: 37

363. 1/2" IPS Long Bonnet Ball Valve

Long Bonnet T- handle allows easy shutoff access Solder Ends Forged brass Body175 psi steam 600 psi WOG Temperature range is 20°F to 240°F CSA Approved

Price: 10.80 USD
SKU: 5505
Weight: 0.50 lb(s)
Stock quantity: 17

364. 1/2" IPS Long Bonnet Gate Valve

Price: 9.46 USD
SKU: 2768
Weight: 0.60 lb(s)
Stock quantity: 5

365. 1/2" IPS Plastic Escutcheon

Crome Plated FinishMade of Plastic

Price: 1.20 USD
SKU: 4517
Weight: 0.03 lb(s)
Stock quantity: 344

366. 1/2" IPS Radiator Union Elbow

Price: 5.31 USD
SKU: 415
Stock quantity: 10

367. 1/2" IPS Spring Loaded Check Valve

Lead FreeMaximum working pressure 200 psiCast Brass spring check valve

Price: 13.80 USD
SKU: 4702
Weight: 0.30 lb(s)
Stock quantity: 2

368. 1/2" IPS Swing Check Valve

Lead FreeCast Brass swing check valve125 WSP, 200 WOGApproved By UPC, NSF

Price: 6.14 USD
SKU: 3311
Weight: 0.40 lb(s)
Stock quantity: 22

369. 1/2" IPS x 3/8" Comp. x 1/4" Comp. Double Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 8.55 USD
SKU: 3990
Weight: 0.20 lb(s)
Stock quantity: 11

370. 1/2" IPS x 1/4" Comp. Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 4.28 USD
SKU: 715
Weight: 0.20 lb(s)
Stock quantity: 15

371. 1/2" IPS x 3/8" Comp. 1/4 Turn Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 4.92 USD
SKU: 5171
Weight: 0.20 lb(s)
Stock quantity: 47

372. 1/2" IPS x 3/8" Comp. 1/4 Turn Straight Stop Valve

Lead Free (Chrome) For use in potable water distribution systemsTemperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 4.96 USD
SKU: 6654
Weight: 0.22 lb(s)
Stock quantity: 9

373. 1/2" IPS x 3/8" Comp. Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 3.47 USD
SKU: 2368
Weight: 0.20 lb(s)
Stock quantity: 56

374. 1/2" IPS X 3/8" Comp. Straight Stop Valve

Lead Free (Chrome) For use in potable water distribution systemsTemperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 4.50 USD
SKU: 3223
Weight: 0.28 lb(s)
Stock quantity: 17

375. 1/2" IPS x 3/8" Comp. x 3/8"Comp. Double Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 10.31 USD
SKU: 4065
Weight: 0.18 lb(s)
Stock quantity: 0

376. 1/2" Male IPS x Garden Hose Female Adapter

Price: 2.60 USD
SKU: 776
Weight: 0.08 lb(s)
Stock quantity: 2

377. 1/2" Male IPS x Garden Hose Male Adapter

Price: 3.90 USD
SKU: 3385
Weight: 0.30 lb(s)
Stock quantity: 20

378. 1/2" MIP x 3/4" MHT Washing Machine Box w/ Valves & Arrester

1/2" inlet connection 3/4" outlet connection Pressure rating: 150 PSI maximum Temperature rating: 250°F Lead free brass construction for durability and reliability Forward mounted valves give easy access for on/off operation Meets UPC, IPC and cUPC requirements

Price: 41.78 USD
SKU: 4202
Weight: 2.12 lb(s)
Stock quantity: 5

379. 1/2" MIP/SWT x 1/4" OD Ice Maker Box w/ Water Hammer Arrester

1/2" inlet connection 1/4" outlet connection Use Copper, PEX, CPVC, or PE-RT water lines Ice Maker Box requires no special tools, no soldering, no crimping, unions or glue. Just push to create a watertight seal to the fitting

Price: 30.60 USD
SKU: 889
Weight: 1.12 lb(s)
Stock quantity: -2

380. 1/2" OD Chrome Plated Bell Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.70 USD
SKU: 2611
Weight: 0.03 lb(s)
Stock quantity: 820

381. 1/2" OD Chrome Plated Shallow Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.46 USD
SKU: 2688
Weight: 0.03 lb(s)
Stock quantity: 74

382. 1/2" OD Chrome Plated Split Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.83 USD
SKU: 2682
Weight: 0.03 lb(s)
Stock quantity: 80

383. 1/2" Pendent Sprinkler, Quick Response 5.6 K-factor

Water working pressure rating - 175 psi (12 Bars)Factory tested hydrostatically to 500 psi (34 Bars) Maximum low temperature glass bulb rating is -67°F (-55°C)Frame - bronze Deflector - brass Screw - brass Lodgement Wire - stainless steel Bulb seat - copper Spring - nickel alloy Seal - teflonBulb - glass with glycerin solution, 5mm size Escutcheon Assembly - steelModel GL5601

Price: 9.06 USD

SKU: 8707

Weight: 0.40 lb(s)

Stock quantity: 84

384. 1/2" Pendent Sprinkler, Standard Response 5.6 K-factor

Water working pressure rating - 175 psi (12 Bars)Factory tested hydrostatically to 500 psi (34 Bars) Maximum low temperature glass bulb rating is -67°F (-55°C)Frame - bronze Deflector - brass Screw - brass Lodgement Wire - stainless steel Bulb seat - copper Spring - nickel alloy Seal - teflonBulb - glass with glycerin solution, 5mm size Escutcheon Assembly - steelModel GL5651

Price: 7.07 USD

SKU: 8657

Weight: 0.40 lb(s)

Stock quantity: 14

385. 1/2" Pendent Sprinkler, Standard Response 5.6 K-factor

Water working pressure rating - 175 psi (12 Bars)Factory tested hydrostatically to 500 psi (34 Bars) Maximum low temperature glass bulb rating is -67°F (-55°C)Chrome PlatedFrame: BronzeDeflector: BrassScrew: BrassBulb Seat: CopperSpring: Nickel alloySeal: TeflonModel: GL5651

Price: 8.71 USD

SKU: 8658

Weight: 0.40 lb(s)

Stock quantity: 6

386. 1/2" Pendent Sprinkler, Standard Response 5.6 K-factor

Water working pressure rating - 175 psi (12 Bars)Factory tested hydrostatically to 500 psi (34 Bars) Maximum low temperature glass bulb rating is -67°F (-55°C)Frame - bronze Deflector - brass Screw - brass Lodgement Wire - stainless steel Bulb seat - copper Spring - nickel alloy Seal - teflon Bulb - glass with glycerin solution, 5mm size Escutcheon Assembly - steel Model GL5651

Price: 6.74 USD

SKU: 3919

Weight: 0.50 lb(s)

Stock quantity: 33

387. 1/2" PEX 90° Elbow

Price: 1.14 USD
SKU: 6492
Weight: 0.05 lb(s)
Stock quantity: 100

388. 1/2" PEX Clamp (Box of 100)

Stainless Steel

Price: 0.32 USD
SKU: 3685
Weight: 0.90 lb(s)
Stock quantity: 498

389. 1/2" PEX Coupling

Price: 0.61 USD
SKU: 4575
Weight: 0.05 lb(s)
Stock quantity: 27

390. 1/2" PEX Tee

Price: 1.02 USD
SKU: 6486
Weight: 0.05 lb(s)
Stock quantity: 39

391. 1/2" PEX x 1/2" Female IPS Adapter

Price: 2.20 USD
SKU: 4911
Weight: 0.05 lb(s)
Stock quantity: 14

392. 1/2" PEX x 1/2" IPS Drop Ear Elbow

Price: 3.47 USD
SKU: 5999
Weight: 0.10 lb(s)
Stock quantity: 9

393. 1/2" PEX x 1/2" Male IPS Adapter

Price: 1.30 USD
SKU: 4900
Weight: 0.05 lb(s)
Stock quantity: 23

394. 1/2" PEX x 1/2" Male IPS Elbow

Price: 2.19 USD
SKU: 5062
Weight: 0.05 lb(s)
Stock quantity: 55

395. 1/2" PEX x 1/2" Sweat Copper Fitting Adapter

Price: 0.64 USD
SKU: 3771
Weight: 0.05 lb(s)
Stock quantity: 14

396. 1/2" PEX x 1/2" Sweat Copper Fitting Elbow

Price: 2.33 USD
SKU: 5069
Weight: 0.05 lb(s)
Stock quantity: 50

397. 1/2" PEX x 1/2" Sweat Copper Pipe Adapter

Price: 0.75 USD
SKU: 4502
Weight: 0.05 lb(s)
Stock quantity: 113

398. 1/2" PEX x 1/2" Sweat Copper Pipe Elbow

Price: 1.84 USD
SKU: 5092
Weight: 0.05 lb(s)
Stock quantity: 38

399. 1/2" PEX x 3/4" Female IPS Adapter

Price: 2.47 USD
SKU: 6083
Weight: 0.05 lb(s)
Stock quantity: 21

400. 1/2" PEX x 3/4" IPS Male Elbow

Price: 3.24 USD
SKU: 3793
Weight: 0.05 lb(s)
Stock quantity: 0

401. 1/2" PEX x 3/4" Male IPS Adapter

Price: 2.38 USD
SKU: 4894
Weight: 0.05 lb(s)
Stock quantity: 78

402. 1/2" PEX x 3/4" Sweat Copper Fitting Adapter

Price: 1.47 USD
SKU: 7585
Weight: 0.05 lb(s)
Stock quantity: 33

403. 1/2" PEX x 3/4" Sweat Copper Fitting Elbow

Price: 3.06 USD
SKU: 5137
Weight: 0.05 lb(s)
Stock quantity: 25

404. 1/2" PEX x 3/4" Sweat Copper Pipe Adapter

Price: 1.88 USD
SKU: 4390
Weight: 0.05 lb(s)
Stock quantity: 44

405. 1/2" PEX x 3/4" Sweat Copper Pipe Elbow

Price: 3.26 USD
SKU: 3779
Weight: 0.05 lb(s)
Stock quantity: 20

406. 1/2" Plastic Two Hole Strap

Price: 0.21 USD
SKU: 2383
Weight: 0.08 lb(s)
Stock quantity: 1467

407. 1/2" Power Deuce Copper Fitting Brush Tool

Cat #628201/2” I.D. (5/8” O.D.)

Price: 7.88 USD
SKU: 8838
Weight: 0.30 lb(s)
Stock quantity: 0

408. 1/2" PVC Check Valve (Solvent)

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 6.00 USD
SKU: 6065
Weight: 0.30 lb(s)

409. 1/2" PVC Check Valve (Threaded)

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 6.00 USD
SKU: 50001
Weight: 0.30 lb(s)

410. 1/2" PVC Pressure 90° Street Elbow (HUB x SPIGOT)

ASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.19 USD
SKU: 2528
Weight: 0.06 lb(s)
Stock quantity: 32

411. 1/2" PVC Pressure Cap

Maximum service temperature 140°FNSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.41 USD
SKU: 3575
Weight: 0.03 lb(s)
Stock quantity: 14

412. 1/2" PVC Pressure Coupling

Maximum service temperature 140°FDo not test or use with compressed air or other gasesSLIP x SLIP connectionsASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.27 USD
SKU: 2541
Weight: 0.04 lb(s)
Stock quantity: 34

413. 1/2" PVC Pressure Female Adapter (SLIP x FIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.47 USD
SKU: 2556
Weight: 0.04 lb(s)
Stock quantity: 23

414. 1/2" PVC Pressure Male Adapter (SLIP x MIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedSize range 1¼" to 4"

Price: 0.43 USD
SKU: 2563
Weight: 0.03 lb(s)
Stock quantity: 22

415. 1/2" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.54 USD
SKU: 2548
Weight: 0.07 lb(s)
Stock quantity: 19

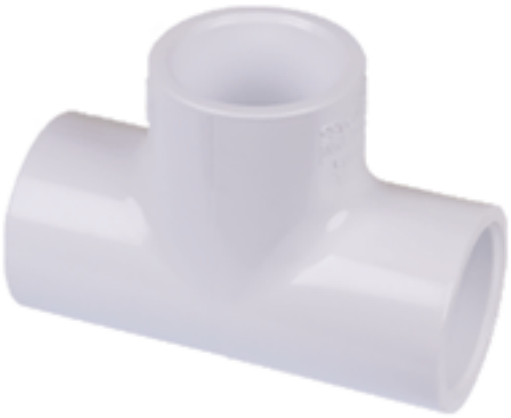

416. 1/2" Quarter Turn Boiler Drain Cock

Price: 4.61 USD
SKU: 3560
Weight: 0.30 lb(s)
Stock quantity: 2

417. 1/2" Quick-Plug with Gasket

No tools requiredEasy manual installationReduses time and laborNo thread seal requiredReusable and long lasting Smooth thread end for easy plasteringConstructed of plastic for durabilityO-ring seals and keeps debris outSimple screw-in place desing Ideal for shover and tub valve installations

Price: 2.88 USD
SKU: 8746
Weight: 0.30 lb(s)
Stock quantity: 93

418. 1/2" SCH 40 PVC Ball Valve

Pressure rating is 150 psi at 73°FConnection Type: SolventProvides great strength and resistance to corrosion and chemicalsCompact and lightweight design

Price: 2.48 USD
SKU: 2428
Weight: 0.20 lb(s)
Stock quantity: 0

419. 1/2" Side Mount Angle Thermostatic Radiator Valve

Price: 28.93 USD
SKU: 4373
Weight: 0.90 lb(s)
Stock quantity: 0

420. 1/2" Sprinkler Hanger NFPA

Material: Carbon steel Finish: Pre-galvanizedMax. Rec. Load: 300 lbs.Pipe Size: 1/2"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69.

Price: 0.33 USD

SKU: 5969

Weight: 0.10 lb(s)

Stock quantity: 0

421. 1/2" Steam Angle Radiator Valve

Price: 11.56 USD
SKU: 2425
Weight: 0.80 lb(s)
Stock quantity: 10

422. 1/2" Steam Straight Radiator Valve

Price: 9.50 USD
SKU: 3233
Weight: 1.00 lb(s)
Stock quantity: 0

423. 1/2" Straight Steam Trap

Price: 44.80 USD
SKU: 3258
Weight: 1.80 lb(s)
Stock quantity: 17

424. 1/2" Straight Thermostatic Radiator Valve

Price: 32.10 USD
SKU: 4254
Weight: 0.66 lb(s)
Stock quantity: 0

425. 1/2" Suspension Clamp

Price: 0.25 USD
SKU: 2264
Weight: 0.01 lb(s)
Stock quantity: 1077

426. 1/2" Sweat Ball Valve

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 4.80 USD
SKU: 2273
Weight: 0.40 lb(s)
Stock quantity: 22

427. 1/2" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 5.38 USD
SKU: 7654
Weight: 0.40 lb(s)
Stock quantity: 98

428. 1/2" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 8.10 USD
SKU: 6042
Weight: 0.40 lb(s)
Stock quantity: 60

429. 1/2" Sweat Check Valve

For installing on copper pipe using standard copper soldering methodArrow on the valve body shows direction of the flowSuitable for upright horizontal and vertical (arrow pointing upward) installations in plumbing and heating systems Pressure Ratings: 200 psi Non-Shock WOGConstruction: Lead-Free Brass Body

Price: 6.48 USD

SKU: 3300

Weight: 0.36 lb(s)

430. 1/2" Sweat Gate Valve

Price: 6.63 USD
SKU: 2281
Weight: 0.55 lb(s)
Stock quantity: 18

431. 1/2" Sweat Inlet x 1/2" F NTP Outlet Backflow Preventer and AutoFill Combination

Max inlet pressure: 175 psiMax working temp: 150˚FSetting pressure range: 3 - 60 psiPreset outlet pressure: 15 psi573009A Model (573)

Price: 144.29 USD
SKU: 8559
Weight: 5.00 lb(s)
Stock quantity: 5

432. 1/2" Sweat Long Bonnet Ball Valve

Long Bonnet T- handle allows easy shutoff access Solder Ends Forged brass BodyChrome plated ball 175 psi steam 600 psi WOG Temperature range is 20°F to 240°F. CSA Approved

Price: 11.51 USD
SKU: 3286
Weight: 0.60 lb(s)
Stock quantity: 0

433. 1/2" Sweat Long Bonnet Gate Valve

Price: 10.24 USD
SKU: 2936
Weight: 0.77 lb(s)
Stock quantity: 8

434. 1/2" SWT x 1/4" Comp. Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 3.92 USD
SKU: 3881
Weight: 0.20 lb(s)
Stock quantity: 15

435. 1/2" SWT x 3/8" Comp. 1/4 Turn Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 4.42 USD
SKU: 5240
Weight: 0.20 lb(s)
Stock quantity: 58

436. 1/2" SWT x 3/8" Comp. 1/4 Turn Straight Stop Valve

Lead Free (Chrome) For use in potable water distribution systemsTemperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 4.22 USD
SKU: 6655
Weight: 0.22 lb(s)
Stock quantity: 17

437. 1/2" SWT x 3/8" Comp. Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 3.90 USD
SKU: 2357
Weight: 0.20 lb(s)
Stock quantity: 207

438. 1/2" SWT X 3/8" Comp. Straight Stop Valve

Lead Free (Chrome) For use in potable water distribution systemsTemperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 4.34 USD
SKU: 2823
Weight: 0.26 lb(s)
Stock quantity: 23

439. 1/2" SWT x 3/8" Comp. w/5" Ext Angle Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 8.55 USD
SKU: 2308
Weight: 0.32 lb(s)
Stock quantity: 30

440. 1/2" Trap Primer

Lead FreeMaximum supply pressure: 125psiMinimum supply pressure must exceed 25psi

Price: 39.00 USD
SKU: 6110
Weight: 0.97 lb(s)
Stock quantity: 28

441. 1/2" Upright Sprinkler, Quick Response 5.6 K-factor

Price: 9.06 USD
SKU: 8706
Weight: 0.40 lb(s)
Stock quantity: 72

442. 1/2" Upright Sprinkler, Standard Response 5.6 K-factor

Water working pressure rating - 175 psi (12 Bars)Factory tested hydrostatically to 500 psi (34 Bars) Maximum low temperature glass bulb rating is -67°F (-55°C)Frame - bronze Deflector - brass Screw - brass Lodgement Wire - stainless steel Bulb seat - copper Spring - nickel alloy Seal - teflonBulb - glass with glycerin solution, 5mm size Escutcheon Assembly - steelModel GL5661

Price: 7.24 USD

SKU: 4005

Weight: 0.50 lb(s)

Stock quantity: 89

443. 1/2" Upright Sprinkler, Standard Response 5.6 K-factor

Water working pressure rating - 175 psi (12 Bars)Factory tested hydrostatically to 500 psi (34 Bars) Maximum low temperature glass bulb rating is -67°F (-55°C)Frame - bronze Deflector - brass Screw - brass Lodgement Wire - stainless steel Bulb seat - copper Spring - nickel alloy Seal - teflonBulb - glass with glycerin solution, 5mm size Escutcheon Assembly - steel

Price: 6.47 USD
SKU: 3742
Weight: 0.50 lb(s)
Stock quantity: 26

444. 1/2" x 3/8" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.01 USD
SKU: 3942
Weight: 0.16 lb(s)
Stock quantity: 24

445. 1/2" x 3/8" Galvanized Rod Coupling

Material: Carbon steelFinish: Electro-GalvanizedMax. Rec. Load: 1350 lbs.

Price: 1.75 USD
SKU: 2312
Weight: 0.11 lb(s)
Stock quantity: 156

446. 1/2" x 1" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 8.33 USD
SKU: 1884
Weight: 0.30 lb(s)
Stock quantity: 3

447. 1/2" x 1" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.07 USD
SKU: 2168
Weight: 0.27 lb(s)

448. 1/2" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.33 USD
SKU: 57
Weight: 0.51 lb(s)
Stock quantity: 0

449. 1/2" x 1/2" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.90 USD
SKU: 2039
Weight: 0.13 lb(s)

450. 1/2" x 1/2" x 3/8" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.71 USD
SKU: 2590
Weight: 0.15 lb(s)

451. 1/2" x 1/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.96 USD
SKU: 269
Weight: 0.17 lb(s)
Stock quantity: 5

452. 1/2" x 1/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.74 USD
SKU: 407
Weight: 0.08 lb(s)
Stock quantity: 42

453. 1/2" x 1/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.17 USD
SKU: 325
Weight: 0.14 lb(s)
Stock quantity: 0

454. 1/2" x 1/4" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.32 USD
SKU: 1186
Weight: 0.18 lb(s)
Stock quantity: 45

455. 1/2" x 1/4" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.26 USD
SKU: 1245
Weight: 0.26 lb(s)
Stock quantity: 13

456. 1/2" x 1/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 4.53 USD
SKU: 1320
Weight: 0.38 lb(s)
Stock quantity: 2

457. 1/2" x 1/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.31 USD
SKU: 2832
Weight: 0.17 lb(s)
Stock quantity: 0

458. 1/2" x 1/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.49 USD
SKU: 2805
Weight: 0.08 lb(s)
Stock quantity: 0

459. 1/2" x 1/4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.04 USD
SKU: 3005
Weight: 0.14 lb(s)
Stock quantity: 1

460. 1/2" x 1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.62 USD
SKU: 3
Weight: 0.26 lb(s)
Stock quantity: 0

461. 1/2" x 1/8" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.50 USD
SKU: 6058
Weight: 0.15 lb(s)
Stock quantity: 2

462. 1/2" x 1/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.32 USD
SKU: 427
Weight: 0.09 lb(s)
Stock quantity: 61

463. 1/2" x 1/8" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.34 USD
SKU: 1834
Weight: 0.14 lb(s)
Stock quantity: 7

464. 1/2" x 1/8" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 3.24 USD
SKU: 1365
Weight: 0.25 lb(s)
Stock quantity: 0

465. 1/2" x 1/8" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 1.98 USD
SKU: 1185
Weight: 0.19 lb(s)
Stock quantity: 176

466. 1/2" x 1/8" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.71 USD
SKU: 1244
Weight: 0.26 lb(s)
Stock quantity: 16

467. 1/2" x 1/8" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.49 USD
SKU: 2804
Weight: 0.09 lb(s)
Stock quantity: 0

468. 1/2" x 1/8" x 1/2" C x F x C Tee

C x F x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.20 USD
SKU: 153
Weight: 0.27 lb(s)
Stock quantity: 2

469. 1/2" x 10' SCH 40 Black Pipe

Price: 18.20 USD
SKU: 1083
Stock quantity: 13

470. 1/2" x 10' SCH 40 Galvanized Pipe

Price: 21.28 USD
SKU: 5994
Stock quantity: 0

471. 1/2" x 10' SCH40 PVC DWV Pipe

Price: 3.82 USD
SKU: 3533
Stock quantity: 10

472. 1/2" x 10' Type L Copper Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.40"

Price: 13.67 USD
SKU: 2188
Weight: 2.85 lb(s)
Stock quantity: 173

473. 1/2" x 10" Copper M Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.028"

Price: 11.25 USD
SKU: 8513
Weight: 20.40 lb(s)
Stock quantity: 19

474. 1/2" x 10" Frost Free Sillcock

Price: 21.78 USD
SKU: 1858
Weight: 1.05 lb(s)
Stock quantity: 8

475. 1/2" x 1000" Gas Guard PTFE Thread Seal Tape (Yellow)

#70826Composition: 99.0% PTFE Color: YellowThickness: 0.004" +/-10% (0.102mm +/-10%)Density: 1.5g/cm3 +/-10%Elongation: >100%Temperature range: -400°F to +500°F (-268°C to + 260°C) PTFE is completely stable up to +500°F or +260°C. Decomposition is slow up to 750°F or 400°C. Although decomposition will occur on contact with naked flamesTensile strength: 10-17 N/mm2Certified to comply with the provisions of MilSpec T-27730A, UL-listed, CSA approved

Price: 8.85 USD

SKU: 8831

Weight: 0.30 lb(s)

Stock quantity: 0

476. 1/2" x 1000" Gray PTFE Grriptape

Reduced tensile strength and expanded elongation allows the tape to grip to threads easily with a tackier textureGray color blends in better to shower heads and fixtures offering a cleaner finished lookCan be used on various pipe material including stainless steel, PVC, ABS, aluminum and moreUL Listed Professional Grade TapeSeals stainless steel, cast iron, pvc, cpvc, and abs pipes, brass and chrome fittings, gas connections and more

Price: 2.84 USD
SKU: 8760
Weight: 0.30 lb(s)
Stock quantity: 293

477. 1/2" x 1-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.19 USD
SKU: 1594
Weight: 0.08 lb(s)
Stock quantity: 81

478. 1/2" x 1-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.57 USD
SKU: 3616
Weight: 0.11 lb(s)
Stock quantity: 9

479. 1/2" x 1-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.72 USD
SKU: 872
Weight: 0.11 lb(s)
Stock quantity: 92

480. 1/2" x 12" Frost Free Sillcock

Price: 25.78 USD
SKU: 1878
Weight: 1.10 lb(s)
Stock quantity: 2

481. 1/2" x 1296" Teflon Tape (Gray)

Size: 1/2" x 1296"

Price: 1.82 USD
SKU: 8434
Weight: 0.01 lb(s)
Stock quantity: 45

482. 1/2" x 14" Frost Free Sillcock

Price: 27.82 USD
SKU: 4433
Weight: 1.25 lb(s)
Stock quantity: 2

483. 1/2" x 1429" PTFE Thread Seal Tape

Price: 2.67 USD
SKU: 6398
Weight: 0.30 lb(s)
Stock quantity: 0

484. 1/2" x 2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.11 USD
SKU: 1595
Weight: 0.12 lb(s)
Stock quantity: 94

485. 1/2" x 2" Galvanized Fender Washer (Box of 100)

Material: Carbon steelFinish: Electro-galvanized

Price: 0.31 USD
SKU: 1497
Weight: 5.04 lb(s)
Stock quantity: 300

486. 1/2" x 2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.57 USD
SKU: 3264
Weight: 0.15 lb(s)
Stock quantity: 9

487. 1/2" x 2" Hex Tap Bolt

Price: 0.60 USD
SKU: 2198
Weight: 0.30 lb(s)
Stock quantity: 26

488. 1/2" x 2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.09 USD
SKU: 591
Weight: 0.15 lb(s)
Stock quantity: 134

489. 1/2" x 2-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.48 USD
SKU: 1596
Weight: 0.16 lb(s)
Stock quantity: 191

490. 1/2" x 2-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.70 USD
SKU: 3277
Weight: 0.20 lb(s)
Stock quantity: 29

491. 1/2" x 2-1/2" Hex Tap Bolt

Price: 0.37 USD
SKU: 2213
Weight: 0.40 lb(s)
Stock quantity: 111

492. 1/2" x 2-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.82 USD
SKU: 573
Weight: 0.20 lb(s)
Stock quantity: 89

493. 1/2" x 260" Gray PTFE Grriptape

Reduced tensile strength and expanded elongation allows the tape to grip to threads easily with a tackier textureGray color blends in better to shower heads and fixtures offering a cleaner finished lookCan be used on various pipe material including stainless steel, PVC, ABS, aluminum and moreUL Listed Professional Grade TapeSeals stainless steel, cast iron, pvc, cpvc, and abs pipes, brass and chrome fittings, gas connections and more

Price: 0.96 USD
SKU: 8762
Weight: 0.30 lb(s)
Stock quantity: 236

494. 1/2" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.91 USD
SKU: 1597
Weight: 0.20 lb(s)
Stock quantity: 30

495. 1/2" x 3" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.70 USD
SKU: 3283
Weight: 0.24 lb(s)
Stock quantity: 25

496. 1/2" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.86 USD
SKU: 574
Weight: 0.24 lb(s)
Stock quantity: 61

497. 1/2" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 2.71 USD
SKU: 328
Weight: 1.47 lb(s)
Stock quantity: 5

498. 1/2" x 3/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 5.93 USD
SKU: 1343
Weight: 0.60 lb(s)
Stock quantity: 2

499. 1/2" x 3/4" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.66 USD
SKU: 6607
Weight: 0.13 lb(s)

500. 1/2" x 3/4" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.24 USD
SKU: 2169
Weight: 0.16 lb(s)

501. 1/2" x 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.21 USD
SKU: 32
Weight: 0.48 lb(s)
Stock quantity: 0

502. 1/2" x 3/8" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.96 USD
SKU: 34
Weight: 0.19 lb(s)
Stock quantity: 14

503. 1/2" x 3/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.32 USD
SKU: 392
Weight: 0.06 lb(s)
Stock quantity: 21

504. 1/2" x 3/8" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 3.50 USD
SKU: 1374
Weight: 0.30 lb(s)
Stock quantity: 3

505. 1/2" x 3/8" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 1.65 USD
SKU: 1187
Weight: 0.16 lb(s)
Stock quantity: 10

506. 1/2" x 3/8" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.02 USD
SKU: 1246
Weight: 0.28 lb(s)
Stock quantity: 1

507. 1/2" x 3/8" Brass Flush Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 1.31 USD
SKU: 3695
Weight: 0.16 lb(s)
Stock quantity: 0

508. 1/2" x 3/8" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.01 USD
SKU: 1886
Weight: 0.07 lb(s)

509. 1/2" x 3/8" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.00 USD
SKU: 1901
Weight: 0.05 lb(s)

510. 1/2" x 3/8" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.21 USD
SKU: 2833
Weight: 0.19 lb(s)
Stock quantity: 0

511. 1/2" x 3/8" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.49 USD
SKU: 2806
Weight: 0.06 lb(s)
Stock quantity: 0

512. 1/2" x 3/8" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 0.97 USD
SKU: 3006
Weight: 0.16 lb(s)
Stock quantity: 0

513. 1/2" x 3/8" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.02 USD
SKU: 19
Weight: 0.29 lb(s)
Stock quantity: 0

514. 1/2" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 3.85 USD
SKU: 1598
Weight: 0.24 lb(s)
Stock quantity: 45

515. 1/2" x 3-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.82 USD
SKU: 2785
Weight: 0.29 lb(s)
Stock quantity: 9

516. 1/2" x 3-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.92 USD
SKU: 586
Weight: 0.29 lb(s)
Stock quantity: 71

517. 1/2" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 3.92 USD
SKU: 1599
Weight: 0.28 lb(s)
Stock quantity: 37

518. 1/2" x 4" Carriage Bolt

Price: 3.34 USD
SKU: 1909
Weight: 0.55 lb(s)
Stock quantity: 20

519. 1/2" x 4" Frost Free Sillcock

Price: 12.87 USD
SKU: 3905
Weight: 0.90 lb(s)
Stock quantity: 5

520. 1/2" x 4" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.88 USD
SKU: 3302
Weight: 0.35 lb(s)
Stock quantity: 16

521. 1/2" x 4" Hex Tap Bolt

Price: 1.12 USD
SKU: 4316
Weight: 0.55 lb(s)
Stock quantity: 28

522. 1/2" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.96 USD
SKU: 587
Weight: 0.35 lb(s)
Stock quantity: 65

523. 1/2" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 4.32 USD
SKU: 1600
Weight: 0.32 lb(s)
Stock quantity: 44

524. 1/2" x 4-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.96 USD
SKU: 3313
Weight: 0.39 lb(s)
Stock quantity: 9

525. 1/2" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.99 USD
SKU: 544
Weight: 0.39 lb(s)
Stock quantity: 69

526. 1/2" x 5 SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.03 USD
SKU: 545
Weight: 0.42 lb(s)
Stock quantity: 114

527. 1/2" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 5.20 USD
SKU: 1601
Weight: 0.36 lb(s)
Stock quantity: 41

528. 1/2" x 5" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.94 USD
SKU: 3321
Weight: 0.42 lb(s)
Stock quantity: 0

529. 1/2" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 4.93 USD
SKU: 1602
Weight: 0.40 lb(s)
Stock quantity: 26

530. 1/2" x 5-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.13 USD
SKU: 3235
Weight: 0.49 lb(s)
Stock quantity: 9

531. 1/2" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.07 USD
SKU: 533
Weight: 0.49 lb(s)
Stock quantity: 78

532. 1/2" x 520" Teflon Tape

Use on plastic, brass, copper, aluminum, galvanized-steel and black-iron pipingProvides a strong tight seal for threaded joints

Price: 1.07 USD
SKU: 2244
Weight: 0.03 lb(s)
Stock quantity: 1111

533. 1/2" x 6' Galvanized Threaded Rod

Use a metal saw for cutting to suit your project needsFeatures long-lasting durable zinc-plated steel construction

Price: 4.80 USD
SKU: 1887
Weight: 2.14 lb(s)
Stock quantity: 201

534. 1/2" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 6.71 USD
SKU: 1603
Weight: 0.43 lb(s)
Stock quantity: 34

535. 1/2" x 6" Carriage Bolt

Price: 4.21 USD
SKU: 1927
Weight: 0.60 lb(s)
Stock quantity: 0

536. 1/2" x 6" Frost Free Sillcock

Price: 15.28 USD
SKU: 3655
Weight: 0.90 lb(s)
Stock quantity: 10

537. 1/2" x 6" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.13 USD
SKU: 3244
Weight: 0.52 lb(s)
Stock quantity: 9

538. 1/2" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.15 USD
SKU: 534
Weight: 0.52 lb(s)
Stock quantity: 38

539. 1/2" x 6" SDS-Plus Carbide Drill Bit

Price: 8.40 USD
SKU: 6320
Weight: 0.10 lb(s)
Stock quantity: 8

540. 1/2" x 8" Frost Free Sillcock

Price: 21.78 USD
SKU: 1840
Weight: 1.00 lb(s)
Stock quantity: 6

541. 1/2" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.92 USD
SKU: 1593
Weight: 0.06 lb(s)
Stock quantity: 64

542. 1/2" x Close Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.57 USD
SKU: 3252
Weight: 0.08 lb(s)
Stock quantity: 9

543. 1/2" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.68 USD
SKU: 592
Weight: 0.08 lb(s)
Stock quantity: 48

544. 1/2", 24 Vac Standing Pilot Gas Valve

Controls include manual valve, two automatic operators, servo pressure regulator and pilot adjustment. Meet codes requiring dual safety shutoff. All adjustments, wiring connections and pilot outlet are accessible from top of control. Temperature Range: 0° to 175°FCompact size

Price: 93.67 USD
SKU: 4949

545. 1/2"Brass Sprinkler Extension

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.19 USD
SKU: 4882
Weight: 0.60 lb(s)
Stock quantity: 344

546. 1/2"x 1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 1.76 USD
SKU: 4019
Weight: 0.26 lb(s)
Stock quantity: 1

547. 1/25 HP 3 Speed Cast Iron Circulator Pump (Astro 2- Series, Model 230CI)

Cross-reference information is printed on the box, for convenient access e-Coating on the inside of cast-iron volutes provides enhanced corrosion protection for improved reliability Flange-to-flange compatibility offers quick and easy exchange of competing models Large wiring box and convenient plug-in terminal strip save timeHigh-flow check valve, is pre-installed for convenience. Where the installation does not call for a check valve, it can be removed in secondsMax. fluid temperature: 230°FMax. working pressure: 150 psiCertification: etl listed for US and Canada (conforms to ul std.778 certified to csa std. c22.2 no.108-01) nsf 372 (for lead free bronze and stainless steel models)

Price: 101.86 USD

SKU: 3704

Weight: 8.00 lb(s)

Stock quantity: 10

548. 1/25 HP 3-Speed Circulator Pump w/Check Valve (Astro 2- Series, Model 230SS)

Stainless steel body constructionCeramic shaft and bearingsCross-reference information is printed on the box, for convenient accesse-coating on the inside of cast-iron volutes provides enhanced corrosion protection for improved reliabilityFlange-to-flange and bolt-to-bolt compatibility offers quick and easy exchange of competing modelsPlug-in terminal strip saves timeHigh-flow check valve, is pre-installed for convenience. Where the installation does not call for a check valve, it can be removed in secondsCertified Max. fluid temperature: 230°FMax. working pressure: 150 psi

Price: 231.07 USD
SKU: 3522
Weight: 8.00 lb(s)
Stock quantity: 10

549. 1/25 HP Stainless Steel Circulator Pump (Series 007, Model 007-SF5)

Standard high capacity output compact designQuiet, efficient operationUnique replaceable cartridge design-field serviceableDirect drive-low power consumptionSelf-lubricatingNo mechanical sealUnmatched reliability-maintenance freeStainless steel constructionMinimum Fluid Temperature: 40˚FMaximum Fluid Temperature: 230°FMaximum Working Pressure: 125 psi

Price: 304.21 USD

SKU: 4553

Weight: 7.00 lb(s)

Stock quantity: 0

550. 1/3 HP Cast Iron Sump Pump (SP33VF-Model)

Vertical float switch provides reliable automatic-operation in sump pits 11"Cast iron vortex impeller permits handling of typical sump debrisPermanent split capacitor (PSC) motor for more efficient operating range 30' of head shutoff provides broader operating range for most applicationsGFCI Compatible for safety and NEC 210.8 (A) Compliance

Price: 131.01 USD
SKU: 4088
Weight: 30.00 lb(s)
Stock quantity: 0

551. 1/3 HP Compact/Low Profile Drain Pump (Model 404)

Fully automatic operation Integrally molded rubber gaskets for a superior gas-tight sealOil-filled, hermetically sealed motor with thermal-overload protection; 10 ft., 3 wire power cord with grounded plug Corrosion-resistant polyolefin basin with molded-in connectionsMaintenance-free, permanently lubricated sealed bearings3/8" Solids-Handling Maximum fluid temperature

Price: 233.44 USD
SKU: 8444
Weight: 13.00 lb(s)
Stock quantity: 0

552. 1/3 HP Poly/Cast Iron Sump Pump (S37-Series)

Quiet running, Heavy-Duty 1/3 HP motor Cast iron motor plate Heavy-duty vertical style float switchVertical Float-Intergrally WiredPermanently lubricated upper and lower ball bearings 1/4" solids-handling with higher intake screeningBi-directional dual lip shaft seal1-1/2" NPT dischargeThermoplastic vortex style impeller with improved clearances for better debris handlingWater directed flow in cast motor plate allows for improved cooling of motorStainless steel fasteners

Price: 144.00 USD

SKU: 8582

Weight: 14.00 lb(s)

Stock quantity: 2

553. 1/3 HP Sump Pump (6EC-CIA-SFS Model)

Heavy-duty cast iron construction Permanent split capacitor (PSC) motor with thermal overload protection Designed for continuous duty Energy-saving low amp draw 1-1/2" FNPT discharge (38 mm) Handles up to 1/2" (12.7 mm) solids Multiple switch options for automatic operation 140 °F (60 °C) liquid temperature rating cCSAus listedItem 506807

Price: 159.50 USD

SKU: 8665

Weight: 28.00 lb(s)

Stock quantity: 0

554. 1/30 HP Automatic Condensate Removal Pump w/ Safety Switch (Model LCU-20S)

High impact ABS tank Wall mounts Three intake holes 3/8" O.D. outlet Barbed and threaded discharge connection Removable check valve Stainless steel shaft Thermally protected Fully automatic Quiet operation Models with an “S” include built-in safety switch Isolation pads pre-installed on tank

Price: 48.58 USD
SKU: 8446
Weight: 5.00 lb(s)
Stock quantity: 12

555. 1/30 HP Automatic Shallow Pan Condensate Removal Pump w/ Safety Switch (Model LCU-SP20S)

Built in safety switchHigh impact ABS tankWall mountsThree intake holes3/8" O.D. outletBarbed and threaded discharge connectionRemovable check valveStainless steel shaftThermally protected & quiet operation

Price: 50.86 USD
SKU: 8445
Weight: 4.50 lb(s)
Stock quantity: 9

556. 1/4 hp Cast Iron Sump Pump

FEATURE:• Rugged 1/4 hp motor, oil filled with thermal overload protection• 1/4" solids handling• 1-1/2" discharge• Hermetically sealed motor and switch cavities, and permanently lubricated bearings• Liberty’s UNI-BODY casting – a solid, one-piece housing that eliminates the lower motor seal ring found on other pumps• Integral, mid-mounted “peripheral-port” inlets – eliminate bottom suction of debris and foreign material • Maximum Fluid Temperature: 140°F• Stainless steel volute intake plate, internally mounted. Will not corrode. • 8 vane, glass reinforced thermoplastic impeller, Non-clog design. • Quick-disconnect 10' standard power cord allows replacement of cord in seconds without breaking seals to motor. (25' length optional) For 25' cord option, add a “-2” suffix to model number. Example: 247-2 for Model 247 with 25' cord. • Fasteners – all non-corrosive stainless steel • Stainless steel rotor shaftMOTOR SPECIFICATIONS: 1/4 hp 115V 6.0 amps 60Hz 3400 RPM Thermally Protected & Permanently LubricatedPERFORMANCE CURVE

Price: 212.00 USD

SKU:

Stock quantity: 22

557. 1/4" - 1- 1/8", 101 Close Quarters Tubing Cutter

Capacity: 1/4" - 1- 1/8"

Price: 24.83 USD
SKU: 282
Weight: 0.51 lb(s)
Stock quantity: 3

558. 1/4" - 1-5/8", 151 Quick-Acting Tubing Cutter

Capacity: 1/4" - 1-5/8"

Price: 49.82 USD
SKU: 4450
Weight: 1.24 lb(s)
Stock quantity: 1

559. 1/4" - 2-5/8", 152 Quick-Acting Tubing Cutter

Capacity: 1/4" - 2-5/8"

Price: 82.06 USD
SKU: 4457
Weight: 2.00 lb(s)
Stock quantity: 2

560. 1/4" Black 45° Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.50 USD
SKU: 1801
Weight: 0.10 lb(s)
Stock quantity: 10

561. 1/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.23 USD
SKU: 3456
Weight: 0.10 lb(s)
Stock quantity: 6

562. 1/4" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.87 USD
SKU: 3957
Weight: 0.10 lb(s)
Stock quantity: 5

563. 1/4" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 1.14 USD
SKU: 387
Weight: 0.50 lb(s)
Stock quantity: 16

564. 1/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.23 USD
SKU: 331
Weight: 0.09 lb(s)
Stock quantity: 7

565. 1/4" Black Solid Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 0.84 USD
SKU: 383
Weight: 0.04 lb(s)
Stock quantity: 8

566. 1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 1.69 USD
SKU: 140
Weight: 0.15 lb(s)
Stock quantity: 5

567. 1/4" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 6.09 USD
SKU: 258
Weight: 0.23 lb(s)
Stock quantity: 3

568. 1/4" Brass 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.15 USD
SKU: 1163
Weight: 0.20 lb(s)
Stock quantity: 15

569. 1/4" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 2.84 USD
SKU: 1148
Weight: 0.20 lb(s)
Stock quantity: 22

570. 1/4" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 1.87 USD
SKU: 1110
Weight: 0.16 lb(s)
Stock quantity: 10

571. 1/4" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.08 USD
SKU: 1124
Weight: 0.21 lb(s)
Stock quantity: 0

572. 1/4" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 1.83 USD
SKU: 1448
Weight: 0.14 lb(s)
Stock quantity: 24

573. 1/4" Brass Street 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.42 USD
SKU: 1423
Weight: 0.20 lb(s)
Stock quantity: 7

574. 1/4" Brass Street 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.05 USD
SKU: 1436
Weight: 0.20 lb(s)
Stock quantity: 5

575. 1/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.73 USD
SKU: 1460
Weight: 0.27 lb(s)
Stock quantity: 2

576. 1/4" Brass Union

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.98 USD
SKU: 4461
Weight: 0.34 lb(s)
Stock quantity: 2

577. 1/4" Comp. x 120" Stainless Steel Braided Ice Maker Connector

Brass 1/4 in. compression fittings on both ends Resists corrosion

Price: 21.30 USD
SKU: 6079
Weight: 1.10 lb(s)
Stock quantity: 3

578. 1/4" Compression Brass Sleeve

Price: 0.31 USD
SKU: 451
Weight: 0.10 lb(s)
Stock quantity: 31

579. 1/4" Compression Cap

Price: 0.62 USD
SKU: 1216
Weight: 0.10 lb(s)
Stock quantity: 62

580. 1/4" Compression Elbow

Price: 2.73 USD
SKU: 2539
Weight: 0.10 lb(s)
Stock quantity: 20

581. 1/4" Compression Insert

Price: 0.40 USD
SKU: 3570
Weight: 0.01 lb(s)
Stock quantity: 27

582. 1/4" Compression Nut

Price: 0.90 USD
SKU: 1227
Weight: 0.10 lb(s)
Stock quantity: 27

583. 1/4" Compression Plastic Sleeve

Price: 0.25 USD
SKU: 4927
Weight: 0.01 lb(s)
Stock quantity: 40

584. 1/4" Compression Tee

Price: 3.46 USD
SKU: 1229
Weight: 0.10 lb(s)
Stock quantity: 12

585. 1/4" Compression Union

Price: 1.89 USD
SKU: 1226
Weight: 0.10 lb(s)
Stock quantity: 38

586. 1/4" Compression x 1/2" Male IPS Adapter

Price: 2.71 USD
SKU: 1224
Weight: 0.10 lb(s)
Stock quantity: 14

587. 1/4" Compression x 1/2" Male IPS Adapter

Price: 5.88 USD
SKU: 1223
Weight: 0.10 lb(s)
Stock quantity: 1

588. 1/4" Compression x 1/4" Male IPS Adapter

Price: 2.15 USD
SKU: 5049
Weight: 0.10 lb(s)
Stock quantity: 20

589. 1/4" Compression x 1/4" Male IPS Adapter

Price: 1.89 USD
SKU: 4255
Weight: 0.10 lb(s)
Stock quantity: 0

590. 1/4" Compression x 1/4" Male IPS Elbow

Price: 2.85 USD
SKU: 1812
Weight: 0.10 lb(s)
Stock quantity: 15

591. 1/4" Compression x 1/8" Male IPS Adapter

Price: 2.15 USD
SKU: 734
Weight: 0.10 lb(s)
Stock quantity: 8

592. 1/4" Compression x 3/8" Male IPS Adapter

Price: 2.15 USD
SKU: 4426
Weight: 0.10 lb(s)
Stock quantity: 22

593. 1/4" Compression x 3/8" Male IPS Adapter

Price: 4.06 USD
SKU: 1767
Weight: 0.10 lb(s)
Stock quantity: 27

594. 1/4" Convector Steam Air Valve

Model 43 1⁄4″ NPT straight shank Single non-adjustable portFor small steam systemsTelescopic siphon tube with angle cut assures drainageMaximum operating pressure 6 psig (0.4 bar)*Maximum pressure 10 psig (0.7 bar)

Price: 32.28 USD
SKU: 3298
Weight: 0.40 lb(s)
Stock quantity: 2

595. 1/4" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.91 USD
SKU: 2002
Weight: 0.02 lb(s)

596. 1/4" Double Expansion Shield Anchor

Price: 1.00 USD
SKU: 1715
Weight: 0.30 lb(s)
Stock quantity: 160

597. 1/4" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.40 USD
SKU: 2863
Weight: 0.10 lb(s)
Stock quantity: 0

598. 1/4" Galvanized 45° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.76 USD
SKU: 2900
Weight: 0.09 lb(s)
Stock quantity: 0

599. 1/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.04 USD
SKU: 28
Weight: 0.11 lb(s)
Stock quantity: 0

600. 1/4" Galvanized 90° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.42 USD
SKU: 2886
Weight: 0.10 lb(s)
Stock quantity: 0

601. 1/4" Galvanized Cap

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 0.95 USD
SKU: 18
Weight: 0.05 lb(s)
Stock quantity: 0

602. 1/4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.21 USD
SKU: 2998
Weight: 0.09 lb(s)
Stock quantity: 0

603. 1/4" Galvanized Rod Coupling

Material: Carbon steelFinish: Electro-GalvanizedMax. Rec. Load: 240 lbs.

Price: 0.44 USD
SKU: 2298
Weight: 0.06 lb(s)
Stock quantity: 0

604. 1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.37 USD
SKU: 2909
Weight: 0.15 lb(s)
Stock quantity: 0

605. 1/4" Galvanized Union

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.70 USD
SKU: 227
Weight: 0.23 lb(s)
Stock quantity: 0

606. 1/4" Galvanized Washer (Box of 100)

Material: Carbon steel Finish: Electro-galvanized

Price: 0.08 USD
SKU: 4487
Weight: 1.80 lb(s)
Stock quantity: 100

607. 1/4" General Purpose Steel Drill Bit

Constructed of M-2 high speed steel for the best combination of strength, heat resistance, and wear resistanceStandard 118 degree point for use in wood, metal, and plasticOverrall Length: 2-1/2"

Price: 7.90 USD
SKU: 2956
Weight: 0.05 lb(s)
Stock quantity: 23

608. 1/4" Heavy Hex Nut Zinc (Box of 100)

Material: SteelFinish: Zinc

Price: 0.11 USD
SKU: 4891
Weight: 1.00 lb(s)
Stock quantity: 598

609. 1/4" HSS Black & Gold Drill Bit

KFD Killer Force Drill Bits are manufactured from M2 premium grade high speed steelFor use in a wide range of materials in the iron and steel families such aluminum, iron, stainless steel and other hard metal drilling135 degree split point tip for self-centering and reducing thrust. Compared to a conventional 118 degree tip, these drills wont go "walking" on youBlack and gold surface treated for use in stainless steel and other hard metal drilling

Price: 3.70 USD
SKU: 2501
Weight: 0.05 lb(s)
Stock quantity: 6

610. 1/4" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 4.00 USD
SKU: 4561
Weight: 0.31 lb(s)
Stock quantity: 10

611. 1/4" IPS Male x 1/4" Female Ball Valve

Price: 5.92 USD
SKU: 5278
Weight: 0.10 lb(s)
Stock quantity: 12

612. 1/4" Long Steel Pilot Drill

Price: 3.85 USD
SKU: 3516
Weight: 0.05 lb(s)
Stock quantity: 198

613. 1/4" Short Steel Pilot Drill

Price: 3.44 USD
SKU: 1719
Weight: 0.05 lb(s)
Stock quantity: 199

614. 1/4" x 1/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.45 USD
SKU: 4631
Weight: 0.03 lb(s)
Stock quantity: 22

615. 1/4" x 1/8" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.43 USD
SKU: 343
Weight: 0.07 lb(s)
Stock quantity: 12

616. 1/4" x 1/8" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 2.31 USD
SKU: 267
Weight: 0.13 lb(s)
Stock quantity: 2

617. 1/4" x 1/8" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 1.65 USD
SKU: 1183
Weight: 0.13 lb(s)
Stock quantity: 40

618. 1/4" x 1/8" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.62 USD
SKU: 5982
Weight: 0.19 lb(s)
Stock quantity: 5

619. 1/4" x 1/8" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.15 USD
SKU: 2999
Weight: 0.07 lb(s)
Stock quantity: 0

620. 1/4" x 11/2" Galvanized Fender Washer (Box of 100)

Material: Carbon steel Finish: Electro-galvanized

Price: 0.38 USD
SKU: 4135
Weight: 2.40 lb(s)
Stock quantity: 100

621. 1/4" x 1-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.57 USD
SKU: 1548
Weight: 0.05 lb(s)
Stock quantity: 11

622. 1/4" x 1-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.55 USD
SKU: 861
Weight: 0.05 lb(s)
Stock quantity: 37

623. 1/4" x 2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.30 USD
SKU: 1549
Weight: 0.06 lb(s)
Stock quantity: 30

624. 1/4" x 2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.59 USD
SKU: 578
Weight: 0.08 lb(s)
Stock quantity: 11

625. 1/4" x 2-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.26 USD
SKU: 1550
Weight: 0.08 lb(s)
Stock quantity: 6

626. 1/4" x 2-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.66 USD
SKU: 571
Weight: 0.10 lb(s)
Stock quantity: 16

627. 1/4" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.63 USD
SKU: 1551
Weight: 0.10 lb(s)
Stock quantity: 23

628. 1/4" x 3" Carriage Bolt

Price: 0.77 USD
SKU: 1512
Weight: 0.40 lb(s)
Stock quantity: 50

629. 1/4" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.70 USD
SKU: 2660
Weight: 0.13 lb(s)
Stock quantity: 12

630. 1/4" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.79 USD
SKU: 1552
Weight: 0.12 lb(s)
Stock quantity: 25

631. 1/4" x 3-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.82 USD
SKU: 531
Weight: 0.15 lb(s)
Stock quantity: 22

632. 1/4" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.11 USD
SKU: 1553
Weight: 0.14 lb(s)
Stock quantity: 15

633. 1/4" x 4" Carriage Bolt

Price: 1.08 USD
SKU: 1522
Weight: 0.50 lb(s)
Stock quantity: 0

634. 1/4" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.80 USD
SKU: 532
Weight: 0.17 lb(s)
Stock quantity: 8

635. 1/4" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.27 USD
SKU: 1554
Weight: 0.16 lb(s)
Stock quantity: 0

636. 1/4" x 4-1/2" Carriage Bolt

Price: 0.65 USD
SKU: 2694
Weight: 0.60 lb(s)
Stock quantity: 0

637. 1/4" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.21 USD
SKU: 501
Weight: 0.19 lb(s)
Stock quantity: 9

638. 1/4" x 5 SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.21 USD
SKU: 481
Weight: 0.21 lb(s)
Stock quantity: 18

639. 1/4" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.48 USD
SKU: 1555
Weight: 0.18 lb(s)
Stock quantity: 0

640. 1/4" x 50 ft Copper Tubing Type L Coil

Price: 30.18 USD
SKU: 3134
Weight: 4.02 lb(s)
Stock quantity: 5

641. 1/4" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.70 USD
SKU: 1556
Weight: 0.20 lb(s)
Stock quantity: 0

642. 1/4" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.42 USD
SKU: 495
Weight: 0.24 lb(s)
Stock quantity: 24

643. 1/4" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 3.02 USD
SKU: 1557
Weight: 0.21 lb(s)
Stock quantity: 24

644. 1/4" x 6" Carriage Bolt

Price: 0.53 USD
SKU: 4919
Weight: 0.60 lb(s)
Stock quantity: 30

645. 1/4" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.52 USD
SKU: 496
Weight: 0.27 lb(s)
Stock quantity: 20

646. 1/4" x 6" SDS-Plus Carbide Drill Bit

Price: 5.80 USD
SKU: 6338
Weight: 0.10 lb(s)
Stock quantity: 2

647. 1/4" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 0.99 USD
SKU: 1547
Weight: 0.02 lb(s)
Stock quantity: 0

648. 1/4" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.55 USD
SKU: 575
Weight: 0.03 lb(s)
Stock quantity: 15

649. 1/6 HP Cast Iron Circulator Pump (E2 - Series, Model E10.2)

Ultra Quiet DesignCompact Efficiency: highly efficient dry motor design and hydraulics make E Series circulators up to 74% more efficientMotor type: two pole, single phaseMax. Fluid Temperature: 230°F Max. Working Pressure: 150 psi For indoor use

Price: 332.82 USD
SKU: 4971
Weight: 15.10 lb(s)
Stock quantity: 0

650. 1/6 HP Cast Iron Circulator Pump (E2- Series, Model E9.2)

Ultra Quiet DesignCompact Efficiency: Highly efficient dry motor design and hydraulics make E Series circulators up to 74% more efficientMax. Fluid Temperature: 230°F Max. Working Pressure: 150 psi

Price: 299.21 USD
SKU: 4155
Weight: 13.10 lb(s)
Stock quantity: 1

651. 1/6 HP Portable Utility Pump (UT17 Model)

Portable with molded handle and fully submersible design3/4" male outlet connection for use with standard garden hose15 foot power cord with molded 3-prong plugCan pump d to ⅛" from the floor surfaceStrainer prevents entry of solids and debris

Price: 93.50 USD
SKU: 749
Weight: 7.00 lb(s)
Stock quantity: 0

652. 1/8 HP Cartridge Circulator Pump (0010- Series, Model0010-SF3)

Standard high capacity output - Compact design Quiet, efficient operation Direct drive - Low power consumption Unique Replaceable Cartridge design (Field serviceable) Self Lubricating No mechanical seal Unmatched reliability - Maintenance free Universal flange to flange dimensions Cast Iron or Stainless Steel constructionMinimum Fluid Temperature: 40˚F Maximum Fluid Temperature: 230°F Maximum Working Pressure: 125 psi

Price: 271.83 USD

SKU: 955

Weight: 9.00 lb(s)

Stock quantity: 0

653. 1/8 HP Cast Iron Circulator Pump (0012- Series, Model 0012-F4)

Exclusive Anti-Condensate Baffle (ACB) with ambient air flow: protects motor windings against condensate buildupHigh velocity performance compact designQuiet, efficient operationUnique replaceable cartridge design-field serviceableDirect drive-low power consumptionSelf-lubricatingNo mechanical sealUnmatched reliability-maintenance free Universal flange-to-flange dimensionsMinimum Fluid Temperature: 40˚F Maximum Fluid Temperature: 230°F Cast Iron construction

Price: 381.25 USD

SKU: 3538

Weight: 13.00 lb(s)

Stock quantity: 0

654. 1/8 HP Cast Iron Circulator Pump (Series 0010, Model 0010-F3-1IFC)

Replaceable cartridge-field serviceable Unmatched reliability-maintenance freeQuiet, efficient operationDirect drive-low power consumptionSelf lubricating, no mechanical sealStandard high capacity outputCast iron construction, flanged connections Minimum Fluid Temperature: 40˚FMaximum Fluid Temperature: 230˚FMaximum Working Pressure: 125 psi

Price: 284.85 USD
SKU: 4159
Weight: 10.00 lb(s)
Stock quantity: 0

655. 1/8 HP Cast Iron Circulator Pump (Series 009, Model 009-F5)

Standard high capacity output Compact designQuiet, efficient operationUnique replaceable cartridge design-field serviceableDirect drive-low power consumptionSelf-lubricatingNo mechanical sealUnmatched reliability-maintenance freeUniversal flange-to-flange dimensionsCast iron constructionMinimum Fluid Temperature: 40˚F Maximum Fluid Temperature: 230°FMaximum Working Pressure: 125 ps

Price: 257.40 USD

SKU: 5247

Weight: 4.30 lb(s)

Stock quantity: 0

656. 1/8 x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.62 USD
SKU: 477
Weight: 0.16 lb(s)
Stock quantity: 25

657. 1/8" - 1-1/8", 150 Constant Swing Tubing Cutter

Capacity: 1/8" - 1-1/8"

Price: 31.16 USD
SKU: 4570
Weight: 1.00 lb(s)
Stock quantity: 2

658. 1/8" - 2", 202 Wide-Roll Heavy Duty Pipe Cutter

Pipe capacity: 1/8" - 2"

Price: 202.68 USD
SKU: 6579
Weight: 8.00 lb(s)
Stock quantity: 0

659. 1/8" - 5/8", 103 Close Quarters Tubing Cutter

Capacity 1/8' - 5/8"

Price: 13.66 USD
SKU: 4368
Weight: 0.33 lb(s)
Stock quantity: 3

660. 1/8" Auto Air Vent

Price: 8.25 USD
SKU: 4411
Weight: 0.12 lb(s)
Stock quantity: 5

661. 1/8" Black 45° Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.87 USD
SKU: 5260
Weight: 0.07 lb(s)
Stock quantity: 10

662. 1/8" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.54 USD
SKU: 3749
Weight: 0.60 lb(s)
Stock quantity: 10

663. 1/8" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.85 USD
SKU: 21
Weight: 0.06 lb(s)
Stock quantity: 6

664. 1/8" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 1.56 USD
SKU: 4579
Weight: 0.30 lb(s)
Stock quantity: 15

665. 1/8" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.56 USD
SKU: 1408
Weight: 0.06 lb(s)
Stock quantity: 4

666. 1/8" Black Solid Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 0.75 USD
SKU: 396
Weight: 0.02 lb(s)
Stock quantity: 12

667. 1/8" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 1.87 USD
SKU: 141
Weight: 0.10 lb(s)
Stock quantity: 5

668. 1/8" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 6.03 USD
SKU: 264
Weight: 0.17 lb(s)
Stock quantity: 5

669. 1/8" Brass 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.15 USD
SKU: 1162
Weight: 0.17 lb(s)
Stock quantity: 15

670. 1/8" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 1.96 USD
SKU: 1147
Weight: 0.70 lb(s)
Stock quantity: 15

671. 1/8" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 1.84 USD
SKU: 1109
Weight: 0.14 lb(s)
Stock quantity: 5

672. 1/8" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.08 USD
SKU: 1123
Weight: 0.18 lb(s)
Stock quantity: 10

673. 1/8" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 1.43 USD
SKU: 1447
Weight: 0.12 lb(s)
Stock quantity: 19

674. 1/8" Brass Street 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.98 USD
SKU: 5977
Weight: 0.16 lb(s)
Stock quantity: 3

675. 1/8" Brass Union

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.98 USD
SKU: 5971
Weight: 0.27 lb(s)
Stock quantity: 2

676. 1/8" Compression x 1/8" Male IPS Elbow

Price: 1.87 USD
SKU: 2554
Weight: 0.10 lb(s)
Stock quantity: 5

677. 1/8" Convector Steam Air Valve

Model 41Single non-adjustable portFor small steam systemsTelescopic siphon tube with angle cut assures drainageMaximum operating pressure 6 psig (0.4 bar)*Maximum pressure 10 psig (0.7 bar)

Price: 35.00 USD
SKU: 3274
Weight: 0.40 lb(s)
Stock quantity: 2

678. 1/8" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.91 USD
SKU: 6076
Weight: 0.01 lb(s)

679. 1/8" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.57 USD
SKU: 2862
Weight: 0.07 lb(s)
Stock quantity: 0

680. 1/8" Galvanized 45° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.05 USD
SKU: 2899
Weight: 0.05 lb(s)
Stock quantity: 0

681. 1/8" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.10 USD
SKU: 16
Weight: 0.07 lb(s)
Stock quantity: 0

682. 1/8" Galvanized 90° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.49 USD
SKU: 49
Weight: 0.06 lb(s)
Stock quantity: 0

683. 1/8" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.57 USD
SKU: 2908
Weight: 0.10 lb(s)
Stock quantity: 0

684. 1/8" Galvanized Union

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.86 USD
SKU: 198
Weight: 0.17 lb(s)
Stock quantity: 0

685. 1/8" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 3.76 USD
SKU: 4026
Weight: 0.30 lb(s)
Stock quantity: 0

686. 1/8" IPS Male x 1/8" Female Ball Valve

Price: 5.37 USD
SKU: 952
Weight: 0.10 lb(s)
Stock quantity: 19

687. 1/8" Radiator Steam Air Valve

Model 40Float-type vent For ordinary one-pipe system that doesn’t require proportional venting Single non-adjustable port 1⁄8″ NPT angle connection Maximum operating pressure 6 psig (0.4 bar) Maximum pressure 10 psig (0.7 bar)

Price: 24.78 USD
SKU: 3309
Weight: 0.22 lb(s)
Stock quantity: 16

688. 1/8" Straight Radiator Air Valve

Price: 9.79 USD
SKU: 8331
Weight: 0.18 lb(s)
Stock quantity: 0

689. 1/8" Thermostatic Rad Valve w/ Vac Breaker

For one pipe steam systemsDifferential: 6 Bar MaxTest Pressure:16 BarConnection Type:ThreadedTemperature Range: 250°F Max

Price: 59.40 USD
SKU: 8342
Weight: 0.53 lb(s)
Stock quantity: 0

690. 1/8" x 1-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 0.97 USD
SKU: 1525
Weight: 0.03 lb(s)
Stock quantity: 30

691. 1/8" x 1-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.51 USD
SKU: 624
Weight: 0.04 lb(s)
Stock quantity: 17

692. 1/8" x 2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.21 USD
SKU: 1526
Weight: 0.04 lb(s)
Stock quantity: 21

693. 1/8" x 2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.55 USD
SKU: 576
Weight: 0.05 lb(s)
Stock quantity: 4

694. 1/8" x 2-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.17 USD
SKU: 1527
Weight: 0.05 lb(s)
Stock quantity: 0

695. 1/8" x 2-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.64 USD
SKU: 582
Weight: 0.07 lb(s)
Stock quantity: 21

696. 1/8" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.26 USD
SKU: 1528
Weight: 0.06 lb(s)
Stock quantity: 0

697. 1/8" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.64 USD
SKU: 583
Weight: 0.08 lb(s)
Stock quantity: 22

698. 1/8" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.36 USD
SKU: 1529
Weight: 0.07 lb(s)
Stock quantity: 1

699. 1/8" x 3-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.78 USD
SKU: 526
Weight: 0.09 lb(s)
Stock quantity: 0

700. 1/8" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.52 USD
SKU: 1530
Weight: 0.08 lb(s)
Stock quantity: 0

701. 1/8" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.78 USD
SKU: 546
Weight: 0.10 lb(s)
Stock quantity: 23

702. 1/8" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.05 USD
SKU: 1531
Weight: 0.09 lb(s)
Stock quantity: 25

703. 1/8" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.46 USD
SKU: 491
Weight: 0.11 lb(s)
Stock quantity: 25

704. 1/8" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.87 USD
SKU: 1532
Weight: 0.10 lb(s)
Stock quantity: 0

705. 1/8" x 5" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.46 USD
SKU: 492
Weight: 0.12 lb(s)
Stock quantity: 25

706. 1/8" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.40 USD
SKU: 1533
Weight: 0.11 lb(s)
Stock quantity: 25

707. 1/8" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.62 USD
SKU: 457
Weight: 0.14 lb(s)
Stock quantity: 25

708. 1/8" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.56 USD
SKU: 1534
Weight: 0.12 lb(s)
Stock quantity: 25

709. 1/8" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 0.85 USD
SKU: 1524
Weight: 0.01 lb(s)
Stock quantity: 25

710. 1/8" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.59 USD
SKU: 589
Weight: 0.02 lb(s)
Stock quantity: 25

711. 1/8", #4 Angle Air Valve

Self-Adjusting Thermostatic ControlFloat to Prevent Water EscapeReduces Radiator NoiseCuts Fuel ConsumptionAssures Even Heat DistributionLowers Operating Costs

Price: 10.42 USD
SKU: 4586
Weight: 0.26 lb(s)
Stock quantity: 15

712. 1/8", #5 Angle Air Valve

Self-Adjusting Thermostatic ControlFloat to Prevent Water EscapeReduces Radiator NoiseCuts Fuel ConsumptionAssures Even Heat DistributionLowers Operating Costs

Price: 10.17 USD
SKU: 4861
Weight: 0.26 lb(s)
Stock quantity: 1

713. 1/8", #6 Angle Air Valve

Self-Adjusting Thermostatic ControlFloat to Prevent Water EscapeReduces Radiator NoiseCuts Fuel ConsumptionAssures Even Heat DistributionLowers Operating Costs

Price: 10.17 USD
SKU: 4868
Weight: 0.26 lb(s)
Stock quantity: 5

714. 1/8", #C Angle Air Valve

Self-Adjusting Thermostatic ControlFloat to Prevent Water EscapeReduces Radiator NoiseCuts Fuel ConsumptionAssures Even Heat DistributionLowers Operating Costs

Price: 10.42 USD
SKU: 4617
Weight: 0.26 lb(s)
Stock quantity: 1

715. 1/8", #D Angle Air Valve

Self-Adjusting Thermostatic ControlFloat to Prevent Water EscapeReduces Radiator NoiseCuts Fuel ConsumptionAssures Even Heat DistributionLowers Operating Costs

Price: 10.17 USD
SKU: 4625
Weight: 0.26 lb(s)
Stock quantity: 2

716. 10 gal DuraPower Commercial Electric Water Heater

Zinc plated copper sheaths for longer life. Medium watt density means lower surface temperature to minimize scale build-up and more surface to heat water. Element sizes from 1.5 to 6 KW.Temperature control (adjustable through a range of 130° to 170°F on single element and 120° to 181°F on dual element) and manual reset high temperature cutoff per element Model: DEL-10S

Price: 568.75 USD

SKU: 4623

Weight: 54.00 lb(s)

Stock quantity: 0

717. 10" Flexible Pipe Cap

Rated for underground Flexes with ground movement Flexible Connectors are leak-proof, rot-proof and sealed against infiltration and exfiltrationConforms to CSA B602, certified and UPC approved

Price: 72.36 USD
SKU: 4615
Weight: 2.10 lb(s)
Stock quantity: 0

718. 10" Galvanized Clevis Hanger

Pipe Size: 10"Max. Rec. Load: 3600 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 24.57 USD
SKU: 4921
Weight: 8.22 lb(s)
Stock quantity: 15

719. 10" Husky Coupling (4000 Series)

Extra width for lateral supportAdditional sealing clamps for better load distribution and a more positive seal304 stainless steel heavy duty construction. Shield color coated orangeMeets ASTM C-1540 standard specification for Heavy Duty shielded couplings

Price: 72.63 USD
SKU: 5255
Weight: 2.75 lb(s)
Stock quantity: 0

720. 10" No Hub Cast Iron Blind Cap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 60.71 USD
SKU: 7930
Weight: 14.70 lb(s)
Stock quantity: 4

721. 10" No Hub Cast Iron Short Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 198.00 USD
SKU: 7880
Weight: 53.40 lb(s)
Stock quantity: 0

722. 10" PVC DWV 90° Elbow

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.00 USD
SKU:

723. 10" x 10" No Hub Cast Iron Pipe

Cast-iron construction 212° F maximum working temperature For non-pressure applications Noncombustible and offers superior sound-deadening performance Conform to ASTM A 888 and CISPI Standard 301

Price: 397.92 USD
SKU: 7923
Weight: 254.60 lb(s)
Stock quantity: 0

724. 10" x 12" Heavy-Duty Citrus Scrubbing Towels (75 pack)

#77095Fresh citrus scent10" x 12" dual-textured towelsNon-rinsing - Quick dryingPre-Moistened - No water requiredProven way to clean your hands away from the sinkDual-textured towels lock in dirt - will not transfer soil back to hands Leaves your hands clean, no rinsing necessary Tough, durable dispenser bucket - light and portable Secure dispenser lid prevents towels from drying out

Price: 17.35 USD
SKU: 8849
Weight: 3.00 lb(s)
Stock quantity: 0

725. 10" x 24' Flue Pipe

Price: 7.65 USD
SKU: 3606
Stock quantity: 0

726. 10.1 oz. 40 YR . Alex Plus All Puppose Caulk Plus Silicone (Clear)

Highly flexible and durable for a waterproof seal.Excellent adhesion.Cured caulk is mold and mildew resistant.Easy to apply and tool.Paintable.Easy water clean-up. Indoor/outdoor use.Exceeds ASTM Specification C834.

Price: 4.42 USD
SKU: 5058
Weight: 0.80 lb(s)
Stock quantity: 11

727. 10.1 oz. Silicone Tub & Tile Waterproof Sealant (Clear)

Permanently waterproofShrink & crack-proofResists mold & mildewNon-paintableTypical uses: showers, tubs, sinks, tile, countertops and fixturesAdheres to: most ceramic tile, laminate, porcelain, glass, metal, plastic, granite and wood

Price: 5.52 USD
SKU: 5283
Weight: 0.80 lb(s)
Stock quantity: 72

728. 10.1 oz. Silicone Tub & Tile Waterproof Sealant (White)

Permanently waterproofShrink & crack-proofResists mold & mildewNon-paintableTypical uses: showers, tubs, sinks, tile, countertops and fixturesAdheres to: most ceramic tile, laminate, porcelain, glass, metal, plastic, granite and wood

Price: 5.40 USD
SKU: 4538
Weight: 0.80 lb(s)
Stock quantity: 40

729. 10.3 oz. Metacaulk MC 150+ Firestop Sealant (Red)

Fire rated sealant and smoke seal for construction joints and through-penetrations on both horizontal and vertical surfaces. Water-based, non-sag caulking grade sealant that is easy to apply as well as to retrofit. Cures to a paintable flexible seal. Prevents the spread of flames, smoke, hot gases and water through joint openings and through-penetrations. Can be used in areas under constant vibration or movement. Excellent freeze/thaw. Recommended for metal, fiberglass and plastic pipes, wall construction joints, power and telephone cables. Tested to ASTM G21 mold inhibitor. Sound Transmission Class (STC) rating 65. (ASTM E90) VOC compliant. 3 year shelf life. Meets ASTM E814, Standard Test Method for fire tests of Penetration Firestop Systems

Price: 8.40 USD

SKU: 1891

Weight: 0.80 lb(s)

Stock quantity: 58

730. 10.5 oz. Neutral Silicone Sealant (Clear)

Neutral curing, almost odourlessPerfect adhesion without primer to most substratesUV, water and weather resistantNon corrosive towards metalsMould resistant

Price: 6.29 USD
SKU: 7544
Weight: 0.80 lb(s)
Stock quantity: 37

731. 10.5 oz. Neutral Silicone Sealant (White)

Neutral curing, almost odourless Perfect adhesion without primer to most substratesUV, water and weather resistantNon corrosive towards metalsMould resistant

Price: 6.29 USD
SKU: 7545
Weight: 0.80 lb(s)
Stock quantity: 11

732. 100 psi Pressure Gauge

Price: 5.20 USD
SKU: 3887
Weight: 0.24 lb(s)
Stock quantity: 13

733. 100,000 BTU Mascot FT Wall Mounted Heating Only Boiler

Model MFTHW100NA1XNNatural Gas & Propane Models95% Efficient (AFUE)Up to 10:1 ModulationVent up to 100 ft in PVC, CPVC & PolypropyleneEnvironmentally FriendlyLow NOx EmissionsIntegrated DHW Indirect TankSuperior DHW Performance on Combi Models

Price: 2025.00 USD

SKU: 8698

Weight: 98.00 lb(s)

Stock quantity: 0

734. 11 oz. Rust-Oleum Metallic Spray Paint

Weather and corrosion resistant coating protects exterior/interior surfaces like wood, metal, concrete, masonry and morOil-based formula provides a durable protective coating with excellent rust preventionDries to touch in 2 to 4 hours and covers up to 15 sq ftExcellent resistance to abrasion, fading and chipping

Price: 8.48 USD
SKU: 8458
Weight: 0.84 lb(s)
Stock quantity: 12

735. 1-1/2 x 12", 22 GA Crome Plated Slip Joint Extension Tube

S/J connectWith nuts & washersFinish: Crome plated

Price: 8.23 USD
SKU: 2647
Weight: 0.38 lb(s)
Stock quantity: 43

736. 1-1/2 PVC DWV Fitting Adapter (SPIGOT x MIP)

Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.04 USD
SKU: 848
Weight: 0.10 lb(s)
Stock quantity: 0

737. 1-1/2 x 1" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.10 USD
SKU: 3027
Weight: 0.80 lb(s)
Stock quantity: 1

738. 1-1/2" Neo-Mold Tailpiece Washer

Price: 0.94 USD
SKU: 5377
Weight: 0.01 lb(s)
Stock quantity: 174

739. 1-1/2" 3-Way Tee w/ Nut & Washer (Rough Brass)

Price: 7.61 USD
SKU: 4210
Weight: 0.90 lb(s)
Stock quantity: 6

740. 1-1/2" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 10.06 USD
SKU: 2664
Weight: 0.20 lb(s)
Stock quantity: -3

741. 1-1/2" Black 45° Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.93 USD
SKU: 45
Weight: 1.08 lb(s)
Stock quantity: 16

742. 1-1/2" Black 45° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.61 USD
SKU: 102
Weight: 1.00 lb(s)
Stock quantity: 20

743. 1-1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.73 USD
SKU: 20
Weight: 1.20 lb(s)
Stock quantity: 55

744. 1-1/2" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.29 USD
SKU: 3008
Weight: 1.19 lb(s)
Stock quantity: 26

745. 1-1/2" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 3.08 USD
SKU: 411
Weight: 0.59 lb(s)
Stock quantity: 42

746. 1-1/2" Black Cast Iron Steam 45° Elbow (Domestic)

Price: 11.28 USD
SKU: 6582
Weight: 0.92 lb(s)
Stock quantity: 40

747. 1-1/2" Black Cast Iron Steam 45° Elbow (Imported)

Price: 7.54 USD
SKU: 1228
Weight: 2.50 lb(s)
Stock quantity: 26

748. 1-1/2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 6.33 USD
SKU: 1279
Weight: 2.54 lb(s)
Stock quantity: 50

749. 1-1/2" Black Cast Iron Steam Tee

Price: 9.89 USD
SKU: 3096
Weight: 2.54 lb(s)
Stock quantity: 113

750. 1-1/2" Black Cast Iron Steam Tee (Domestic)

Price: 9.45 USD
SKU: 6438
Weight: 2.54 lb(s)
Stock quantity: 174

751. 1-1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 4.40 USD
SKU: 175
Weight: 0.91 lb(s)
Stock quantity: 95

752. 1-1/2" Black Cross Tee

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 11.86 USD
SKU: 142
Weight: 2.01 lb(s)
Stock quantity: 2

753. 1-1/2" Black Extension

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 8.36 USD
SKU: 2752
Weight: 0.65 lb(s)
Stock quantity: 5

754. 1-1/2" Black Floor Flange

Floor flange is used to secure pipe to wall or floor mounts for DIY (do-it-yourself) applicationsMeets in ASTM and ANSI standards

Price: 5.17 USD
SKU: 3745
Weight: 1.18 lb(s)
Stock quantity: 15

755. 1-1/2" Black Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 2.20 USD
SKU: 408
Weight: 0.44 lb(s)
Stock quantity: 74

756. 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 5.70 USD
SKU: 138
Weight: 1.64 lb(s)
Stock quantity: 36

757. 1-1/2" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 11.47 USD
SKU: 225
Weight: 1.69 lb(s)
Stock quantity: 53

758. 1-1/2" Brass 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 13.63 USD
SKU: 1169
Weight: 1.20 lb(s)
Stock quantity: 15

759. 1-1/2" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 16.26 USD
SKU: 1154
Weight: 0.30 lb(s)

760. 1-1/2" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 9.56 USD
SKU: 1116
Weight: 0.61 lb(s)
Stock quantity: 14

761. 1-1/2" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 12.67 USD
SKU: 1130
Weight: 1.03 lb(s)
Stock quantity: 8

762. 1-1/2" Brass Flange with Isolating Ball Valve

Price: 35.26 USD
SKU: 6474
Weight: 2.58 lb(s)
Stock quantity: 10

763. 1-1/2" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.81 USD
SKU: 1414
Weight: 0.54 lb(s)
Stock quantity: 8

764. 1-1/2" Brass Street 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 17.31 USD
SKU: 1429
Weight: 1.30 lb(s)
Stock quantity: 2

765. 1-1/2" Brass Street 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 17.85 USD
SKU: 1442
Weight: 1.20 lb(s)
Stock quantity: 2

766. 1-1/2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 22.38 USD
SKU: 1466
Weight: 1.77 lb(s)
Stock quantity: 1

767. 1-1/2" Brass Union

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 31.89 USD
SKU: 1480
Weight: 1.80 lb(s)
Stock quantity: 4

768. 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.57 USD
SKU: 2033
Weight: 0.70 lb(s)
Stock quantity: 10

769. 1-1/2" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 45.54 USD
SKU: 4106
Weight: 1.08 lb(s)

770. 1-1/2" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 19.57 USD
SKU: 8624
Weight: 0.32 lb(s)
Stock quantity: 16

771. 1-1/2" Copper x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 6.53 USD
SKU: 4650
Weight: 0.60 lb(s)
Stock quantity: -41

772. 1-1/2" Copper 45° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.70 USD
SKU: 1991
Weight: 0.33 lb(s)

773. 1-1/2" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.82 USD
SKU: 2008
Weight: 0.39 lb(s)

774. 1-1/2" Copper Caps

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.29 USD
SKU: 1870
Weight: 0.17 lb(s)

775. 1-1/2" Copper Coupling (Socket) w/Tube Stop

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.64 USD
SKU: 1915
Weight: 0.23 lb(s)
Stock quantity: 50

776. 1-1/2" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 0.81 USD
SKU: 1671
Weight: 0.17 lb(s)
Stock quantity: 42

777. 1-1/2" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69.

Price: 3.12 USD
SKU: 1655
Weight: 0.70 lb(s)
Stock quantity: 162

778. 1-1/2" Copper Epoxy Coated Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 1.10 USD
SKU: 1654
Weight: 0.20 lb(s)
Stock quantity: 75

779. 1-1/2" Copper Epoxy Coated Strut Clamp

Price: 1.47 USD
SKU: 1898
Weight: 0.17 lb(s)
Stock quantity: 93

780. 1-1/2" Copper Slip Coupling (Socket)

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.28 USD
SKU: 1955
Weight: 0.22 lb(s)
Stock quantity: 31

781. 1-1/2" Copper Two Hole Strap

Price: 0.33 USD
SKU: 1473
Weight: 0.10 lb(s)
Stock quantity: 234

782. 1-1/2" Copper x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 5.74 USD
SKU: 2646
Weight: 0.60 lb(s)
Stock quantity: 98

783. 1-1/2" Copper x 1-1/2" Cast Copper Union

Price: 28.06 USD
SKU: 1830
Weight: 0.92 lb(s)
Stock quantity: 21

784. 1-1/2" Copper x 1-1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 11.58 USD
SKU: 4364
Weight: 0.60 lb(s)
Stock quantity: 0

785. 1-1/2" Copper x 3/8" Wall Thickness 6 ft. Length Thermacell Insulation

Price: 4.29 USD
SKU: 3906
Weight: 0.07 lb(s)
Stock quantity: 35

786. 1-1/2" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 8.74 USD
SKU: 2138
Weight: 0.45 lb(s)

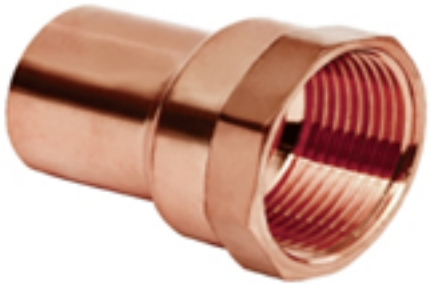

787. 1-1/2" Die Cast Slip Joint Nut

Finish: Crome Plated

Price: 0.61 USD
SKU: 2441
Weight: 0.10 lb(s)
Stock quantity: 46

788. 1-1/2" Double Check Valve

Lead FreeMaximum working pressure 175 psiTemperature range 32°F to 140°FTwo independent check valves provide fail-safe operation preventing contaminated water from entering the potable water supply.

Price: 247.73 USD
SKU: 1336

789. 1-1/2" EJECTOR Check Valve

lapper bends over a radius, no sharp 90° edges—lengthens life of flapper hingePVC plastic check body, ultrasonically-welded and can be solvent-welded for rigid pressure rated piping systems to 25 PSI - (57' [17 m] of head) at 130 °F (54 °C). (30-0182)Vertical or horizontal installationAvailable in individual packages for pegboard display (30-0191)All stainless steel screws, nuts and clamps on model 30-0200 onlySlip x slip for 4.3 PSI (10' [3 m] of head) at 130 °F (54 °C). Avoid more than 10' (3 m) static head above the check valveDesigned to reduce water hammer10 per carton

Price: 11.90 USD

SKU: 3907

Weight: 1.00 lb(s)

790. 1-1/2" FIP x 1-1/2" MIP Washing Machine Tee

Price: 8.92 USD
SKU: 6470
Weight: 0.50 lb(s)
Stock quantity: 60

791. 1-1/2" FIP x 1-1/2" SJ Washing Machine Tee

Price: 8.20 USD
SKU: 3350
Weight: 0.50 lb(s)
Stock quantity: 16

792. 1-1/2" Fitting Brush w/ Wire Handle

Price: 3.47 USD
SKU: 1484
Weight: 0.67 lb(s)
Stock quantity: 37

793. 1-1/2" Flexible Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 2.43 USD
SKU: 2632
Weight: 0.32 lb(s)
Stock quantity: 8

794. 1-1/2" Flexible Pipe Cap

Rated for underground Flexes with ground movement Flexible Connectors are leak-proof, rot-proof and sealed against infiltration and exfiltrationConforms to CSA B602, certified and UPC approved

Price: 1.57 USD
SKU: 2633
Weight: 0.12 lb(s)
Stock quantity: 75

795. 1-1/2" Float and Thermostatic Steam Trap

Price: 175.50 USD
SKU: 3454
Weight: 24.20 lb(s)
Stock quantity: 0

796. 1-1/2" Flow Check Control Valve

Open automatically when the circulator starts running.Maximum operating pressure 125 PSIMaximum operating temperature 277° F

Price: 101.60 USD
SKU: 1770
Weight: 7.80 lb(s)

797. 1-1/2" FTG x Copper 45° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.94 USD
SKU: 2000
Weight: 0.34 lb(s)

798. 1-1/2" FTG x Copper 90° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 6.11 USD
SKU: 2024
Weight: 0.38 lb(s)

799. 1-1/2" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.71 USD
SKU: 2869
Weight: 1.08 lb(s)
Stock quantity: 8

800. 1-1/2" Galvanized 45° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 7.19 USD
SKU: 2906
Weight: 0.99 lb(s)
Stock quantity: 8

801. 1-1/2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.00 USD
SKU: 2845
Weight: 1.22 lb(s)
Stock quantity: 22

802. 1-1/2" Galvanized 90° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.64 USD
SKU: 437
Weight: 1.19 lb(s)
Stock quantity: 14

803. 1-1/2" Galvanized Cap

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.69 USD
SKU: 2878
Weight: 0.59 lb(s)
Stock quantity: 3

804. 1-1/2" Galvanized Clevis Hanger

Pipe Size: 1-1/2"Max. Rec. Load: 730 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 1.11 USD

SKU: 8531

Weight: 0.40 lb(s)

Stock quantity: 74

805. 1-1/2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.36 USD
SKU: 3023
Weight: 0.91 lb(s)
Stock quantity: 35

806. 1-1/2" Galvanized Riser Clamp

This product is not intended for use with hanger rods. Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 2.76 USD

SKU: 8516

Weight: 1.17 lb(s)

Stock quantity: 321

807. 1-1/2" Galvanized Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 1.57 USD
SKU: 1159
Weight: 0.38 lb(s)
Stock quantity: 50

808. 1-1/2" Galvanized Strut Clamp

Price: 0.94 USD
SKU: 1437
Weight: 0.30 lb(s)
Stock quantity: 70

809. 1-1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.86 USD
SKU: 58
Weight: 1.65 lb(s)
Stock quantity: 4

810. 1-1/2" Galvanized Two Hole Strap

Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.May be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4” X 1” tek type screwsApprovals: Underwriters Laboratories listed for US and Canada.

Price: 0.40 USD
SKU: 1698
Weight: 0.10 lb(s)
Stock quantity: 64

811. 1-1/2" Galvanized Union

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 12.22 USD
SKU: 3169
Weight: 1.69 lb(s)
Stock quantity: 5

812. 1-1/2" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 5.72 USD
SKU: 154
Weight: 1.70 lb(s)
Stock quantity: 11

813. 1-1/2" Heavy-Duty, Professional Brush

Price: 7.05 USD
SKU: 8847
Weight: 0.30 lb(s)
Stock quantity: 0

814. 1-1/2" Husky Coupling (4000 Series)

Extra width for lateral supportAdditional sealing clamps for better load distribution and a more positive seal304 stainless steel heavy duty construction. Shield color coated orangeMeets ASTM C-1540 standard specification for Heavy Duty shielded couplings

Price: 7.56 USD
SKU: 8431
Weight: 0.53 lb(s)
Stock quantity: 21

815. 1-1/2" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 19.52 USD
SKU: 3030
Weight: 1.87 lb(s)
Stock quantity: 17

816. 1-1/2" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 22.45 USD
SKU: 7669
Weight: 1.87 lb(s)
Stock quantity: 25

817. 1-1/2" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 40.50 USD
SKU: 3059
Weight: 1.87 lb(s)
Stock quantity: 10

818. 1-1/2" IPS Chrome Plated Shallow Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.70 USD
SKU: 1815
Weight: 0.03 lb(s)
Stock quantity: 23

819. 1-1/2" IPS Chrome Plated Split Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.96 USD
SKU: 4818
Weight: 0.03 lb(s)
Stock quantity: 29

820. 1-1/2" IPS Chrome-Plated Steel Box Escutcheon

Chrome Plated FinishMade of Steel

Price: 1.69 USD
SKU: 670
Weight: 0.03 lb(s)
Stock quantity: 26

821. 1-1/2" IPS Gate Valve

Pressure rating 200 psi wogTemperaure rating is 180°FCast brass constructionConforms to NSF / ANSI 372, AB 1953

Price: 38.05 USD
SKU: 2663
Weight: 2.10 lb(s)
Stock quantity: 10

822. 1-1/2" IPS OS&Y Valve

Price: 130.50 USD
SKU: 1774
Weight: 50.00 lb(s)
Stock quantity: 2

823. 1-1/2" IPS Plastic Escutcheon

Chrome Plated FinishMade of Plastic

Price: 2.26 USD
SKU: 4523
Weight: 0.03 lb(s)
Stock quantity: 27

824. 1-1/2" IPS Spirovent w/Removable Vent Head

Price: 165.00 USD
SKU: 3366
Weight: 2.78 lb(s)
Stock quantity: 3

825. 1-1/2" IPS Spring Loaded Check Valve

Lead FreeMaximum working pressure 200 psiCast Brass spring check valveStainless steel spring

Price: 35.65 USD
SKU: 4668
Weight: 1.52 lb(s)

826. 1-1/2" IPS Swing Check Valve

Lead FreeCast Brass swing check valve125 WSP, 200 WOGApproved By UPC, NSF

Price: 22.18 USD
SKU: 2741
Weight: 1.70 lb(s)

827. 1-1/2" IPS x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 6.94 USD
SKU: 2546
Weight: 0.60 lb(s)
Stock quantity: 0

828. 1-1/2" IPS x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 6.07 USD
SKU: 2944
Weight: 0.60 lb(s)
Stock quantity: -4

829. 1-1/2" Low Seal Bath Brass P-Trap

IPS ConnectionWorking temperature range of 0° to 120°FRough brass finish

Price: 14.54 USD
SKU: 1783
Weight: 1.50 lb(s)
Stock quantity: 3

830. 1-1/2" Neo-Mold Slip Join Washer

Price: 0.94 USD
SKU: 5368
Weight: 0.01 lb(s)
Stock quantity: 375

831. 1-1/2" No Hub Cast Iron 1/16 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 5.70 USD
SKU: 7502
Weight: 1.22 lb(s)
Stock quantity: 10

832. 1-1/2" No Hub Cast Iron 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 3.51 USD
SKU: 7503
Weight: 1.70 lb(s)
Stock quantity: 21

833. 1-1/2" No Hub Cast Iron 1/8 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 2.66 USD
SKU: 7504
Weight: 1.50 lb(s)
Stock quantity: 21

834. 1-1/2" No Hub Cast Iron Blind Cap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 3.22 USD
SKU: 7505
Weight: 0.60 lb(s)
Stock quantity: 12

835. 1-1/2" No Hub Cast Iron Long Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 16.50 USD
SKU: 7590
Weight: 4.40 lb(s)
Stock quantity: 0

836. 1-1/2" No Hub Cast Iron P-Trap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 8.80 USD
SKU: 7506
Weight: 3.40 lb(s)
Stock quantity: 12

837. 1-1/2" No Hub Cast Iron Sanitary Tap Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 12.01 USD
SKU: 7591
Weight: 2.30 lb(s)
Stock quantity: 0

838. 1-1/2" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 4.93 USD
SKU: 7507
Weight: 2.90 lb(s)
Stock quantity: 12

839. 1-1/2" No Hub Cast Iron Tap 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 8.79 USD
SKU: 7592
Weight: 1.50 lb(s)
Stock quantity: 0

840. 1-1/2" No Hub Cast Iron Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 9.21 USD
SKU: 7508
Weight: 2.52 lb(s)
Stock quantity: 10

841. 1-1/2" No Hub Heavy Duty Coupling

Standard couplings shall conform to the requirements contained in the latest edition of ASTM C1540Shield assembly, clamp, band, and screw housing shall be made from series 301 stainless steel, and the screw made from series 304 stainless steelGaskets shall comply with requirements contained in the latest edition of ASTM C564

Price: 6.30 USD
SKU: 6319
Weight: 0.30 lb(s)
Stock quantity: 75

842. 1-1/2" No-Hub Coupling

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certified Couplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310 Neoprene rubber gasket meets/exceeds ASTM C 564 Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 2.08 USD
SKU: 5872
Weight: 0.27 lb(s)
Stock quantity: 106

843. 1-1/2" OD Chrome Plated Steel Box Escutcheon

Chrome Plated FinishMade of Steel

Price: 2.13 USD
SKU: 4800
Weight: 0.03 lb(s)
Stock quantity: 4

844. 1-1/2" Plastic Two Hole Strap

Price: 1.47 USD
SKU: 3317
Weight: 0.01 lb(s)
Stock quantity: 56

845. 1-1/2" PVC Check Valve

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 20.00 USD
SKU: 3623
Weight: 0.85 lb(s)

846. 1-1/2" PVC DWV 45° Elbow (HUB x HUB)

Sometimes called a "Street Eighth Bend".Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.85 USD
SKU: 987
Weight: 0.23 lb(s)
Stock quantity: 23

847. 1-1/2" PVC DWV 45° Street Elbow (HUB x SPIGOT)

Sometimes called a "Street Eighth Bend".Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.91 USD
SKU: 837
Weight: 0.20 lb(s)
Stock quantity: 38

848. 1-1/2" PVC DWV 90° Elbow

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.88 USD
SKU: 706
Weight: 0.33 lb(s)
Stock quantity: 59

849. 1-1/2" PVC DWV 90° Street Elbow (HUB x SPIGOT)

Sometimes called a "Street Quarter Bend". Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.99 USD
SKU: 979
Weight: 0.22 lb(s)
Stock quantity: 49

850. 1-1/2" PVC DWV Adjustable P-Trap w/Union

Maximum service temperature 140°FMaximum working pressure of 5 psiDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 3.42 USD
SKU: 1241
Weight: 0.65 lb(s)
Stock quantity: 7

851. 1-1/2" PVC DWV Cap (HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.47 USD
SKU: 814
Weight: 0.09 lb(s)
Stock quantity: 19

852. 1-1/2" PVC DWV Coupling

Maximum service temperature 140°FDo not test or use with compressed air or other gasesHub x hub connectionsASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.43 USD
SKU: 968
Weight: 0.10 lb(s)
Stock quantity: 51

853. 1-1/2" PVC DWV Double Sanitary Tee (ALL HUB)

Price: 3.51 USD
SKU: 5873
Weight: 0.40 lb(s)
Stock quantity: 4

854. 1-1/2" PVC DWV Female Adapter (HUB x FIP)

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.79 USD
SKU: 818
Weight: 0.12 lb(s)
Stock quantity: 13

855. 1-1/2" PVC DWV Fitting Adapter (SPIGOT x FIP)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.21 USD
SKU: 851
Weight: 0.16 lb(s)
Stock quantity: 10

856. 1-1/2" PVC DWV Fitting Trap Adapter (SPIGOT x SLIP JAMNUT)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.21 USD
SKU: 276
Weight: 0.13 lb(s)
Stock quantity: 35

857. 1-1/2" PVC DWV Male Adapter

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedSize range 1¼" to 4"

Price: 0.84 USD
SKU: 951
Weight: 0.90 lb(s)
Stock quantity: 24

858. 1-1/2" PVC DWV P-Trap

Maximum service temperature 140°FMaximum working pressure of 5 psiDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 2.70 USD
SKU: 1234
Weight: 0.55 lb(s)
Stock quantity: 20

859. 1-1/2" PVC DWV Sanitary Tee (HUB x HUB x HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.36 USD
SKU: 899
Weight: 0.35 lb(s)
Stock quantity: 7

860. 1-1/2" PVC DWV Trap Adapter (HUB x SLIP JAMNUT)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.21 USD
SKU: 799
Weight: 0.12 lb(s)
Stock quantity: 18

861. 1-1/2" PVC DWV Wye (HUB x HUB xHUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness

Price: 2.25 USD
SKU: 997
Weight: 0.44 lb(s)
Stock quantity: 67

862. 1-1/2" SCH 40 PVC Ball Valve

Pressure rating is 150 psi at 73°FConnection Type: SolventProvides great strength and resistance to corrosion and chemicalsCompact and lightweight design

Price: 9.97 USD
SKU: 1283
Weight: 1.00 lb(s)
Stock quantity: 0

863. 1-1/2" Shielded Transition Coupling (Tubular to Cast Iron, PVC, Steel)

Corrosion-resistant 300 Series stainless steel componentMaximum working pressure of 4.3 psi Neoprene rubber sleeve conforms to ASTM C 564Certified to ASTM C-1460, CSA B602

Price: 5.50 USD
SKU: 4188
Weight: 0.32 lb(s)
Stock quantity: 15

864. 1-1/2" Slip Cap

Fininsh: Crome Plated

Price: 3.27 USD
SKU: 1569
Weight: 0.10 lb(s)
Stock quantity: 6

865. 1-1/2" Solid Brass Slip Joint Nut

Finish: Rough Brass

Price: 1.83 USD
SKU: 5753
Weight: 0.10 lb(s)
Stock quantity: 0

866. 1-1/2" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 300 lbs.Pipe Size: 1-1/2"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69

Price: 0.50 USD

SKU: 1514

Weight: 0.11 lb(s)

Stock quantity: 200

867. 1-1/2" Standard Grooved 90° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 7.74 USD
SKU: 4651
Weight: 1.30 lb(s)
Stock quantity: 10

868. 1-1/2" Standard Length Spade Bit

Blue-Groove point and cutting edge for faster chip removal - 4x faster than standard spade bitsDouble cutting spurs scribe the outside of the hole reducing breakout10% larger shank for added durabilityGrooved hex shank prevents slipping in drill chuck or bit extensionFits all standard quick change chucks

Price: 8.99 USD
SKU: 5019
Weight: 0.50 lb(s)
Stock quantity: 6

869. 1-1/2" Steam Angle Radiator Valve

Price: 26.24 USD
SKU: 2690
Weight: 2.40 lb(s)
Stock quantity: 5

870. 1-1/2" Steam Straight Radiator Valve

Price: 38.31 USD
SKU: 3201
Weight: 2.80 lb(s)
Stock quantity: 12

871. 1-1/2" Suspension Clamp

Price: 1.45 USD
SKU: 3316
Weight: 0.03 lb(s)
Stock quantity: 62

872. 1-1/2" Sweat Ball Valve

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 19.02 USD
SKU: 2372
Weight: 2.28 lb(s)
Stock quantity: 18

873. 1-1/2" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 22.08 USD
SKU: 7662
Weight: 2.28 lb(s)
Stock quantity: 3

874. 1-1/2" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 40.50 USD
SKU: 699
Weight: 2.28 lb(s)
Stock quantity: 18

875. 1-1/2" Sweat Brass Flange with Isolating Ball Valve

Price: 48.97 USD
SKU: 6479
Weight: 2.40 lb(s)
Stock quantity: 8

876. 1-1/2" Sweat Check Valve

For installing on copper pipe using standard copper soldering methodArrow on the valve body shows direction of the flowSuitable for upright horizontal and vertical (arrow pointing upward) installations in plumbing and heating systems Pressure Ratings: 200 psi Non-Shock WOGConstruction: Lead-Free Brass Body

Price: 19.76 USD
SKU: 2265
Weight: 1.62 lb(s)

877. 1-1/2" Sweat Gate Valve

Price: 32.19 USD
SKU: 2856
Weight: 2.10 lb(s)
Stock quantity: 15

878. 1-1/2" Sweat Spirovent w/Removable Vent Head

Price: 169.50 USD
SKU: 6377
Weight: 2.78 lb(s)
Stock quantity: 3

879. 1-1/2" Test Plug

Large wing nut for easy operationGalvanized steel flange with molded rubber gasket

Price: 1.94 USD
SKU: 3145
Weight: 0.16 lb(s)
Stock quantity: 34

880. 1-1/2" x 1" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.56 USD
SKU: 98
Weight: 0.95 lb(s)
Stock quantity: 4

881. 1-1/2" x 1" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.53 USD
SKU: 404
Weight: 0.44 lb(s)
Stock quantity: 16

882. 1-1/2" x 1" Black Cast Iron Steam 90° Elbow (Imported)

Price: 8.19 USD
SKU: 917
Weight: 2.50 lb(s)
Stock quantity: 13

883. 1-1/2" x 1" Black Cast Iron Steam Tee

Price: 10.82 USD
SKU: 1383
Weight: 2.54 lb(s)
Stock quantity: 31

884. 1-1/2" x 1" Black Cast Iron Steam Tee (Domestic)

Price: 9.38 USD
SKU: 6447
Weight: 1.00 lb(s)
Stock quantity: 55

885. 1-1/2" x 1" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 3.87 USD
SKU: 2562
Weight: 0.80 lb(s)
Stock quantity: 24

886. 1-1/2" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 6.42 USD
SKU: 326
Weight: 1.37 lb(s)
Stock quantity: 8

887. 1-1/2" x 1" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 14.84 USD
SKU: 1282
Weight: 0.15 lb(s)
Stock quantity: 2

888. 1-1/2" x 1" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 7.53 USD
SKU: 1203
Weight: 0.54 lb(s)
Stock quantity: 4

889. 1-1/2" x 1" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 18.31 USD
SKU: 1260
Weight: 0.92 lb(s)
Stock quantity: 4

890. 1-1/2" x 1" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 21.04 USD
SKU: 1271
Weight: 1.60 lb(s)
Stock quantity: 2

891. 1-1/2" x 1" Copper Reducer Coupling

Price: 4.27 USD
SKU: 1935
Weight: 0.21 lb(s)
Stock quantity: 27

892. 1-1/2" x 1" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 13.20 USD
SKU: 2178
Weight: 0.37 lb(s)

893. 1-1/2" x 1" FTG x C Copper Reducer Fitting Adapter

Price: 3.66 USD
SKU: 1967
Weight: 0.30 lb(s)
Stock quantity: 8

894. 1-1/2" x 1" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.74 USD
SKU: 4358
Weight: 0.44 lb(s)
Stock quantity: 3

895. 1-1/2" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.20 USD
SKU: 2966
Weight: 1.37 lb(s)
Stock quantity: 2

896. 1-1/2" x 1" PVC DWV Reducer Coupling (HUB x HUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness.Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 1.21 USD
SKU: 6023
Weight: 0.16 lb(s)
Stock quantity: 0

897. 1-1/2" x 1" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.76 USD
SKU: 6131
Weight: 0.32 lb(s)
Stock quantity: 0

898. 1-1/2" x 1" x 1" Black Cast Iron Steam Tee

Price: 9.87 USD
SKU: 1631
Weight: 2.54 lb(s)
Stock quantity: 53

899. 1-1/2" x 1" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 6.36 USD
SKU: 334
Weight: 1.19 lb(s)
Stock quantity: 8

900. 1-1/2" x 1" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 14.35 USD
SKU: 2079
Weight: 0.62 lb(s)

901. 1-1/2" x 1" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.48 USD
SKU: 2958
Weight: 1.19 lb(s)
Stock quantity: 0

902. 1-1/2" x 1" x 1/2" Black Cast Iron Steam Tee

Price: 6.10 USD
SKU: 1604
Weight: 2.54 lb(s)
Stock quantity: 66

903. 1-1/2" x 1" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 10.93 USD
SKU: 6080
Weight: 0.98 lb(s)
Stock quantity: 5

904. 1-1/2" x 1" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.66 USD
SKU: 2081
Weight: 0.46 lb(s)

905. 1-1/2" x 1" x 1-1/2" Black Cast Iron Steam Tee

Price: 10.58 USD
SKU: 1656
Weight: 2.54 lb(s)
Stock quantity: 15

906. 1-1/2" x 1" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 7.46 USD
SKU: 126
Weight: 1.45 lb(s)
Stock quantity: 8

907. 1-1/2" x 1" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.02 USD
SKU: 2078
Weight: 0.68 lb(s)

908. 1-1/2" x 1" x 1-1/4" Black Cast Iron Steam Tee

Price: 10.58 USD
SKU: 1649
Weight: 2.54 lb(s)
Stock quantity: 13

909. 1-1/2" x 1" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 7.22 USD
SKU: 215
Weight: 1.32 lb(s)
Stock quantity: 4

910. 1-1/2" x 1" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.66 USD
SKU: 3099
Weight: 0.62 lb(s)

911. 1-1/2" x 1" x 3/4" Black Cast Iron Steam Tee

Price: 8.66 USD
SKU: 1612
Weight: 2.54 lb(s)
Stock quantity: 24

912. 1-1/2" x 1" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 9.04 USD
SKU: 6074
Weight: 1.08 lb(s)
Stock quantity: 22

913. 1-1/2" x 1" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.02 USD
SKU: 2080
Weight: 0.47 lb(s)

914. 1-1/2" x 1"Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.61 USD
SKU: 2848
Weight: 0.96 lb(s)
Stock quantity: 4

915. 1-1/2" x 1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.70 USD
SKU: 372
Weight: 0.69 lb(s)
Stock quantity: 4

916. 1-1/2" x 1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.53 USD
SKU: 444
Weight: 0.42 lb(s)
Stock quantity: 17

917. 1-1/2" x 1/2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 6.72 USD
SKU: 1286
Weight: 2.54 lb(s)
Stock quantity: 10

918. 1-1/2" x 1/2" Black Cast Iron Steam Tee

Price: 7.71 USD
SKU: 1366
Weight: 2.54 lb(s)
Stock quantity: 7

919. 1-1/2" x 1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 3.98 USD
SKU: 172
Weight: 0.65 lb(s)
Stock quantity: 18

920. 1-1/2" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 7.15 USD
SKU: 82
Weight: 1.12 lb(s)
Stock quantity: 34

921. 1-1/2" x 1/2" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 9.17 USD
SKU: 1201
Weight: 0.52 lb(s)
Stock quantity: 2

922. 1-1/2" x 1/2" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 15.86 USD
SKU: 1258
Weight: 0.77 lb(s)
Stock quantity: 2

923. 1-1/2" x 1/2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 21.04 USD
SKU: 1134
Weight: 1.30 lb(s)
Stock quantity: 1

924. 1-1/2" x 1/2" Copper Reducer Coupling

Price: 4.55 USD
SKU: 1937
Weight: 0.18 lb(s)
Stock quantity: 26

925. 1-1/2" x 1/2" FTG x C Copper Reducer Fitting Adapter

Price: 3.66 USD
SKU: 1969
Weight: 0.18 lb(s)
Stock quantity: 19

926. 1-1/2" x 1/2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.49 USD
SKU: 2846
Weight: 0.69 lb(s)
Stock quantity: 4

927. 1-1/2" x 1/2" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.01 USD
SKU: 4662
Weight: 0.42 lb(s)
Stock quantity: 2

928. 1-1/2" x 1/2" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.51 USD
SKU: 3661
Weight: 0.65 lb(s)
Stock quantity: 3

929. 1-1/2" x 1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 7.11 USD
SKU: 2964
Weight: 1.12 lb(s)
Stock quantity: 1

930. 1-1/2" x 1/2" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.76 USD
SKU: 5998
Weight: 0.24 lb(s)
Stock quantity: 0

931. 1-1/2" x 1/2" x 1-1/2" Black Cast Iron Steam Tee

Price: 9.20 USD
SKU: 1539
Weight: 2.54 lb(s)
Stock quantity: 20

932. 1-1/2" x 1/2" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 6.84 USD
SKU: 119
Weight: 1.33 lb(s)
Stock quantity: 13

933. 1-1/2" x 1/2" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.06 USD
SKU: 2086
Weight: 0.71 lb(s)

934. 1-1/2" x 1/2" x 1-1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 7.09 USD
SKU: 2955
Weight: 1.33 lb(s)
Stock quantity: 0

935. 1-1/2" x 1/2" x 1-1/4" Black Cast Iron Steam Tee

Price: 14.26 USD
SKU: 1178
Weight: 2.54 lb(s)
Stock quantity: 10

936. 1-1/2" x 1/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.95 USD
SKU: 230
Weight: 0.40 lb(s)
Stock quantity: 10

937. 1-1/2" x 10' SCH 40 Black Pipe

Price: 27.18 USD
SKU: 1087
Stock quantity: 246

938. 1-1/2" x 10' SCH 40 Galvanized Pipe

Price: 30.13 USD
SKU: 3200
Stock quantity: 7

939. 1-1/2" x 10' SCH 40 PVC DWV Pipe

Price: 6.39 USD
SKU: 880
Stock quantity: 36

940. 1-1/2" x 10' Type L Copper Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.60"

Price: 46.26 USD
SKU: 2192
Weight: 11.40 lb(s)
Stock quantity: 26

941. 1-1/2" x 10" Copper M Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.049"

Price: 48.83 USD
SKU: 2196
Weight: 94.00 lb(s)
Stock quantity: 20

942. 1-1/2" x 10" No Hub Cast Iron Pipe

Cast-iron construction 212° F maximum working temperature For non-pressure applications Noncombustible and offers superior sound-deadening performance Conform to ASTM A 888 and CISPI Standard 301

Price: 43.71 USD
SKU: 8229
Weight: 28.50 lb(s)
Stock quantity: 3

943. 1-1/2" x 1-1/2" Closet Spud

Price: 7.86 USD
SKU: 4635
Weight: 1.00 lb(s)
Stock quantity: 2

944. 1-1/2" x 1-1/2" LA Rough Brass Swivel P-Trap w/o Cleanout

IPS ConnectionWorking temperature range of 0° to 120°FRough brass finish LA p-traps feature a union connection at the top of the u-bend to allow the elbow to swivel

Price: 19.95 USD
SKU: 6335
Weight: 1.70 lb(s)
Stock quantity: 6

945. 1-1/2" x 1-1/2" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 7.18 USD
SKU: 2070
Weight: 0.60 lb(s)

946. 1-1/2" x 1-1/2" x 1" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 29.35 USD
SKU: 3083
Weight: 0.79 lb(s)

947. 1-1/2" x 1-1/2" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 7.34 USD
SKU: 2072
Weight: 0.44 lb(s)

948. 1-1/2" x 1-1/2" x 1/2" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 23.35 USD
SKU: 3090
Weight: 0.62 lb(s)

949. 1-1/2" x 1-1/2" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 7.34 USD
SKU: 2069
Weight: 0.61 lb(s)

950. 1-1/2" x 1-1/2" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 26.60 USD
SKU: 2068
Weight: 1.16 lb(s)

951. 1-1/2" x 1-1/2" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 7.09 USD
SKU: 2071
Weight: 0.50 lb(s)

952. 1-1/2" x 1-1/2" x 3/4" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 22.92 USD
SKU: 4346
Weight: 0.70 lb(s)

953. 1-1/2" x 1-1/4' FTG x C Copper Reducer Fitting Adapter

Price: 3.66 USD
SKU: 1966
Weight: 0.90 lb(s)
Stock quantity: 16

954. 1-1/2" x 1-1/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.50 USD
SKU: 3546
Weight: 0.13 lb(s)
Stock quantity: 10

955. 1-1/2" x 1-1/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.53 USD
SKU: 4314
Weight: 0.35 lb(s)
Stock quantity: 42

956. 1-1/2" x 1-1/4" Black Cast Iron Steam 90° Elbow (Imported)

Price: 8.72 USD
SKU: 1305
Weight: 2.54 lb(s)
Stock quantity: 4

957. 1-1/2" x 1-1/4" Black Cast Iron Steam Tee

Price: 11.78 USD
SKU: 1392
Weight: 2.54 lb(s)
Stock quantity: 40

958. 1-1/2" x 1-1/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 3.32 USD
SKU: 185
Weight: 0.87 lb(s)
Stock quantity: 24

959. 1-1/2" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 7.96 USD
SKU: 80
Weight: 1.53 lb(s)
Stock quantity: 20

960. 1-1/2" x 1-1/4" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 8.58 USD
SKU: 1204
Weight: 0.45 lb(s)
Stock quantity: 5

961. 1-1/2" x 1-1/4" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 14.07 USD
SKU: 1261
Weight: 0.99 lb(s)
Stock quantity: 0

962. 1-1/2" x 1-1/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 21.04 USD
SKU: 1272
Weight: 1.70 lb(s)
Stock quantity: 1

963. 1-1/2" x 1-1/4" Closet Spud

Price: 7.86 USD
SKU: 2369
Weight: 0.80 lb(s)
Stock quantity: 2

964. 1-1/2" x 1-1/4" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 13.20 USD
SKU: 2522
Weight: 0.41 lb(s)

965. 1-1/2" x 1-1/4" Copper Reducer Coupling

Price: 4.27 USD
SKU: 1934
Weight: 0.22 lb(s)
Stock quantity: 8

966. 1-1/2" x 1-1/4" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 12.87 USD
SKU: 2149
Weight: 0.40 lb(s)

967. 1-1/2" x 1-1/4" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 11.52 USD
SKU: 2177
Weight: 0.46 lb(s)

968. 1-1/2" x 1-1/4" Die Cast Slip Joint Nut

Finish: Crome Plated

Price: 0.84 USD
SKU: 2463
Weight: 0.10 lb(s)
Stock quantity: 79

969. 1-1/2" x 1-1/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.61 USD
SKU: 2849
Weight: 1.13 lb(s)
Stock quantity: 0

970. 1-1/2" x 1-1/4" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.57 USD
SKU: 2797
Weight: 0.35 lb(s)
Stock quantity: 0

971. 1-1/2" x 1-1/4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.99 USD
SKU: 3028
Weight: 0.87 lb(s)
Stock quantity: 0

972. 1-1/2" x 1-1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.28 USD
SKU: 2967
Weight: 1.53 lb(s)
Stock quantity: 2

973. 1-1/2" x 1-1/4" Neo-Mold Slip Join Washer

Price: 0.94 USD
SKU: 5373
Weight: 0.01 lb(s)
Stock quantity: 122

974. 1-1/2" x 1-1/4" NY Rough Brass P-Trap w/Cleanout

IPS ConnectionWorking temperature range of 0° to 120°FRough brass finish NY traps are a single body piece without a union swivel connection

Price: 15.40 USD
SKU: 1776
Weight: 1.70 lb(s)
Stock quantity: 7

975. 1-1/2" x 1-1/4" PVC DWV Fitting Trap Adapter (SPIGOT x SLIP JAMNUT)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.19 USD
SKU: 866
Weight: 0.14 lb(s)
Stock quantity: 29

976. 1-1/2" x 1-1/4" PVC DWV Male Adapter

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedSize range 1¼" to 4"

Price: 1.19 USD
SKU: 745
Weight: 0.10 lb(s)
Stock quantity: 0

977. 1-1/2" x 1-1/4" PVC DWV Reducer Coupling (HUB x HUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness.Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 1.21 USD
SKU: 6046
Weight: 0.16 lb(s)
Stock quantity: 0

978. 1-1/2" x 1-1/4" PVC DWV Trap Adapter (HUB x SLIP JAMNUT)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.19 USD
SKU: 865
Weight: 0.13 lb(s)
Stock quantity: 10

979. 1-1/2" x 1-1/4" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.76 USD
SKU: 5987
Weight: 0.32 lb(s)
Stock quantity: 0

980. 1-1/2" x 1-1/4" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 2.28 USD
SKU: 4168
Weight: 0.40 lb(s)
Stock quantity: 14

981. 1-1/2" x 1-1/4" Slip Joint Washer

Price: 0.21 USD
SKU: 2289
Weight: 0.10 lb(s)
Stock quantity: 238

982. 1-1/2" x 1-1/4" x 1" Black Cast Iron Steam Tee

Price: 9.89 USD
SKU: 1333
Weight: 2.54 lb(s)
Stock quantity: 19

983. 1-1/2" x 1-1/4" x 1" Black Cast Iron Steam Tee (Domestic)

Price: 9.34 USD
SKU: 6442
Weight: 2.54 lb(s)
Stock quantity: 74

984. 1-1/2" x 1-1/4" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 6.84 USD
SKU: 311
Weight: 1.31 lb(s)
Stock quantity: 15

985. 1-1/2" x 1-1/4" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 14.75 USD
SKU: 2075
Weight: 0.59 lb(s)

986. 1-1/2" x 1-1/4" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.34 USD
SKU: 2961
Weight: 1.31 lb(s)
Stock quantity: 0

987. 1-1/2" x 1-1/4" x 1/2" Black Cast Iron Steam Tee

Price: 11.17 USD
SKU: 1316
Weight: 2.54 lb(s)
Stock quantity: 12

988. 1-1/2" x 1-1/4" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 6.58 USD
SKU: 6181
Weight: 1.07 lb(s)
Stock quantity: 12

989. 1-1/2" x 1-1/4" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.26 USD
SKU: 2077
Weight: 0.42 lb(s)

990. 1-1/2" x 1-1/4" x 1-1/2" Black Cast Iron Steam Tee

Price: 7.25 USD
SKU: 1351
Weight: 2.54 lb(s)
Stock quantity: 5

991. 1-1/2" x 1-1/4" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 8.34 USD
SKU: 117
Weight: 1.54 lb(s)
Stock quantity: 6

992. 1-1/2" x 1-1/4" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.26 USD
SKU: 2073
Weight: 0.72 lb(s)

993. 1-1/2" x 1-1/4" x 1-1/4" Black Cast Iron Steam Tee

Price: 7.06 USD
SKU: 1342
Weight: 2.54 lb(s)
Stock quantity: 11

994. 1-1/2" x 1-1/4" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 9.00 USD
SKU: 115
Weight: 1.42 lb(s)
Stock quantity: 9

995. 1-1/2" x 1-1/4" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 14.44 USD
SKU: 2074
Weight: 0.62 lb(s)

996. 1-1/2" x 1-1/4" x 2" Black Cast Iron Steam Tee

Price: 7.52 USD
SKU: 1615
Weight: 2.54 lb(s)
Stock quantity: 6

997. 1-1/2" x 1-1/4" x 3/4" Black Cast Iron Steam Tee

Price: 6.58 USD
SKU: 1326
Weight: 2.54 lb(s)
Stock quantity: 30

998. 1-1/2" x 1-1/4" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 9.35 USD
SKU: 78
Weight: 1.13 lb(s)
Stock quantity: 5

999. 1-1/2" x 1-1/4" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 14.51 USD
SKU: 2076
Weight: 0.46 lb(s)

1000. 1-1/2" x 1-1/4" x 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.48 USD
SKU: 2960
Weight: 1.13 lb(s)
Stock quantity: 0

1001. 1-1/2" x 12", 17 GA Rough Brass Dishwasher Tailpiece

1/2” BranchFinish: Rough Brass

Price: 13.09 USD
SKU: 8402
Weight: 0.72 lb(s)
Stock quantity: 35

1002. 1-1/2" x 12", 17 GA Rough Brass Flanged Sink Tailpiece

Direct connectFinish: Rough Brass

Price: 10.54 USD
SKU: 4940
Weight: 0.62 lb(s)
Stock quantity: 44

1003. 1-1/2" x 12", 17 GA Rough Brass Slip Joint Extension Tube

S/J connectWith nuts & washersFinish: Rough brass

Price: 9.86 USD
SKU: 5138
Weight: 0.74 lb(s)
Stock quantity: 32

1004. 1-1/2" x 12", 17 GA Rough Brass Slip Joint Waste Bend

S/J connectWith nuts & washersFinish: Rough Brass

Price: 14.09 USD
SKU: 5378
Weight: 0.82 lb(s)
Stock quantity: 13

1005. 1-1/2" x 12", 17 GA Rough Brass Threaded Tube

Threaded both endsS/J connectFinish: Rough Brass

Price: 8.33 USD
SKU: 5130
Weight: 0.58 lb(s)
Stock quantity: 30

1006. 1-1/2" x 12", 17GA Rough Brass Flanged Waste Bend

Finish: Rough brass

Price: 11.87 USD
SKU: 5237
Weight: 0.72 lb(s)
Stock quantity: 15

1007. 1-1/2" x 12", 22 GA Chrome Plated Brass Slip Joint Waste Bend

S/J connectWith nuts & washersFinish: Chrome plated

Price: 7.88 USD
SKU: 4736
Weight: 0.38 lb(s)
Stock quantity: 26

1008. 1-1/2" x 12", 22 GA Crome Plated Flanged Sink Tailpiece

Direct connectFinish: Crome Plated

Price: 5.74 USD
SKU: 2419
Weight: 0.32 lb(s)
Stock quantity: 6

1009. 1-1/2" x 12", 22 GA Crome Plated Threaded Tube

Threaded both endsS/J connectFinish: Crome Plated

Price: 7.63 USD
SKU: 2817
Weight: 0.50 lb(s)
Stock quantity: 42

1010. 1-1/2" x 12", 22 GA Rough Brass Dishwasher Tailpiece

1/2” BranchFinish: Rough Brass

Price: 7.87 USD
SKU: 1823
Weight: 0.46 lb(s)
Stock quantity: 26

1011. 1-1/2" x 12", 22 GA Rough Brass Flanged Sink Tailpiece

Direct connectFinish: Rough Brass

Price: 3.66 USD
SKU: 2442
Weight: 0.32 lb(s)
Stock quantity: 24

1012. 1-1/2" x 12", 22 GA Rough Brass Flanged Waste Bend

Finish: Rough brass

Price: 6.02 USD
SKU: 3566
Weight: 0.34 lb(s)
Stock quantity: 31

1013. 1-1/2" x 12", 22 GA Rough Brass Slip Joint Extension Tube

S/J connectWith nuts & washersFinish: Rough brass

Price: 5.19 USD
SKU: 2396
Weight: 0.38 lb(s)
Stock quantity: 42

1014. 1-1/2" x 12", 22 GA Rough Brass Slip Joint Waste Bend

S/J connectWith nuts & washersFinish: Rough brass

Price: 6.13 USD
SKU: 3256
Weight: 0.44 lb(s)
Stock quantity: 37

1015. 1-1/2" x 12", 22 GA Rough Brass Threaded Tube

Threaded both endsS/J connectFinish: Rough Brass

Price: 4.96 USD
SKU: 3248
Weight: 0.40 lb(s)
Stock quantity: 22

1016. 1-1/2" x 12", 22 GA Rough Brass Wasing Machine Tailpiece

3/4” BranchFinish: Rough Brass

Price: 3.85 USD
SKU: 8401
Weight: 0.44 lb(s)
Stock quantity: 21

1017. 1-1/2" x 18", 17 GA Rough Brass Slip Joint Waste Bend

S/J connectWith nuts & washersFinish: Rough Brass

Price: 17.85 USD
SKU: 5228
Weight: 1.30 lb(s)
Stock quantity: 15

1018. 1-1/2" x 18", 22 GA Rough Brass Flanged Waste Bend

Finish: Rough brass

Price: 7.65 USD
SKU: 6090
Weight: 0.50 lb(s)
Stock quantity: 47

1019. 1-1/2" x 18", 22 GA Rough Brass Slip Joint Waste Bend

S/J connectWith nuts & washersFinish: Rough brass

Price: 6.55 USD
SKU: 3270
Weight: 0.50 lb(s)
Stock quantity: 9

1020. 1-1/2" x 18", 22 GA Rough Brass Threaded Tube

Threaded both endsS/J connectFinish: Rough Brass

Price: 8.15 USD
SKU: 3812
Weight: 0.60 lb(s)
Stock quantity: 0

1021. 1-1/2" x 2" Black Cast Iron Steam Tee (Imported)

Price: 7.96 USD
SKU: 1064
Weight: 2.54 lb(s)
Stock quantity: 1

1022. 1-1/2" x 2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 16.37 USD
SKU: 6077
Weight: 1.60 lb(s)
Stock quantity: 3

1023. 1-1/2" x 2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 6.83 USD
SKU: 1684
Weight: 0.36 lb(s)
Stock quantity: 7

1024. 1-1/2" x 2" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 22.56 USD
SKU: 2150
Weight: 0.65 lb(s)

1025. 1-1/2" x 2" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 21.60 USD
SKU: 2179
Weight: 0.86 lb(s)

1026. 1-1/2" x 2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.06 USD
SKU: 2351
Weight: 0.49 lb(s)
Stock quantity: 45

1027. 1-1/2" x 2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.74 USD
SKU: 484
Weight: 0.49 lb(s)
Stock quantity: 36

1028. 1-1/2" x 2-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 7.12 USD
SKU: 1685
Weight: 0.49 lb(s)
Stock quantity: 20

1029. 1-1/2" x 2-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.36 USD
SKU: 2676
Weight: 0.63 lb(s)
Stock quantity: 18

1030. 1-1/2" x 2-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.46 USD
SKU: 493
Weight: 0.63 lb(s)
Stock quantity: 11

1031. 1-1/2" x 24", 17 GA Rough Brass Slip Joint Waste Bend

S/J connectWith nuts & washersFinish: Rough Brass

Price: 9.35 USD
SKU: 3148
Weight: 1.50 lb(s)
Stock quantity: 11

1032. 1-1/2" x 24", 17 GA Rough Brass Slip Joint Waste Bend

S/J connectWith nuts & washersFinish: Rough brass

Price: 12.50 USD
SKU: 8399
Weight: 0.50 lb(s)
Stock quantity: 0

1033. 1-1/2" x 24", 22 GA Rough Brass Flanged Double Waste Bend

With nuts & washersFinish: Rough Brass

Price: 11.77 USD
SKU: 1788
Weight: 0.80 lb(s)
Stock quantity: 5

1034. 1-1/2" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 8.00 USD
SKU: 1686
Weight: 0.62 lb(s)
Stock quantity: 12

1035. 1-1/2" x 3" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.42 USD
SKU: 2403
Weight: 0.77 lb(s)
Stock quantity: 49

1036. 1-1/2" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.79 USD
SKU: 494
Weight: 0.77 lb(s)
Stock quantity: 59

1037. 1-1/2" x 3/4' x 1-1/2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 16.45 USD
SKU: 1273
Weight: 1.42 lb(s)
Stock quantity: 0

1038. 1-1/2" x 3/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.15 USD
SKU: 4052
Weight: 0.80 lb(s)
Stock quantity: 5

1039. 1-1/2" x 3/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.42 USD
SKU: 357
Weight: 0.46 lb(s)
Stock quantity: 13

1040. 1-1/2" x 3/4" Black Cast Iron Steam 90° Elbow (Imported)

Price: 8.49 USD
SKU: 1297
Weight: 2.54 lb(s)
Stock quantity: 4

1041. 1-1/2" x 3/4" Black Cast Iron Steam Tee (Imported)

Price: 5.84 USD
SKU: 1375
Weight: 2.54 lb(s)
Stock quantity: 26

1042. 1-1/2" x 3/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 5.39 USD
SKU: 181
Weight: 0.70 lb(s)
Stock quantity: 17

1043. 1-1/2" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 7.46 USD
SKU: 309
Weight: 1.22 lb(s)
Stock quantity: 11

1044. 1-1/2" x 3/4" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 10.41 USD
SKU: 1202
Weight: 0.56 lb(s)
Stock quantity: 2

1045. 1-1/2" x 3/4" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 16.88 USD
SKU: 1259
Weight: 0.82 lb(s)
Stock quantity: 2

1046. 1-1/2" x 3/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 21.04 USD
SKU: 1268
Weight: 1.40 lb(s)
Stock quantity: 2

1047. 1-1/2" x 3/4" Copper Reducer Coupling

Price: 4.27 USD
SKU: 1936
Weight: 0.19 lb(s)
Stock quantity: 63

1048. 1-1/2" x 3/4" FTG x C Copper Reducer Fitting Adapter

Price: 3.66 USD
SKU: 1968
Weight: 0.23 lb(s)
Stock quantity: 5

1049. 1-1/2" x 3/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.61 USD
SKU: 2847
Weight: 0.81 lb(s)
Stock quantity: 0

1050. 1-1/2" x 3/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.51 USD
SKU: 4493
Weight: 0.46 lb(s)
Stock quantity: 1

1051. 1-1/2" x 3/4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.10 USD
SKU: 3026
Weight: 0.70 lb(s)
Stock quantity: 1

1052. 1-1/2" x 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.20 USD
SKU: 2965
Weight: 1.23 lb(s)
Stock quantity: 2

1053. 1-1/2" x 3/4" PVC DWV Reducer Coupling (HUB x HUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness.Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 1.21 USD
SKU: 6011
Weight: 0.16 lb(s)
Stock quantity: 0

1054. 1-1/2" x 3/4" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.76 USD
SKU: 6034
Weight: 0.28 lb(s)
Stock quantity: 0

1055. 1-1/2" x 3/4" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 9.02 USD
SKU: 6100
Weight: 1.12 lb(s)
Stock quantity: 17

1056. 1-1/2" x 3/4" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.66 USD
SKU: 2083
Weight: 0.59 lb(s)

1057. 1-1/2" x 3/4" x 1-1/2" Black Cast Iron Steam Tee (Imported)

Price: 9.32 USD
SKU: 1585
Weight: 2.54 lb(s)
Stock quantity: 15

1058. 1-1/2" x 3/4" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 8.01 USD
SKU: 84
Weight: 1.38 lb(s)
Stock quantity: 12

1059. 1-1/2" x 3/4" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 14.35 USD
SKU: 2082
Weight: 0.67 lb(s)

1060. 1-1/2" x 3/4" x 1-1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.53 USD
SKU: 2957
Weight: 1.38 lb(s)
Stock quantity: 0

1061. 1-1/2" x 3/4" x 1-1/4" Black Cast Iron Steam Tee (Imported)

Price: 9.55 USD
SKU: 1566
Weight: 2.54 lb(s)
Stock quantity: 17

1062. 1-1/2" x 3/4" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 8.80 USD
SKU: 315
Weight: 1.31 lb(s)
Stock quantity: 2

1063. 1-1/2" x 3/4" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.84 USD
SKU: 3211
Weight: 0.62 lb(s)

1064. 1-1/2" x 3/4" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 10.14 USD
SKU: 121
Weight: 0.94 lb(s)
Stock quantity: 19

1065. 1-1/2" x 3/4" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.66 USD
SKU: 2084
Weight: 0.56 lb(s)

1066. 1-1/2" x 3/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.88 USD
SKU: 1309
Weight: 0.38 lb(s)
Stock quantity: 2

1067. 1-1/2" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 9.20 USD
SKU: 1687
Weight: 0.75 lb(s)
Stock quantity: 21

1068. 1-1/2" x 3-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.36 USD
SKU: 2360
Weight: 0.94 lb(s)
Stock quantity: 28

1069. 1-1/2" x 3-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.95 USD
SKU: 478
Weight: 0.94 lb(s)
Stock quantity: 48

1070. 1-1/2" x 36", 22 GA Rough Brass Slip Joint Waste Bend

S/J connectWith nuts & washersFinish: Rough brass

Price: 16.47 USD
SKU: 2385
Weight: 0.50 lb(s)
Stock quantity: 2

1071. 1-1/2" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 10.64 USD
SKU: 1688
Weight: 0.88 lb(s)
Stock quantity: 19

1072. 1-1/2" x 4" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.79 USD
SKU: 2650
Weight: 1.08 lb(s)
Stock quantity: 38

1073. 1-1/2" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.15 USD
SKU: 458
Weight: 1.08 lb(s)
Stock quantity: 32

1074. 1-1/2" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 12.00 USD
SKU: 1689
Weight: 1.01 lb(s)
Stock quantity: 21

1075. 1-1/2" x 4-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.56 USD
SKU: 2819
Weight: 1.25 lb(s)
Stock quantity: 57

1076. 1-1/2" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.48 USD
SKU: 619
Weight: 1.25 lb(s)
Stock quantity: 58

1077. 1-1/2" x 5 yards Abrasive Cloth Kwik-Kleen

Price: 3.11 USD
SKU: 1520
Weight: 0.35 lb(s)
Stock quantity: 24

1078. 1-1/2" x 5 yards Abrasive Cloth Open Mesh

Price: 5.02 USD
SKU: 1496
Weight: 0.35 lb(s)
Stock quantity: 4

1079. 1-1/2" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 13.26 USD
SKU: 1690
Weight: 1.14 lb(s)
Stock quantity: 22

1080. 1-1/2" x 5" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.69 USD
SKU: 2828
Weight: 1.38 lb(s)
Stock quantity: 11

1081. 1-1/2" x 5" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.38 USD
SKU: 620
Weight: 1.38 lb(s)
Stock quantity: 32

1082. 1-1/2" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 14.80 USD
SKU: 1691
Weight: 1.27 lb(s)
Stock quantity: 22

1083. 1-1/2" x 5-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 3.02 USD
SKU: 2813
Weight: 1.59 lb(s)
Stock quantity: 23

1084. 1-1/2" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.81 USD
SKU: 3747
Weight: 1.59 lb(s)
Stock quantity: 59

1085. 1-1/2" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 15.92 USD
SKU: 1692
Weight: 1.40 lb(s)
Stock quantity: 14

1086. 1-1/2" x 6" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 3.67 USD
SKU: 2389
Weight: 1.71 lb(s)
Stock quantity: 21

1087. 1-1/2" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.96 USD
SKU: 613
Weight: 1.71 lb(s)
Stock quantity: 30

1088. 1-1/2" x 6", 22 GA Rough Brass Slip Joint Waste Bend

S/J connectWith nuts & washersFinish: Rough Brass

Price: 5.31 USD
SKU: 2497
Weight: 0.26 lb(s)
Stock quantity: 35

1089. 1-1/2" x 8", 22 GA Rough Brass Slip Joint Waste Bend

S/J connectWith nuts & washersFinish: Rough Brass

Price: 5.03 USD
SKU: 3287
Weight: 0.30 lb(s)
Stock quantity: 38

1090. 1-1/2" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 5.68 USD
SKU: 1683
Weight: 0.29 lb(s)
Stock quantity: 8

1091. 1-1/2" x Close Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.72 USD
SKU: 2341
Weight: 0.41 lb(s)
Stock quantity: 45

1092. 1-1/2" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.27 USD
SKU: 500
Weight: 0.41 lb(s)
Stock quantity: 5

1093. 1-1/2", 17 GA Rough Brass Double Offset

S/J connectWith nuts & washersFinish: Rough Brass

Price: 14.34 USD
SKU: 5234
Weight: 0.82 lb(s)
Stock quantity: 32

1094. 1-1/2", 17 GA Utility/Milwaukee Brass P-Trap w/Cleanout

Finish: Crome Plated

Price: 23.60 USD
SKU: 2420
Weight: 1.64 lb(s)
Stock quantity: 53

1095. 1-1/2", 20 GA Brass P-Trap w/o Cleanout

S/J connect with flangeFinish: Crome Plated

Price: 20.24 USD
SKU: 8409
Weight: 1.02 lb(s)
Stock quantity: 64

1096. 1-1/2", 22 GA Brass P-Trap w/o Cleanout

S/J connect with flangeFinish: Crome Plated

Price: 11.88 USD
SKU: 2451
Weight: 0.80 lb(s)
Stock quantity: 19

1097. 1-1/2", 22 GA Crome Plated Double Offset

S/J connectWith nuts & washersFinish: Crome Plated

Price: 8.37 USD
SKU: 2435
Weight: 0.38 lb(s)
Stock quantity: 48

1098. 1-1/2", 22 GA Rough Brass Double Offset

S/J connectWith nuts & washersFinish: Rough Brass

Price: 5.61 USD
SKU: 2427
Weight: 0.36 lb(s)
Stock quantity: 21

1099. 1-1/4 PVC DWV Coupling

Maximum service temperature 140°FDo not test or use with compressed air or other gasesHub x hub connectionsASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.94 USD
SKU: 962
Weight: 0.10 lb(s)
Stock quantity: 16

1100. 1-1/4" -3-1/2", 153 Quick-Acting Tubing Cutter

Price: 107.26 USD
SKU: 4369
Weight: 2.00 lb(s)
Stock quantity: 2

1101. 1-1/4" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 7.36 USD
SKU: 3106
Weight: 0.20 lb(s)
Stock quantity: 1

1102. 1-1/4" Black 45° Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.73 USD
SKU: 318
Weight: 0.83 lb(s)
Stock quantity: 11

1103. 1-1/4" Black 45° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.84 USD
SKU: 305
Weight: 0.77 lb(s)
Stock quantity: 18

1104. 1-1/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.52 USD
SKU: 93
Weight: 0.90 lb(s)
Stock quantity: 78

1105. 1-1/4" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.41 USD
SKU: 288
Weight: 0.86 lb(s)
Stock quantity: 19

1106. 1-1/4" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 2.53 USD
SKU: 431
Weight: 0.48 lb(s)
Stock quantity: 111

1107. 1-1/4" Black Cast Iron Steam 45° Elbow (Imported)

Price: 5.56 USD
SKU: 947
Weight: 1.32 lb(s)
Stock quantity: 17

1108. 1-1/4" Black Cast Iron Steam 90° Elbow (Domestic)

Price: 4.69 USD
SKU: 6467
Weight: 1.32 lb(s)
Stock quantity: 27

1109. 1-1/4" Black Cast Iron Steam 90° Elbow (Imported)

Price: 5.02 USD
SKU: 946
Weight: 1.32 lb(s)
Stock quantity: 53

1110. 1-1/4" Black Cast Iron Steam Tee (Imported)

Price: 7.02 USD
SKU: 1001
Weight: 1.40 lb(s)
Stock quantity: 53

1111. 1-1/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 3.30 USD
SKU: 178
Weight: 0.69 lb(s)
Stock quantity: 58

1112. 1-1/4" Black Cross Tee

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 9.92 USD
SKU: 90
Weight: 1.62 lb(s)
Stock quantity: 2

1113. 1-1/4" Black Extension

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 8.58 USD
SKU: 367
Weight: 0.53 lb(s)
Stock quantity: 3

1114. 1-1/4" Black Floor Flange

Floor flange is used to secure pipe to wall or floor mounts for DIY (do-it-yourself) applicationsMeets in ASTM and ANSI standards

Price: 5.83 USD
SKU: 3048
Weight: 0.90 lb(s)
Stock quantity: 10

1115. 1-1/4" Black Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 1.74 USD
SKU: 436
Weight: 0.33 lb(s)
Stock quantity: 82

1116. 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 3.96 USD
SKU: 83
Weight: 1.30 lb(s)
Stock quantity: 18

1117. 1-1/4" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 9.35 USD
SKU: 228
Weight: 1.22 lb(s)
Stock quantity: 93

1118. 1-1/4" Brass 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 10.89 USD
SKU: 1168
Weight: 1.00 lb(s)
Stock quantity: 6

1119. 1-1/4" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 13.13 USD
SKU: 1153
Weight: 1.10 lb(s)
Stock quantity: 12

1120. 1-1/4" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 7.51 USD
SKU: 1115
Weight: 0.58 lb(s)
Stock quantity: 11

1121. 1-1/4" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 10.94 USD
SKU: 1129
Weight: 0.81 lb(s)
Stock quantity: 21

1122. 1-1/4" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 4.99 USD
SKU: 1413
Weight: 0.43 lb(s)
Stock quantity: 10

1123. 1-1/4" Brass Street 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 13.30 USD
SKU: 1428
Weight: 1.00 lb(s)
Stock quantity: 2

1124. 1-1/4" Brass Street 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 13.30 USD
SKU: 1441
Weight: 0.90 lb(s)
Stock quantity: 2

1125. 1-1/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 12.36 USD
SKU: 1465
Weight: 1.32 lb(s)
Stock quantity: 3

1126. 1-1/4" Brass Union

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 28.51 USD
SKU: 1479
Weight: 0.22 lb(s)
Stock quantity: 6

1127. 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 6.40 USD
SKU: 2032
Weight: 0.52 lb(s)
Stock quantity: 37

1128. 1-1/4" Copper 45° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.03 USD
SKU: 1990
Weight: 0.22 lb(s)

1129. 1-1/4" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.05 USD
SKU: 2007
Weight: 0.26 lb(s)

1130. 1-1/4" Copper Caps

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.57 USD
SKU: 1869
Weight: 0.11 lb(s)

1131. 1-1/4" Copper Coupling (Socket) w/Tube Stop

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.01 USD
SKU: 1914
Weight: 0.16 lb(s)
Stock quantity: 59

1132. 1-1/4" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 0.73 USD
SKU: 1653
Weight: 0.15 lb(s)
Stock quantity: 80

1133. 1-1/4" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69

Price: 2.76 USD
SKU: 1638
Weight: 0.65 lb(s)
Stock quantity: 30

1134. 1-1/4" Copper Epoxy Coated Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 1.02 USD
SKU: 1637
Weight: 0.15 lb(s)
Stock quantity: 67

1135. 1-1/4" Copper Epoxy Coated Strut Clamp

Price: 1.20 USD
SKU: 1890
Weight: 0.16 lb(s)
Stock quantity: 115

1136. 1-1/4" Copper Slip Coupling (Socket)

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.46 USD
SKU: 1954
Weight: 0.16 lb(s)
Stock quantity: 25

1137. 1-1/4" Copper Two Hole Strap

Price: 0.32 USD
SKU: 1457
Weight: 0.08 lb(s)
Stock quantity: 118

1138. 1-1/4" Copper x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 6.25 USD
SKU: 4679
Weight: 0.60 lb(s)
Stock quantity: -3

1139. 1-1/4" Copper x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 4.79 USD
SKU: 2551
Weight: 0.60 lb(s)
Stock quantity: 73

1140. 1-1/4" Copper x 1-1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 10.84 USD
SKU: 4317
Weight: 0.60 lb(s)
Stock quantity: 0

1141. 1-1/4" Copper x 1-1/4" Cast Copper Union

Price: 19.80 USD
SKU: 1829
Weight: 0.68 lb(s)
Stock quantity: 17

1142. 1-1/4" Copper x 3/8" Wall Thickness 6 ft. Length Thermacell Insulation

Price: 3.88 USD
SKU: 3899
Weight: 0.07 lb(s)
Stock quantity: 33

1143. 1-1/4" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.69 USD
SKU: 2137
Weight: 0.34 lb(s)

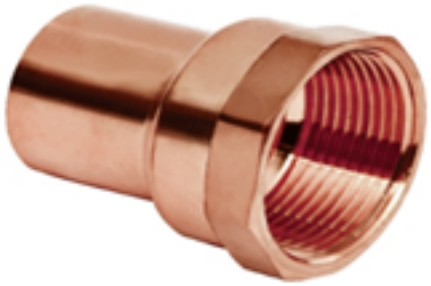

1144. 1-1/4" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.97 USD
SKU: 2161
Weight: 0.31 lb(s)

1145. 1-1/4" Die Cast Slip Joint Nut

Finish: Crome Plated

Price: 0.53 USD
SKU: 2457
Weight: 0.10 lb(s)
Stock quantity: 19

1146. 1-1/4" Fitting Brush w/ Wire Handle

Price: 2.10 USD
SKU: 1469
Weight: 0.08 lb(s)
Stock quantity: 40

1147. 1-1/4" Flexible Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 2.22 USD
SKU: 3504
Weight: 0.28 lb(s)
Stock quantity: 19

1148. 1-1/4" Float and Thermostatic Steam Trap

Price: 144.30 USD
SKU: 3469
Weight: 13.20 lb(s)
Stock quantity: 1

1149. 1-1/4" Flow Check Control Valve

Open automatically when the circulator starts running.Maximum operating pressure 125 PSIMaximum operating temperature 277° F

Price: 71.12 USD
SKU: 3479
Weight: 4.80 lb(s)

1150. 1-1/4" FTG x Copper 45° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.97 USD
SKU: 1999
Weight: 0.23 lb(s)

1151. 1-1/4" FTG x Copper 90° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.69 USD
SKU: 2023
Weight: 0.28 lb(s)

1152. 1-1/4" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.15 USD
SKU: 2868
Weight: 0.83 lb(s)
Stock quantity: 5

1153. 1-1/4" Galvanized 45° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.66 USD
SKU: 2905
Weight: 0.77 lb(s)
Stock quantity: 4

1154. 1-1/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.68 USD
SKU: 2841
Weight: 0.92 lb(s)
Stock quantity: 6

1155. 1-1/4" Galvanized 90° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.29 USD
SKU: 2893
Weight: 0.86 lb(s)
Stock quantity: 1

1156. 1-1/4" Galvanized Cap

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.76 USD
SKU: 2877
Weight: 0.48 lb(s)
Stock quantity: 6

1157. 1-1/4" Galvanized Clevis Hanger

Pipe Size: 1-1/4"Max. Rec. Load: 730 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 1.12 USD
SKU: 3625
Weight: 0.32 lb(s)
Stock quantity: 69

1158. 1-1/4" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.01 USD
SKU: 8
Weight: 0.69 lb(s)
Stock quantity: 5

1159. 1-1/4" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 2.61 USD

SKU: 8515

Weight: 1.10 lb(s)

Stock quantity: 233

1160. 1-1/4" Galvanized Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 1.19 USD
SKU: 1139
Weight: 0.22 lb(s)
Stock quantity: 143

1161. 1-1/4" Galvanized Strut Clamp

Price: 0.92 USD
SKU: 1421
Weight: 0.21 lb(s)
Stock quantity: 87

1162. 1-1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.64 USD
SKU: 2942
Weight: 1.11 lb(s)
Stock quantity: 8

1163. 1-1/4" Galvanized Two Hole Strap

Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.May be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4” X 1” tek type screwsApprovals: Underwriters Laboratories listed for US and Canada.

Price: 0.40 USD
SKU: 1681
Weight: 0.08 lb(s)
Stock quantity: 97

1164. 1-1/4" Galvanized Union

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.34 USD
SKU: 3168
Weight: 1.22 lb(s)
Stock quantity: 4

1165. 1-1/4" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 7.57 USD
SKU: 143
Weight: 1.50 lb(s)
Stock quantity: 0

1166. 1-1/4" Heavy-Duty, Professional Brush

Price: 6.55 USD
SKU: 8846
Weight: 0.30 lb(s)
Stock quantity: 0

1167. 1-1/4" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 14.38 USD
SKU: 2415
Weight: 1.31 lb(s)
Stock quantity: 36

1168. 1-1/4" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 14.30 USD
SKU: 7668
Weight: 1.31 lb(s)
Stock quantity: 45

1169. 1-1/4" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 33.75 USD
SKU: 2258
Weight: 1.31 lb(s)
Stock quantity: 19

1170. 1-1/4" IPS Brass Flange with Isolating Ball Valve

Price: 24.31 USD
SKU: 3836
Weight: 2.28 lb(s)
Stock quantity: 10

1171. 1-1/4" IPS Check Valve

Lead FreeCast brass swing check valve125 WSP, 200 WOGApproved By UPC, NSF

Price: 19.47 USD
SKU: 2726
Weight: 1.40 lb(s)
Stock quantity: 31

1172. 1-1/4" IPS Chrome Plated Shallow Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.53 USD
SKU: 2500
Weight: 0.03 lb(s)
Stock quantity: 74

1173. 1-1/4" IPS Chrome Plated Split Escutcheon

Chrome Plated FinishMade of Steel

Price: 1.20 USD
SKU: 678
Weight: 0.03 lb(s)
Stock quantity: 10

1174. 1-1/4" IPS Chrome Plated Steel Box Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.53 USD
SKU: 8404
Weight: 0.03 lb(s)
Stock quantity: 23

1175. 1-1/4" IPS Gate Valve

Pressure rating 200 psi wogTemperaure rating is 180°FCast brass constructionConforms to NSF / ANSI 372, AB 1953

Price: 26.64 USD
SKU: 2791
Weight: 1.60 lb(s)
Stock quantity: 13

1176. 1-1/4" IPS Plastic Escutcheon

Chrome Plated FinishMade of Plastic

Price: 2.03 USD
SKU: 5115
Weight: 0.03 lb(s)
Stock quantity: 46

1177. 1-1/4" IPS Spirovent w/Removable Vent Head

Price: 135.15 USD
SKU: 3118
Weight: 2.78 lb(s)
Stock quantity: 2

1178. 1-1/4" IPS Spring Loaded Check Valve

Lead FreeMaximum working pressure 200 psiCast brass spring check valve

Price: 21.87 USD
SKU: 4661
Weight: 1.30 lb(s)

1179. 1-1/4" Neo-Mold Slip Join T Washer

Price: 0.94 USD
SKU: 5363
Weight: 0.01 lb(s)
Stock quantity: 232

1180. 1-1/4" OD Chrome Plated Bell Escutcheon

Chrome Plated FinishMade of Steel

Price: 1.48 USD
SKU: 2374
Weight: 0.03 lb(s)
Stock quantity: 0

1181. 1-1/4" OD Chrome Plated Steel Box Escutcheon

Chrome Plated FinishMade of Steel

Price: 1.56 USD
SKU: 4793
Weight: 0.03 lb(s)
Stock quantity: 22

1182. 1-1/4" Plastic Two Hole Strap

Price: 0.99 USD
SKU: 3638
Weight: 0.02 lb(s)
Stock quantity: 145

1183. 1-1/4" PVC Check Valve (Solvent)

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 15.00 USD
SKU: 6045
Weight: 0.75 lb(s)

1184. 1-1/4" PVC Check Valve (Threaded)

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 15.00 USD
SKU: 50003
Weight: 0.75 lb(s)

1185. 1-1/4" PVC DWV 45° Elbow (HUB x HUB)

Sometimes called a "Street Eighth Bend".Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.80 USD
SKU: 980
Weight: 0.20 lb(s)
Stock quantity: 20

1186. 1-1/4" PVC DWV 90° Street Elbow (HUB x SPIGOT)

Sometimes called a "Street Quarter Bend". Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 3.13 USD
SKU: 972
Weight: 0.18 lb(s)
Stock quantity: 8

1187. 1-1/4" PVC DWV Female Adapter (HUB x FIP)

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.30 USD
SKU: 6085
Weight: 0.12 lb(s)
Stock quantity: 8

1188. 1-1/4" PVC DWV Male Adapter

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedSize range 1¼" to 4"

Price: 0.99 USD
SKU: 842
Weight: 0.10 lb(s)
Stock quantity: 6

1189. 1-1/4" PVC DWV Sanitary Tee (HUB x HUB x HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.60 USD
SKU: 891
Weight: 0.26 lb(s)
Stock quantity: 18

1190. 1-1/4" PVC Pressure Cap

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.84 USD
SKU: 3634
Weight: 0.83 lb(s)
Stock quantity: 10

1191. 1-1/4" SCH 40 PVC Ball Valve

Pressure rating is 150 psi at 73°FConnection Type: SolventProvides great strength and resistance to corrosion and chemicalsCompact and lightweight design

Price: 7.20 USD
SKU: 1211
Weight: 0.70 lb(s)
Stock quantity: 0

1192. 1-1/4" Slip Joint Washer

Price: 0.16 USD
SKU: 3498
Weight: 0.10 lb(s)
Stock quantity: 212

1193. 1-1/4" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 300 lbs.Pipe Size: 1-1/4"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69

Price: 0.50 USD

SKU: 1506

Weight: 0.11 lb(s)

Stock quantity: 356

1194. 1-1/4" Standard Length Spade Bit

Blue-Groove point and cutting edge for faster chip removal - 4x faster than standard spade bitsDouble cutting spurs scribe the outside of the hole reducing breakout10% larger shank for added durabilityGrooved hex shank prevents slipping in drill chuck or bit extensionFits all standard quick change chucks

Price: 9.18 USD
SKU: 4888
Weight: 0.50 lb(s)
Stock quantity: 10

1195. 1-1/4" Steam Angle Radiator Valve

Price: 19.88 USD
SKU: 2433
Weight: 2.00 lb(s)
Stock quantity: 1

1196. 1-1/4" Steam Convector Valve

Price: 20.38 USD
SKU: 2604
Weight: 2.16 lb(s)
Stock quantity: 6

1197. 1-1/4" Suspension Clamp

Price: 1.05 USD
SKU: 3292
Weight: 0.02 lb(s)
Stock quantity: 86

1198. 1-1/4" Sweat Ball Valve

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 14.28 USD
SKU: 2365
Weight: 1.59 lb(s)
Stock quantity: 10

1199. 1-1/4" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 22.93 USD
SKU: 7665
Weight: 1.59 lb(s)
Stock quantity: -10

1200. 1-1/4" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 33.75 USD
SKU: 6606
Weight: 1.59 lb(s)
Stock quantity: 24

1201. 1-1/4" Sweat Brass Flange

Price: 34.04 USD
SKU: 5212
Weight: 1.22 lb(s)
Stock quantity: 2

1202. 1-1/4" Sweat Brass Flange with Isolating Ball Valve

Price: 24.89 USD
SKU: 3550
Weight: 2.20 lb(s)
Stock quantity: 10

1203. 1-1/4" Sweat Check Valve

For installing on copper pipe using standard copper soldering methodArrow on the valve body shows direction of the flowSuitable for upright horizontal and vertical (arrow pointing upward) installations in plumbing and heating systems Pressure Ratings: 200 psi Non-Shock WOGConstruction: Lead-Free Brass Body

Price: 14.80 USD
SKU: 2719
Weight: 1.40 lb(s)
Stock quantity: 15

1204. 1-1/4" Sweat Gate Valve

Price: 26.64 USD
SKU: 2654
Weight: 1.60 lb(s)
Stock quantity: 16

1205. 1-1/4" Sweat Spirovent w/Removable Vent Head

Price: 135.30 USD
SKU: 321
Weight: 2.78 lb(s)
Stock quantity: 1

1206. 1-1/4" Test & Drain Valves

Female NPT Inlet and OutletRated 300 PSIRough Bras

Price: 123.97 USD
SKU: 4732
Weight: 2.90 lb(s)
Stock quantity: 5

1207. 1-1/4" x 3/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.94 USD
SKU: 3463
Weight: 0.38 lb(s)
Stock quantity: 15

1208. 1-1/4" x 1" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.16 USD
SKU: 38
Weight: 0.81 lb(s)
Stock quantity: 7

1209. 1-1/4" x 1" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.42 USD
SKU: 235
Weight: 0.33 lb(s)
Stock quantity: 30

1210. 1-1/4" x 1" Black Cast Iron Steam 90° Elbow (Imported)

Price: 5.75 USD
SKU: 1248
Weight: 1.32 lb(s)
Stock quantity: 4

1211. 1-1/4" x 1" Black Cast Iron Steam Coupling (Imported)

Price: 15.85 USD
SKU: 1386
Weight: 1.00 lb(s)
Stock quantity: 45

1212. 1-1/4" x 1" Black Cast Iron Steam Tee (Imported)

Price: 8.17 USD
SKU: 1144
Weight: 1.40 lb(s)
Stock quantity: 54

1213. 1-1/4" x 1" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 3.56 USD
SKU: 342
Weight: 0.63 lb(s)
Stock quantity: 37

1214. 1-1/4" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 5.17 USD
SKU: 120
Weight: 1.10 lb(s)
Stock quantity: 12

1215. 1-1/4" x 1" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 11.59 USD
SKU: 927
Weight: 0.91 lb(s)
Stock quantity: 3

1216. 1-1/4" x 1" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.66 USD
SKU: 1198
Weight: 0.43 lb(s)
Stock quantity: 3

1217. 1-1/4" x 1" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 14.44 USD
SKU: 1257
Weight: 0.78 lb(s)
Stock quantity: 8

1218. 1-1/4" x 1" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 15.28 USD
SKU: 1276
Weight: 1.23 lb(s)
Stock quantity: 2

1219. 1-1/4" x 1" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 10.00 USD
SKU: 2974
Weight: 0.38 lb(s)

1220. 1-1/4" x 1" Copper Reducer Coupling

Price: 2.59 USD
SKU: 1931
Weight: 0.23 lb(s)
Stock quantity: 28

1221. 1-1/4" x 1" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 11.55 USD
SKU: 3019
Weight: 0.25 lb(s)

1222. 1-1/4" x 1" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 7.26 USD
SKU: 2175
Weight: 0.28 lb(s)

1223. 1-1/4" x 1" FTG x C Copper Reducer Fitting Adapter

Price: 2.84 USD
SKU: 1963
Weight: 0.60 lb(s)
Stock quantity: 9

1224. 1-1/4" x 1" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.01 USD
SKU: 2844
Weight: 0.81 lb(s)
Stock quantity: 0

1225. 1-1/4" x 1" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.09 USD
SKU: 2796
Weight: 0.33 lb(s)
Stock quantity: 0

1226. 1-1/4" x 1" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.97 USD
SKU: 65
Weight: 0.63 lb(s)
Stock quantity: 4

1227. 1-1/4" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.02 USD
SKU: 33
Weight: 1.11 lb(s)
Stock quantity: 3

1228. 1-1/4" x 1" PVC DWV Reducer Coupling (HUB x HUB)

Price: 2.84 USD
SKU: 6051
Weight: 0.16 lb(s)
Stock quantity: 0

1229. 1-1/4" x 1" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.49 USD
SKU: 6029
Weight: 0.24 lb(s)
Stock quantity: 0

1230. 1-1/4" x 1" x 1" Black Cast Iron Steam Tee (Domestic)

Price: 8.68 USD
SKU: 6428
Weight: 1.40 lb(s)
Stock quantity: 36

1231. 1-1/4" x 1" x 1" Black Cast Iron Steam Tee (Imported)

Price: 7.71 USD
SKU: 1035
Weight: 1.40 lb(s)
Stock quantity: 52

1232. 1-1/4" x 1" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 4.51 USD
SKU: 316
Weight: 1.04 lb(s)
Stock quantity: 0

1233. 1-1/4" x 1" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 8.89 USD
SKU: 2060
Weight: 0.44 lb(s)

1234. 1-1/4" x 1" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.03 USD
SKU: 2949
Weight: 1.04 lb(s)
Stock quantity: 10

1235. 1-1/4" x 1" x 1/2" Black Cast Iron Steam Tee (Imported)

Price: 7.93 USD
SKU: 1252
Weight: 1.40 lb(s)
Stock quantity: 10

1236. 1-1/4" x 1" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 6.09 USD
SKU: 122
Weight: 0.81 lb(s)
Stock quantity: 2

1237. 1-1/4" x 1" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.09 USD
SKU: 2062
Weight: 0.34 lb(s)

1238. 1-1/4" x 1" x 1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.13 USD
SKU: 2947
Weight: 0.81 lb(s)
Stock quantity: 0

1239. 1-1/4" x 1" x 1-1/2" Black Cast Iron Steam Tee (Imported)

Price: 5.52 USD
SKU: 1092
Weight: 1.40 lb(s)
Stock quantity: 10

1240. 1-1/4" x 1" x 1-1/4" Black Cast Iron Steam Tee (Imported)

Price: 5.06 USD
SKU: 911
Weight: 1.00 lb(s)
Stock quantity: 33

1241. 1-1/4" x 1" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 6.71 USD
SKU: 86
Weight: 1.17 lb(s)
Stock quantity: 15

1242. 1-1/4" x 1" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.09 USD
SKU: 2059
Weight: 0.49 lb(s)

1243. 1-1/4" x 1" x 1-1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.20 USD
SKU: 2950
Weight: 1.17 lb(s)
Stock quantity: 0

1244. 1-1/4" x 1" x 3/4" Black Cast Iron Steam Tee (Imported)

Price: 4.60 USD
SKU: 1289
Weight: 1.40 lb(s)
Stock quantity: 29

1245. 1-1/4" x 1" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 7.13 USD
SKU: 87
Weight: 0.91 lb(s)
Stock quantity: 4

1246. 1-1/4" x 1" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 8.89 USD
SKU: 2061
Weight: 0.38 lb(s)

1247. 1-1/4" x 1" x 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.13 USD
SKU: 2948
Weight: 0.91 lb(s)
Stock quantity: 0

1248. 1-1/4" x 1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.58 USD
SKU: 242
Weight: 0.58 lb(s)
Stock quantity: 20

1249. 1-1/4" x 1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.00 USD
SKU: 358
Weight: 0.34 lb(s)
Stock quantity: 53

1250. 1-1/4" x 1/2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 3.84 USD
SKU: 1221
Weight: 1.32 lb(s)
Stock quantity: 5

1251. 1-1/4" x 1/2" Black Cast Iron Steam Coupling (Imported)

Price: 4.49 USD
SKU: 1104
Weight: 1.00 lb(s)
Stock quantity: 0

1252. 1-1/4" x 1/2" Black Cast Iron Steam Tee (Imported)

Price: 5.89 USD
SKU: 8160
Weight: 1.32 lb(s)
Stock quantity: 21

1253. 1-1/4" x 1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 2.82 USD
SKU: 4041
Weight: 0.52 lb(s)
Stock quantity: 21

1254. 1-1/4" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 5.94 USD
SKU: 81
Weight: 0.94 lb(s)
Stock quantity: 36

1255. 1-1/4" x 1/2" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 11.59 USD
SKU: 1355
Weight: 0.70 lb(s)

1256. 1-1/4" x 1/2" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 7.07 USD
SKU: 1196
Weight: 0.44 lb(s)
Stock quantity: 6

1257. 1-1/4" x 1/2" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 13.21 USD
SKU: 1255
Weight: 0.69 lb(s)
Stock quantity: 2

1258. 1-1/4" x 1/2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 15.28 USD
SKU: 1277
Weight: 1.06 lb(s)
Stock quantity: 0

1259. 1-1/4" x 1/2" Copper Reducer Coupling

Price: 2.67 USD
SKU: 1933
Weight: 0.19 lb(s)
Stock quantity: 19

1260. 1-1/4" x 1/2" FTG x C Copper Reducer Fitting Adapter

Price: 2.84 USD
SKU: 1965
Weight: 0.40 lb(s)
Stock quantity: 11

1261. 1-1/4" x 1/2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.69 USD
SKU: 2842
Weight: 0.59 lb(s)
Stock quantity: 2

1262. 1-1/4" x 1/2" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.29 USD
SKU: 4708
Weight: 0.34 lb(s)
Stock quantity: 0

1263. 1-1/4" x 1/2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.55 USD
SKU: 26
Weight: 0.52 lb(s)
Stock quantity: 3

1264. 1-1/4" x 1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standardsCertified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.46 USD
SKU: 5
Weight: 0.60 lb(s)
Stock quantity: 0

1265. 1-1/4" x 1/2" Steam Coupling (Domestic)

Price: 13.90 USD
SKU: 3910
Weight: 1.20 lb(s)
Stock quantity: 0

1266. 1-1/4" x 1/2" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 5.68 USD
SKU: 6071
Weight: 0.87 lb(s)
Stock quantity: 10

1267. 1-1/4" x 1/2" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.09 USD
SKU: 3535
Weight: 0.34 lb(s)

1268. 1-1/4" x 1/2" x 1-1/4" Black Cast Iron Steam Tee (Imported)

Price: 12.07 USD
SKU: 941
Weight: 1.40 lb(s)
Stock quantity: 35

1269. 1-1/4" x 1/2" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 9.72 USD
SKU: 312
Weight: 1.01 lb(s)
Stock quantity: 10

1270. 1-1/4" x 1/2" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.09 USD
SKU: 2066
Weight: 0.49 lb(s)

1271. 1-1/4" x 1/2" x 1-1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.13 USD
SKU: 2943
Weight: 1.01 lb(s)
Stock quantity: 2

1272. 1-1/4" x 1/2" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 6.38 USD
SKU: 6094
Weight: 0.72 lb(s)
Stock quantity: 10

1273. 1-1/4" x 1/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.60 USD
SKU: 233
Weight: 0.32 lb(s)
Stock quantity: 6

1274. 1-1/4" x 1/8" x 1-1/4" C x F x C Tee

C x F x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 24.65 USD
SKU: 1848
Weight: 0.56 lb(s)
Stock quantity: 0

1275. 1-1/4" x 10' SCH 40 Black Pipe

Price: 23.69 USD
SKU: 1086
Stock quantity: 185

1276. 1-1/4" x 10' SCH 40 Galvanized Pipe

Price: 25.50 USD
SKU: 5547
Stock quantity: 10

1277. 1-1/4" x 10' SCH 40 PVC DWV Pipe

Price: 8.09 USD
SKU: 1311
Stock quantity: 6

1278. 1-1/4" x 10' Type L Copper Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.55"

Price: 35.61 USD
SKU: 2191
Weight: 8.84 lb(s)
Stock quantity: 41

1279. 1-1/4" x 10" Copper M Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.042"

Price: 33.16 USD
SKU: 2195
Weight: 68.20 lb(s)
Stock quantity: 0

1280. 1-1/4" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 7.81 USD
SKU: 6084
Weight: 1.53 lb(s)
Stock quantity: 23

1281. 1-1/4" x 1-1/2" Black Cast Iron Steam Tee (Imported)

Price: 5.98 USD
SKU: 1161
Weight: 1.40 lb(s)
Stock quantity: 10

1282. 1-1/4" x 1-1/2" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 12.16 USD
SKU: 2147
Weight: 0.47 lb(s)

1283. 1-1/4" x 1-1/2" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 11.96 USD
SKU: 2174
Weight: 0.51 lb(s)
Stock quantity: 8

1284. 1-1/4" x 1-1/4" Closet Spud

Price: 7.12 USD
SKU: 3179
Weight: 0.50 lb(s)
Stock quantity: 2

1285. 1-1/4" x 1-1/4" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 6.91 USD
SKU: 2056
Weight: 0.46 lb(s)

1286. 1-1/4" x 1-1/4" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 6.91 USD
SKU: 2058
Weight: 0.35 lb(s)

1287. 1-1/4" x 1-1/4" x 1/2" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.43 USD
SKU: 2503
Weight: 0.49 lb(s)

1288. 1-1/4" x 1-1/4" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 14.65 USD
SKU: 2055
Weight: 0.92 lb(s)

1289. 1-1/4" x 1-1/4" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 6.91 USD
SKU: 2057
Weight: 0.41 lb(s)

1290. 1-1/4" x 1-1/4" x 3/4" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 15.02 USD
SKU: 3897
Weight: 0.55 lb(s)

1291. 1-1/4" x 12", 22 GA Chrome Plated Slip Elbow Bend

S/J connectComes w/2 nuts & 2 washersWith UPC bar codeFinish: Crome plated

Price: 6.63 USD
SKU: 2418
Weight: 0.36 lb(s)
Stock quantity: 44

1292. 1-1/4" x 12", 22 GA Crome Plated Slip Joint Extension Tube

S/J connectWith nuts & washersFinish: Crome plated

Price: 6.69 USD
SKU: 2434
Weight: 0.30 lb(s)
Stock quantity: 62

1293. 1-1/4" x 12", 22 GA Crome Plated Threaded Tube

Threaded both endsS/J connectFinish: Crome Plated

Price: 6.33 USD
SKU: 3224
Weight: 0.32 lb(s)
Stock quantity: 50

1294. 1-1/4" x 2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 5.04 USD
SKU: 1662
Weight: 0.33 lb(s)
Stock quantity: 24

1295. 1-1/4" x 2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.25 USD
SKU: 3234
Weight: 0.42 lb(s)
Stock quantity: 24

1296. 1-1/4" x 2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.40 USD
SKU: 542
Weight: 0.42 lb(s)
Stock quantity: 45

1297. 1-1/4" x 2-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 6.34 USD
SKU: 1663
Weight: 0.44 lb(s)
Stock quantity: 4

1298. 1-1/4" x 2-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.35 USD
SKU: 3243
Weight: 0.55 lb(s)
Stock quantity: 24

1299. 1-1/4" x 2-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.58 USD
SKU: 499
Weight: 0.55 lb(s)
Stock quantity: 33

1300. 1-1/4" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 6.40 USD
SKU: 1664
Weight: 0.55 lb(s)
Stock quantity: 21

1301. 1-1/4" x 3" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.35 USD
SKU: 3251
Weight: 0.65 lb(s)
Stock quantity: 22

1302. 1-1/4" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.56 USD
SKU: 480
Weight: 0.65 lb(s)
Stock quantity: 17

1303. 1-1/4" x 3/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.57 USD
SKU: 221
Weight: 0.38 lb(s)
Stock quantity: 111

1304. 1-1/4" x 3/4" Black Cast Iron Steam 90° Elbow (Imported)

Price: 4.94 USD
SKU: 1237
Weight: 1.32 lb(s)
Stock quantity: 12

1305. 1-1/4" x 3/4" Black Cast Iron Steam Tee (Imported)

Price: 4.55 USD
SKU: 1122
Weight: 1.40 lb(s)
Stock quantity: 33

1306. 1-1/4" x 3/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 4.18 USD
SKU: 173
Weight: 0.57 lb(s)
Stock quantity: 27

1307. 1-1/4" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 5.98 USD
SKU: 118
Weight: 1.00 lb(s)
Stock quantity: 27

1308. 1-1/4" x 3/4" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 11.59 USD
SKU: 1354
Weight: 0.50 lb(s)
Stock quantity: 2

1309. 1-1/4" x 3/4" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.66 USD
SKU: 1197
Weight: 0.48 lb(s)
Stock quantity: 21

1310. 1-1/4" x 3/4" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 15.93 USD
SKU: 1256
Weight: 0.63 lb(s)
Stock quantity: 10

1311. 1-1/4" x 3/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 15.28 USD
SKU: 1278
Weight: 1.23 lb(s)
Stock quantity: 1

1312. 1-1/4" x 3/4" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 11.30 USD
SKU: 2993
Weight: 0.35 lb(s)

1313. 1-1/4" x 3/4" Copper Reducer Coupling

Price: 2.59 USD
SKU: 1932
Weight: 0.17 lb(s)
Stock quantity: 11

1314. 1-1/4" x 3/4" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 11.75 USD
SKU: 2148
Weight: 0.29 lb(s)

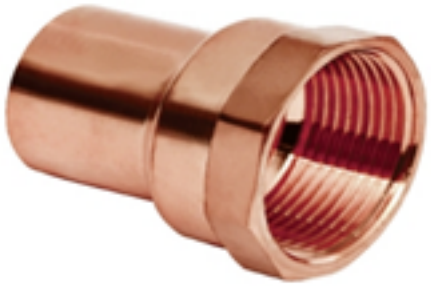

1315. 1-1/4" x 3/4" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 8.50 USD
SKU: 2176
Weight: 0.28 lb(s)

1316. 1-1/4" x 3/4" FTG x C Copper Reducer Fitting Adapter

Price: 2.84 USD
SKU: 3759
Weight: 0.30 lb(s)
Stock quantity: 24

1317. 1-1/4" x 3/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.62 USD
SKU: 2843
Weight: 0.68 lb(s)
Stock quantity: 2

1318. 1-1/4" x 3/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.09 USD
SKU: 4755
Weight: 0.38 lb(s)
Stock quantity: 0

1319. 1-1/4" x 3/4" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.97 USD
SKU: 36
Weight: 0.57 lb(s)
Stock quantity: 2

1320. 1-1/4" x 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.02 USD
SKU: 22
Weight: 1.01 lb(s)
Stock quantity: 5

1321. 1-1/4" x 3/4" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.49 USD
SKU: 6005
Weight: 0.24 lb(s)
Stock quantity: 5

1322. 1-1/4" x 3/4" Urinal Spudbath

Price: 6.01 USD
SKU: 1784
Weight: 0.50 lb(s)
Stock quantity: 2

1323. 1-1/4" x 3/4" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 4.97 USD
SKU: 310
Weight: 0.93 lb(s)
Stock quantity: 6

1324. 1-1/4" x 3/4" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.57 USD
SKU: 2064
Weight: 0.42 lb(s)

1325. 1-1/4" x 3/4" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.36 USD
SKU: 2945
Weight: 0.93 lb(s)
Stock quantity: 2

1326. 1-1/4" x 3/4" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.93 USD
SKU: 3053
Weight: 0.32 lb(s)

1327. 1-1/4" x 3/4" x 1-1/4" Black Cast Iron Steam Tee (Imported)

Price: 9.06 USD
SKU: 1239
Weight: 1.40 lb(s)
Stock quantity: 7

1328. 1-1/4" x 3/4" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 6.05 USD
SKU: 88
Weight: 1.05 lb(s)
Stock quantity: 21

1329. 1-1/4" x 3/4" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 8.89 USD
SKU: 2063
Weight: 0.49 lb(s)

1330. 1-1/4" x 3/4" x 1-1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.86 USD
SKU: 2946
Weight: 1.05 lb(s)
Stock quantity: 0

1331. 1-1/4" x 3/4" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 5.50 USD
SKU: 53
Weight: 0.80 lb(s)
Stock quantity: 1

1332. 1-1/4" x 3/4" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 8.89 USD
SKU: 2065
Weight: 0.39 lb(s)

1333. 1-1/4" x 3/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.20 USD
SKU: 347
Weight: 0.31 lb(s)
Stock quantity: 5

1334. 1-1/4" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 7.44 USD
SKU: 1665
Weight: 0.66 lb(s)
Stock quantity: 25

1335. 1-1/4" x 3-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.60 USD
SKU: 3227
Weight: 0.76 lb(s)
Stock quantity: 24

1336. 1-1/4" x 3-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.87 USD
SKU: 489
Weight: 0.79 lb(s)
Stock quantity: 21

1337. 1-1/4" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 8.47 USD
SKU: 1666
Weight: 0.77 lb(s)
Stock quantity: 5

1338. 1-1/4" x 4" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.60 USD
SKU: 3276
Weight: 0.92 lb(s)
Stock quantity: 23

1339. 1-1/4" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.79 USD
SKU: 490
Weight: 0.92 lb(s)
Stock quantity: 26

1340. 1-1/4" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 9.78 USD
SKU: 1667
Weight: 0.88 lb(s)
Stock quantity: 10

1341. 1-1/4" x 4-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.99 USD
SKU: 3670
Weight: 1.06 lb(s)
Stock quantity: 24

1342. 1-1/4" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.18 USD
SKU: 461
Weight: 1.06 lb(s)
Stock quantity: 49

1343. 1-1/4" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 10.48 USD
SKU: 1668
Weight: 0.99 lb(s)
Stock quantity: 0

1344. 1-1/4" x 5" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.99 USD
SKU: 3262
Weight: 1.18 lb(s)
Stock quantity: 24

1345. 1-1/4" x 5" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.24 USD
SKU: 462
Weight: 1.18 lb(s)
Stock quantity: 30

1346. 1-1/4" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 11.20 USD
SKU: 1669
Weight: 1.10 lb(s)
Stock quantity: 8

1347. 1-1/4" x 5-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.30 USD
SKU: 3387
Weight: 1.31 lb(s)
Stock quantity: 24

1348. 1-1/4" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.44 USD
SKU: 617
Weight: 1.31 lb(s)
Stock quantity: 46

1349. 1-1/4" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 12.56 USD
SKU: 1670
Weight: 1.21 lb(s)
Stock quantity: 19

1350. 1-1/4" x 6" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.30 USD
SKU: 3220
Weight: 1.43 lb(s)
Stock quantity: 24

1351. 1-1/4" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.46 USD
SKU: 618
Weight: 1.43 lb(s)
Stock quantity: 30

1352. 1-1/4" x 6", 22 GA Chrome Plated Waste Bend

S/J connectComes w/2 nuts & 2 washersFinish: Crome plated

Price: 4.29 USD
SKU: 3642
Weight: 0.24 lb(s)
Stock quantity: 50

1353. 1-1/4" x 8", 20 GA Grid Drain

Finish: Crome Plated

Price: 9.44 USD
SKU: 2624
Weight: 0.62 lb(s)
Stock quantity: 14

1354. 1-1/4" x 8", 22 GA Chrome Plated Waste Bend

S/J connectComes w/2 nuts & 2 washersFinish: Crome plated

Price: 5.01 USD
SKU: 2410
Weight: 0.24 lb(s)
Stock quantity: 75

1355. 1-1/4" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 4.96 USD
SKU: 1661
Weight: 0.25 lb(s)
Stock quantity: 69

1356. 1-1/4" x Close Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.15 USD
SKU: 2860
Weight: 0.31 lb(s)
Stock quantity: 24

1357. 1-1/4" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.48 USD
SKU: 539
Weight: 0.31 lb(s)
Stock quantity: 33

1358. 1-1/4", 22 GA Brass P-Trap w/o Cleanout

S/J connect with flangeFinish: Crome Plated

Price: 9.75 USD
SKU: 993
Weight: 0.56 lb(s)
Stock quantity: 1

1359. 1-1/4", 22 GA Crome Plated Double Offset

S/J connectWith nuts & washersFinish: Crome Plated

Price: 5.88 USD
SKU: 1824
Weight: 0.32 lb(s)
Stock quantity: 38

1360. 1-1/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 7.95 USD
SKU: 2648
Weight: 0.20 lb(s)
Stock quantity: 7

1361. 12 oz. Rust-Oleum Gloss Spray Paint

Weather and corrosion resistant coating protects exterior/interior surfaces like wood, metal, concrete, masonry and morOil-based formula provides a durable protective coating with excellent rust preventionDries to touch in 2 to 4 hours and covers up to 15 sq ftExcellent resistance to abrasion, fading and chippingGlossy finish provides a fresh shine to surfaces

Price: 6.02 USD
SKU: 4357
Weight: 0.96 lb(s)
Stock quantity: 10

1362. 12 oz. Spray Lubricant with Smart Straw WD-40

Loosens rusted parts, eliminates moisture and stops squeaksOil-based formulaStraw allows for precision stream or regular spray action to fit the jobSprays on clear

Price: 8.57 USD
SKU: 3293
Weight: 0.92 lb(s)
Stock quantity: 43

1363. 12 oz. Touch 'n Foam FireBreak Flame Resistant Sealant

Touch 'n Foam Fire Break is a flame-resistant all-purpose, Class A fire-retardant foam sealant that exceeds testing standardsFire Break is self-extinguishing and works by eliminating oxygen flow in service penetrations, where fire spreads most quicklyUsing Fire Break in these penetrations blocks air infiltration, which means fire will take longer to burn through to adjoining rooms, giving you valuable time to get to safetyPasses ASTM E-814 (modified), UL1715, and UL-94 V-OMeets ASTM E-84 Class A and UL tested

Price: 8.74 USD

SKU: 8462

Weight: 1.00 lb(s)

Stock quantity: 47

1364. 12 oz. Touch 'n Foam MAX Fill Expanding Foam Sealant

Stops household air infiltration by expanding to fill cracks where standard insulation is ineffectiveCreates an airtight weather-resistant bond that seals out drafts and blocks insect and pest intrusionFoam is tack-free in 30 minutesExpands approximately 3 times its original volumeExcess foam can be trimmed, sanded, caulked, or plastered in 1 hourUL classified

Price: 7.53 USD

SKU: 6627

Weight: 1.00 lb(s)

Stock quantity: 67

1365. 12" Aluminum Straight Pipe Wrench

Price: 49.67 USD
SKU: 4562
Weight: 2.40 lb(s)
Stock quantity: 1

1366. 12" Carbide Recip Blades for Thick Metal Cutting (3 Pack)

High performance carbide for greater durability and cutting performance in metals with a thickness from 3/16" to 9/16"Enhanced carbide tip to blade connection for extreme impact resistance1 in. oversized blade body for straighter cuts with less vibration

Price: 68.80 USD
SKU: 8662
Weight: 0.46 lb(s)
Stock quantity: 76

1367. 12" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 44.39 USD

SKU: 1565

Weight: 16.50 lb(s)

Stock quantity: 0

1368. 12" General Purpose Bi-Metal Reciprocating Saw Blade

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durability Patented T2™ Technology reduces cutting forces on each tooth and optimizes chip removal to allow efficient cutting in the widest range of materials

Price: 4.72 USD
SKU: 4459
Weight: 0.50 lb(s)
Stock quantity: 100

1369. 12" Husky Coupling (4000 Series)

Extra width for lateral supportAdditional sealing clamps for better load distribution and a more positive seal304 stainless steel heavy duty construction. Shield color coated orangeMeets ASTM C-1540 standard specification for Heavy Duty shielded couplings

Price: 85.46 USD
SKU: 8432
Weight: 4.00 lb(s)
Stock quantity: 0

1370. 12" PVC DWV 90° Elbow

Price: 0.00 USD
SKU:

1371. 12" Stainless Steel Braided Connector 3/8" Comp. x 1/2" IPS

Temperature rating: 40° to 140°F, intermittent to 180°F Pressure rating: 125 psi maximum IAPMO and CSA listed to ASME A112.18.6/CSA B125.6 Quick and easy installation- No special tools; no soldering No pipe bending- Flexible connectors simplify installation- even in cramped spaces

Price: 2.24 USD
SKU: 6481
Weight: 0.35 lb(s)
Stock quantity: 210

1372. 12" Stainless Steel Braided Toilet Connector 3/8" Comp. x 7/8" IPS

Brass BallcockTemperature rating: 40° to 140°F, intermittent to 180°FPressure rating: 125 psi maximum IAPMO and CSA listed to ASME A112.18.6/CSA B125.6

Price: 4.09 USD
SKU: 2810
Weight: 0.25 lb(s)
Stock quantity: 109

1373. 12" Wood Bi-Metal Reciprocating Saw Blade

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durabilityPatented T2™ Technology reduces cutting force on each tooth and optimizes chip removal to allow efficient cutting in the widest range of materialsPatented design for ultimate durability and speed when cutting clean wood or nail-embedded wood

Price: 4.39 USD
SKU: 3553
Weight: 0.50 lb(s)
Stock quantity: 247

1374. 12" x 24' Flue Pipe

Price: 14.18 USD
SKU: 3613
Stock quantity: 0

1375. 120 " Rubber Washing Machine Hose

For high pressure application Female x Female hose threadsAnti-corrosive couplingMeets IAPMO, CSA, ANSI, IEC 61770, and RMA standards

Price: 12.00 USD
SKU: 1701
Weight: 1.30 lb(s)
Stock quantity: 2

1376. 120,000 BTU Mascot FT Wall Mounted Heating Only Boiler

Model MFTHW120NA1XNNatural Gas & Propane Models95% Efficient (AFUE)Up to 10:1 ModulationVent up to 100 ft in PVC, CPVC & PolypropyleneEnvironmentally FriendlyLow NOx EmissionsIntegrated DHW Indirect TankSuperior DHW Performance on Combi Models

Price: 2032.62 USD

SKU: 8550

Weight: 102.00 lb(s)

Stock quantity: 0

1377. 120-Volt SDS Plus Hammer Drill TE 3-C

Triple-mode SDS Plus (TE-C) rotary hammer – for hammer drilling, rotary-only drilling and chiseling850W motor provides high performance and overload protectionQuick-change TE-C Click chuck and user-friendly selector switch for high working convenience360° side handle with quick-set depth gauge – easily adjustable for a firm grip in any position, even in tight spacesElectronic switch for precise hole-starting Hammer drilling diameter range: 3/16 - 1-1/8 inOptimum Hammer drilling range: 1/4 - 5/8 inHammer drilling RPM: 1300 rpmFull hammering frequency: 5160 impacts/minuteFunctionality: Reverse mode, Depth gaugeTriaxial vibration value for hammer drilling into concrete (ah,HD): 15.5 m/s² 1A-weighted emission sound pressure level: 92 dB (A) 2

Price: 321.30 USD

SKU: 8500

Weight: 6.60 lb(s)

Stock quantity: 0

1378. 120-Volt SDS Plus Hammer Drill TE 3-C Performance Package

Hammer drilling diameter range: 3/16 - 1-1/8 inOptimum Hammer drilling range: 1/4 - 5/8 inHammer drilling RPM: 1300 rpmFull hammering frequency: 5160 impacts/minuteFunctionality: Reverse mode, Depth gaugeTriaxial vibration value for hammer drilling into concrete (ah,HD): 15.5 m/s² 1A-weighted emission sound pressure level: 92 dB (A) 2

Price: 264.60 USD
SKU: 8495
Weight: 6.60 lb(s)
Stock quantity: 0

1379. 1-3/4" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 10.67 USD
SKU: 2672
Weight: 0.24 lb(s)
Stock quantity: 77

1380. 1-3/4" Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 10.91 USD
SKU: 8661
Weight: 0.34 lb(s)
Stock quantity: 15

1381. 1-3/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 7.83 USD
SKU: 2656
Weight: 0.20 lb(s)
Stock quantity: 20

1382. 14 oz. Fast Orange Cream Hand Cleaner

The #1 selling, biodegradable, waterless, petroleum solvent-free hand cleaner that contains no harsh chemicals, petroleum solvents or ammonia that can sting cuts or abrasions. Pure, fresh-smelling natural citrus power does the cleaning. Fortified with aloe, lanolin, glycerin, and other skin conditioners to soothe raw, rough hands. Fine Pumice deep cleans the toughest dirt. Works great on laundry stains (smooth lotion only), scuff marks, tile floors, pet odors and many other household cleaning needs.

Price: 3.47 USD
SKU: 8461
Weight: 1.00 lb(s)
Stock quantity: 8

1383. 14 oz. Sta Put Plumbers Putty

A plumbing sealing and caulking compound for setting plumbing fixtures, bowls, faucets, basin cocks, strainers, plugs, and sink frames.Will not stick to fingers or hands.Always the same smooth, uniform appearance from top to bottom of container with superior sealing qualities.Sta put will not harden, crumble, crack or shrink.It is flexible and stretchable, spreads easily, and can be molded into rings or shaped to the precise configuration needed. It provides a gas proof, fume proof, odor proof, insect proof and watertight seal.Meets Federal Specification TT-P-1536

Price: 2.26 USD

SKU: 1811

Weight: 0.94 lb(s)

Stock quantity: 46

1384. 14" Aluminum End Wrench

Price: 60.52 USD
SKU: 6351
Weight: 2.00 lb(s)
Stock quantity: 0

1385. 14" Aluminum Straight Pipe Wrench

Price: 71.50 USD
SKU: 5522
Weight: 2.40 lb(s)
Stock quantity: 1

1386. 14" Galvanized Riser Clamp

Price: 52.80 USD
SKU: 1584
Stock quantity: 0

1387. 14.1 oz. MAP-Pro Gas

Disposable, not for reuse.For use with all hand torches.Capacity - 14.1 oz.Pressure Gauge - 250 PSI.

Price: 8.99 USD
SKU: 1755
Weight: 1.76 lb(s)
Stock quantity: 149

1388. 140,000 BTU Mascot FT Wall Mounted Combination Boiler

Model MFTCW140NA1XNNatural Gas & Propane Models95% Efficient (AFUE)Up to 10:1 ModulationVent up to 100 ft in PVC, CPVC & PolypropyleneEnvironmentally FriendlyLow NOx EmissionsIntegrated DHW Indirect TankSuperior DHW Performance on Combi Models

Price: 2506.74 USD

SKU: 8532

Weight: 111.00 lb(s)

Stock quantity: 0

1389. 140,000 BTU Mascot FT Wall Mounted Heating Only Boiler

Model MFTHW140NA1XNNatural Gas & Propane Models95% Efficient (AFUE)Up to 10:1 ModulationVent up to 100 ft in PVC, CPVC & PolypropyleneEnvironmentally FriendlyLow NOx EmissionsIntegrated DHW Indirect TankSuperior DHW Performance on Combi Models

Price: 2032.62 USD

SKU: 8699

Weight: 102.00 lb(s)

Stock quantity: 1

1390. 15 psi Pressure Gauge

Price: 5.20 USD
SKU: 3847
Weight: 0.24 lb(s)
Stock quantity: 1

1391. 15 psi Pressure Gauge

Price: 10.18 USD
SKU: 4910
Weight: 0.50 lb(s)
Stock quantity: 2

1392. 15" Husky Coupling (4000 Series)

Extra width for lateral supportAdditional sealing clamps for better load distribution and a more positive seal304 stainless steel heavy duty construction. Shield color coated orangeMeets ASTM C-1540 standard specification for Heavy Duty shielded couplings

Price: 109.16 USD
SKU: 8433
Weight: 4.50 lb(s)
Stock quantity: 0

1393. 15" Single Basin Drop In Stainless Steel Bar Sink

Single basin design for maximum workspaceProduct is ADA compliant when properly installedSink is designed for drop-in installation to make the sink a focal point of your roomDesigned for everyday useSound-deadening pad minimizes sound and vibration for a quieter time at the sinkMounting clips placed inside the channel before installation mean less time under the sink for an easier install

Price: 35.65 USD
SKU: 4141
Weight: 10.00 lb(s)
Stock quantity: 5

1394. 1-5/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 8.77 USD
SKU: 4564
Weight: 0.22 lb(s)
Stock quantity: 1

1395. 1-5/8" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 19.67 USD
SKU: 8625
Weight: 0.34 lb(s)
Stock quantity: 4

1396. 16 oz. 1-Step PVC Cement (Blue)

Fast Set, One-Step CementNo Primer RequiredSuitable for All Weather ConditionsEffective on Wet or Dry PipeUse in Hot or Cold TemperaturesGreat for Flexible PVC PipeAllows for Immediate Pressure TestingEco-Friendly - Low VOC

Price: 12.80 USD
SKU: 8830
Weight: 1.40 lb(s)
Stock quantity: 0

1397. 16 oz. Clear Shower Pan Liner Adhesive

Formulated with a mixture of solvents and resinsDesigned for use with PVC flexible-liner membranesNot for use on PVC pipe and fittingsDo not use with chlorinated polyethylene (CPE) flexible-liner membraneIncludes an in-lid applicator

Price: 11.08 USD
SKU: 4038
Weight: 1.12 lb(s)
Stock quantity: 20

1398. 16 oz. CPVC,PVC Primer (Purple)

Meets California South Coast Air Quality Management District (SCAQMD) 1168/316A or BAAQMD Method 40 and various environmental requirementsRemoves surface dirt, grease and grime as well as softens the pipe surface to allow a fast, secure solvent weldFor use in areas where plumbing code calls for verification that a primer has been usedNSF listedMeets ASTM F-656

Price: 8.50 USD

SKU: 8652

Weight: 1.10 lb(s)

Stock quantity: 39

1399. 16 oz. Heavy-Duty Industrial Grade Thread Sealant with PTFE

#76005

Price: 17.30 USD
SKU: 8834
Weight: 2.00 lb(s)
Stock quantity: 0

1400. 16 oz. Megaloc Multi-Purpose Thread Sealant

Odorless formula is non-separating, non-flammable and non-hazardousSeals plastic and metal pipes and fittingsPerforms over a range from -50°F to 400°FSafe for drinking water linesIn-lid applicatorSets soft with no cure time requiredWipes clean from hands and tools and washes out of clothesResists hardening and cracksHydraulic resistant to 12,000 PSI

Price: 21.32 USD
SKU: 1793
Weight: 1.40 lb(s)
Stock quantity: 14

1401. 16 oz. Pipe Joint & Gasket Sealant

Non-separating, and will not harden or shrinkPerforms over a temperature range of minus 90 degrees to 450 degrees Fahrenheit (on steel pipe), 12,000 PSI (hydraulic) and 2600 PSI (gas)Safe for drinking water linesBrushableApplicator in lid

Price: 17.50 USD
SKU: 5835
Weight: 1.60 lb(s)
Stock quantity: 3

1402. 16 oz. PVC Cement

Meets ASTM D-2564 Listed by NSF International for use on potable water, sewer and drain, waste & vent systemsMost effective when used in temperature ranges from 40° F to 100° F

Price: 9.30 USD
SKU: 2625
Weight: 1.20 lb(s)
Stock quantity: 22

1403. 16 oz. PVC Primer (Clear)

Recommended method to soften and prepare surface of PVC pipe and fittings before applying solvent cements.Meets ASTM F656.

Price: 8.50 USD
SKU: 1821
Weight: 1.14 lb(s)
Stock quantity: 27

1404. 16 oz. Real-Tuff PTFE Paste Thread Sealant

Formula is non-flammable and contains no heavy metals or volatile solventsUse on all metals and on PVC, ABS, and CPVC plasticsSafe for drinking-water linesSuitable for use with all liquids and gases except for oxygenMaximum working hydraulic pressure of 12,000 PSIResists strong acids, alkalis and ketonesWithstands temperatures from -200 degrees Fahrenheit to 500 degrees FahrenheitHolds tight against expansion and contractionForms leak-free joints that can be used immediately

Price: 22.22 USD

SKU: 3666

Weight: 1.80 lb(s)

Stock quantity: 7

1405. 16 oz. Regular Paste Flux

Cleans and fluxes in one operation Low scorching Low spattering Multipurpose for use with 95/5, 60/40, 50/50, and 40/60 solder No odor Smooth consistency makes it easy to apply Special oil base protects the solder joint against corrosive attack Will not freeze or decomposeStandardsNSF/ANSI 61-G, O-F-506, Type 1A and A-A-51145, MIL-F-4995-2

Price: 12.51 USD
SKU: 2300
Weight: 1.14 lb(s)
Stock quantity: 19

1406. 16 oz. Soldering Paste

Smooth, premium quality, petroleum-based fluxFormulated for use in extreme climate temperatures all year longSelf-cleaning, lead-free formulaWill not lose its consistency in high or low temperaturesMeets Commercial Item Description A-A-51145 (supersedes Fed Spec O-F-506)

Price: 14.71 USD
SKU: 8647
Weight: 1.40 lb(s)
Stock quantity: 0

1407. 16 oz. Pro Dope Pipe Joint Compound

Designed for use with metal threaded pipeUse in pipe systems carrying water, natural gas, air, steam, ammonia, brine, diluted acids and alkalisSuitable for use in temperatures ranging from 0 degrees Fahrenheit to 350 degrees FahrenheitPrevents rust and corrosionWithstands air and steam pressure up to 200 PSIDo not use for LP gas lines or on plastic pipeWipes clean from handsWill not leak or drip out of the containerResists hardening and cracking

Price: 7.53 USD

SKU: 1819

Weight: 1.80 lb(s)

Stock quantity: 16

1408. 17 GA, Trip Lever Bath Drain

Patented pre-adjustable linkageHeavy duty cast red brass head, tee and shoeCast brass shoe plugExtra long plunger strokeLubricated cast brass plungerChrome plated stamped brass domed strainerHeavy duty, highly polished face plateCast red brass coupling nuts supplied with 17 Gauge TubingPartially assembled in cartonModel G0041813

Price: 97.88 USD
SKU: 1865
Weight: 6.53 lb(s)
Stock quantity: 0

1409. 17" Single Bowl Top Mount Stainless Steel Sink

Sound-deadening pad(s) minimizes sound and vibration for a quieter time at the sinkMounting clips placed inside the channel before installation mean less time under the sink for an easier installStraight sidewalls give the sink a flat bottom and offer more usable space for stacking, soaking and washing dishes; easy to clean

Price: 43.50 USD
SKU: 2470
Weight: 10.00 lb(s)
Stock quantity: 1

1410. 1-7/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 10.76 USD
SKU: 4174
Weight: 0.24 lb(s)
Stock quantity: 2

1411. 1-7/8" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 21.09 USD
SKU: 8626
Weight: 0.35 lb(s)
Stock quantity: 2

1412. 18" Aluminum End Wrench

Price: 80.60 USD
SKU: 6355
Weight: 3.00 lb(s)
Stock quantity: 2

1413. 199,000 BTU Mascot FT Wall Mounted Combination Boiler

Model MFTCW199NA1XNNatural Gas & Propane Models95% Efficient (AFUE)Up to 10:1 ModulationVent up to 100 ft in PVC, CPVC & PolypropyleneEnvironmentally FriendlyLow NOx EmissionsIntegrated DHW Indirect TankSuperior DHW Performance on Combi Models

Price: 2757.09 USD

SKU: 8529

Weight: 130.00 lb(s)

Stock quantity: 1

1414. 199,000 BTU Mascot FT Wall Mounted Heating Only Boiler

Model MFTHW199NA1XN95% Efficient (AFUE)Up to 10:1 ModulationVent up to 100 ft in PVC, CPVC & PolypropyleneEnvironmentally FriendlyLow NOx EmissionsIntegrated DHW Indirect TankSuperior DHW Performance on Combi Models

Price: 2327.31 USD

SKU: 8528

Weight: 118.00 lb(s)

Stock quantity: 0

1415. 1lbs Brazing Rod 5% Silver (28 Sticks)

Price: 64.00 USD
SKU: 3140
Weight: 1.05 lb(s)
Stock quantity: 2

1416. 2 HP Sewage Pump (LEH200-Series, Model LEH202M2-2)

Rugged 2 vane, closed cast iron impellers Cast iron housing and volute with all stainless fasteners 303 stainless steel rotor shaft Oil-filled, hermetically sealed motors Built-in thermal protection on single phase models 2" or 3" flanged discharge Permanently lubricated upper and lower ball bearings Dual shaft seals Quick-connect 25' standard power cord allows replacement of cord in seconds without breaking seals to motorMaximum fluid temperature 140˚F

Price: 1132.50 USD

SKU: 8595

Weight: 95.00 lb(s)

Stock quantity: 0

1417. 2 lbs. Duck Butter Pipe Joint Lubricant

Use on PW, DWV and sewer systemsCompatible with copper pipeClean, odorless, non-stainingAdheres to wet and dry surfaces, preventing needless overuse of lubricantCertified to ANSI/NSF 61Dissolves in hot water

Price: 8.41 USD
SKU: 3095
Weight: 2.30 lb(s)
Stock quantity: 6

1418. 2 oz. Tube Heavy-Duty Industrial Grade Thread Sealant

#76007

Price: 3.07 USD
SKU: 8836
Weight: 0.20 lb(s)
Stock quantity: 0

1419. 2" Copper x 1-1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 13.21 USD
SKU: 4129
Weight: 0.55 lb(s)
Stock quantity: 0

1420. 2" No Hub Cast Iron Double 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 15.99 USD
SKU: 7596
Weight: 4.50 lb(s)
Stock quantity: 10

1421. 2" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 10.76 USD
SKU: 3339
Weight: 0.44 lb(s)
Stock quantity: -2

1422. 2" Black 45° Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.56 USD
SKU: 77
Weight: 1.69 lb(s)
Stock quantity: 15

1423. 2" Black 45° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 12.28 USD
SKU: 91
Weight: 1.60 lb(s)
Stock quantity: 12

1424. 2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 7.92 USD
SKU: 278
Weight: 1.98 lb(s)
Stock quantity: 47

1425. 2" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 7.04 USD
SKU: 3760
Weight: 1.98 lb(s)
Stock quantity: 4

1426. 2" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 4.22 USD
SKU: 401
Weight: 0.94 lb(s)
Stock quantity: 8

1427. 2" Black Cast Iron Steam 45° Elbow (Imported)

Price: 10.58 USD
SKU: 1238
Weight: 3.70 lb(s)
Stock quantity: 7

1428. 2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 9.78 USD
SKU: 1314
Weight: 3.70 lb(s)
Stock quantity: 35

1429. 2" Black Cast Iron Steam Tee (Imported)

Price: 15.51 USD
SKU: 1008
Weight: 3.78 lb(s)
Stock quantity: 8

1430. 2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 6.29 USD
SKU: 330
Weight: 1.44 lb(s)
Stock quantity: 17

1431. 2" Black Cross Tee

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 18.95 USD
SKU: 3466
Weight: 3.16 lb(s)
Stock quantity: 1

1432. 2" Black Extension

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 11.92 USD
SKU: 8285
Weight: 1.05 lb(s)
Stock quantity: 2

1433. 2" Black Floor Flange

Floor flange is used to secure pipe to wall or floor mounts for DIY (do-it-yourself) applicationsMeets in ASTM and ANSI standards

Price: 10.34 USD
SKU: 3629
Weight: 1.69 lb(s)
Stock quantity: 0

1434. 2" Black Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 2.53 USD
SKU: 381
Weight: 0.68 lb(s)
Stock quantity: 15

1435. 2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 9.90 USD
SKU: 56
Weight: 2.20 lb(s)
Stock quantity: 17

1436. 2" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 14.80 USD
SKU: 219
Weight: 2.29 lb(s)
Stock quantity: 15

1437. 2" Brass 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 22.12 USD
SKU: 1170
Weight: 1.80 lb(s)
Stock quantity: 5

1438. 2" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 25.99 USD
SKU: 1155
Weight: 2.10 lb(s)
Stock quantity: 5

1439. 2" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 17.05 USD
SKU: 1117
Weight: 1.10 lb(s)
Stock quantity: 5

1440. 2" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 19.27 USD
SKU: 1131
Weight: 1.56 lb(s)
Stock quantity: 5

1441. 2" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 12.32 USD
SKU: 1415
Weight: 0.78 lb(s)
Stock quantity: 5

1442. 2" Brass Street 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 29.35 USD
SKU: 1430
Weight: 2.00 lb(s)
Stock quantity: 0

1443. 2" Brass Street 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 30.24 USD
SKU: 1443
Weight: 1.70 lb(s)
Stock quantity: 2

1444. 2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 27.84 USD
SKU: 1467
Weight: 2.71 lb(s)
Stock quantity: 3

1445. 2" Brass Union

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 42.88 USD
SKU: 1481
Weight: 2.40 lb(s)
Stock quantity: 5

1446. 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 14.93 USD
SKU: 2034
Weight: 1.34 lb(s)
Stock quantity: 15

1447. 2" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 21.85 USD
SKU: 8627
Weight: 0.40 lb(s)
Stock quantity: 28

1448. 2" Copper 45° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 7.92 USD
SKU: 1992
Weight: 0.70 lb(s)

1449. 2" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 8.71 USD
SKU: 2009
Weight: 0.79 lb(s)

1450. 2" Copper Caps

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.27 USD
SKU: 1871
Weight: 0.30 lb(s)

1451. 2" Copper Coupling (Socket) w/Tube Stop

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.39 USD
SKU: 1916
Weight: 0.40 lb(s)
Stock quantity: 59

1452. 2" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 1.35 USD
SKU: 1323
Weight: 0.24 lb(s)
Stock quantity: 164

1453. 2" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69

Price: 3.63 USD
SKU: 1673
Weight: 0.98 lb(s)
Stock quantity: 83

1454. 2" Copper Epoxy Coated Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 1.50 USD
SKU: 1672
Weight: 0.25 lb(s)
Stock quantity: 35

1455. 2" Copper Epoxy Coated Strut Clamp

Price: 1.83 USD
SKU: 1921
Weight: 0.29 lb(s)
Stock quantity: 118

1456. 2" Copper Slip Coupling (Socket)

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.59 USD
SKU: 1956
Weight: 0.60 lb(s)
Stock quantity: 8

1457. 2" Copper Two Hole Strap

Price: 0.28 USD
SKU: 1490
Weight: 0.13 lb(s)
Stock quantity: 87

1458. 2" Copper x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 7.57 USD
SKU: 2559
Weight: 0.55 lb(s)
Stock quantity: 0

1459. 2" Copper x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 6.25 USD
SKU: 2511
Weight: 0.55 lb(s)
Stock quantity: 35

1460. 2" Copper x 2" Cast Copper Union

Price: 48.12 USD
SKU: 1831
Weight: 1.62 lb(s)
Stock quantity: 14

1461. 2" Copper x 2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 18.65 USD
SKU: 2582
Weight: 0.55 lb(s)
Stock quantity: 0

1462. 2" Copper x 3/8" Wall Thickness 6 ft. Length Thermacell Insulation

Price: 5.78 USD
SKU: 3911
Weight: 0.24 lb(s)
Stock quantity: 4

1463. 2" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 12.08 USD
SKU: 2139
Weight: 0.72 lb(s)

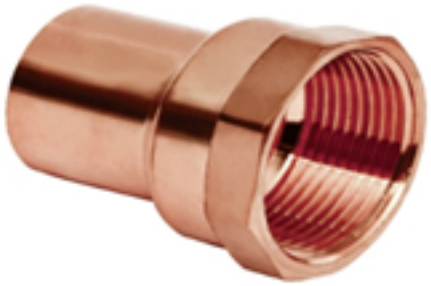

1464. 2" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.62 USD
SKU: 2163
Weight: 0.70 lb(s)

1465. 2" Double Check Valve (007-M1DCDA)

Lead FreeMaximum working pressure 175 psiTemperature range 32°F to 140°FCompact design for easy installation in tight places Single cover, top-entry design allows for convenient access for maintenance

Price: 2335.50 USD
SKU: 8425
Weight: 30.00 lb(s)
Stock quantity: 0

1466. 2" Double Check Valve (U007M1-QT)

Top entryReplaceable seats and seat discsBronze body for durabilityMaximum working pressure 175 psiTemperature range 33°F to 180°FMeets in ASSE Std. 1015, AWWA Std. C510 IAPMO PS31, CSA B64.5 StandardsInquire with governing authorities for local installation requirements

Price: 323.43 USD

SKU: 3862

Weight: 25.70 lb(s)

Stock quantity: 0

1467. 2" EJECTOR Check Valve

Full 2" flow design - meets BOCA (P.604.2)2" Full Flow Pump CodeChecks backflow of water and sewer gasSimple to install (no threading of pipe required)Neoprene gasket and flapper, weighted with heavy stainless steel metal backing plates and stainless steel rivetCan be installed on vertical or horizontal lineSlips over ABS, PVC, steel pipe or copper pipingReduces motor and pump noise from plumbing systemMeets requirements of Wisconsin Uniform Plumbing CodeFlexible neoprene slip x slip union includes stainless steel clamps for low pressure systems. Avoid more than 10' (3 m) static head above the check valve. 4.3 PSI at 130 °F (54 °C).Stainless steel screwsExtra wide hinge to reduce hinge stress6 per carton

Price: 15.30 USD

SKU: 3193

Weight: 3.00 lb(s)

1468. 2" Fitting Brush w/ Wire Handle

Price: 3.15 USD
SKU: 1495
Weight: 0.67 lb(s)
Stock quantity: 41

1469. 2" Flexible Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 2.73 USD
SKU: 3060
Weight: 0.34 lb(s)
Stock quantity: 17

1470. 2" Flexible Pipe Cap

Rated for undergroundFlexes with ground movement Flexible Connectors are leak-proof, rot-proof and sealed against infiltration and exfiltrationConforms to CSA B602, certified and UPC approved

Price: 2.30 USD
SKU: 2674
Weight: 0.20 lb(s)
Stock quantity: 31

1471. 2" Float and Thermostatic Steam Trap

Price: 310.50 USD
SKU: 3476
Weight: 24.20 lb(s)
Stock quantity: 1

1472. 2" Flow Check Control Valve

Open automatically when the circulator starts running.Maximum operating pressure 125 PSIMaximum operating temperature 277° F

Price: 137.48 USD
SKU: 3174
Weight: 10.30 lb(s)

1473. 2" FTG x Copper 45° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.41 USD
SKU: 2001
Weight: 0.68 lb(s)

1474. 2" FTG x Copper 90° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 13.04 USD
SKU: 2025
Weight: 0.84 lb(s)

1475. 2" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.44 USD
SKU: 2870
Weight: 1.70 lb(s)
Stock quantity: 5

1476. 2" Galvanized 45° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 12.27 USD
SKU: 2907
Weight: 1.60 lb(s)
Stock quantity: 4

1477. 2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.13 USD
SKU: 2850
Weight: 1.97 lb(s)
Stock quantity: 20

1478. 2" Galvanized 90° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 10.37 USD
SKU: 2896
Weight: 1.98 lb(s)
Stock quantity: 7

1479. 2" Galvanized Cap

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.70 USD
SKU: 2879
Weight: 0.94 lb(s)
Stock quantity: 8

1480. 2" Galvanized Clevis Hanger

Pipe Size: 2"Max. Rec. Load: 730 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 1.24 USD
SKU: 3787
Weight: 0.52 lb(s)
Stock quantity: 193

1481. 2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.28 USD
SKU: 3029
Weight: 1.44 lb(s)
Stock quantity: 20

1482. 2" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 3.12 USD
SKU: 8441
Weight: 1.20 lb(s)
Stock quantity: 457

1483. 2" Galvanized Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 2.01 USD
SKU: 1176
Weight: 0.44 lb(s)
Stock quantity: 85

1484. 2" Galvanized Strut Clamp

Price: 1.07 USD
SKU: 1459
Weight: 0.35 lb(s)
Stock quantity: 9

1485. 2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 9.54 USD
SKU: 2968
Weight: 2.59 lb(s)
Stock quantity: 5

1486. 2" Galvanized Two Hole Strap

Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.May be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4” X 1” tek type screwsApprovals: Underwriters Laboratories listed for US and Canada.

Price: 0.59 USD
SKU: 1714
Weight: 0.13 lb(s)
Stock quantity: 203

1487. 2" Galvanized Union

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 15.82 USD
SKU: 3170
Weight: 2.29 lb(s)
Stock quantity: 4

1488. 2" Grooved Butterfly Control Valve

Approvals:UL, ULC, FM Factory installed UL Listed and FM Approved Double Tamper Switch for indoor and outdoor use

Price: 217.89 USD
SKU: 762
Weight: 5.07 lb(s)
Stock quantity: 1

1489. 2" Grooved Butterfly Valve

300 PSIMaximum Working Temperature 200° F

Price: 203.20 USD
SKU: 134
Weight: 7.00 lb(s)
Stock quantity: 0

1490. 2" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 4.91 USD
SKU: 279
Weight: 1.90 lb(s)
Stock quantity: 118

1491. 2" Grooved Split Flange

Made of durable, high-strength ductile iron comforming to ASTM A536

Price: 16.46 USD
SKU: 4220
Weight: 4.20 lb(s)
Stock quantity: 4

1492. 2" Heavy-Duty, Professional Brush

Price: 8.09 USD
SKU: 8848
Weight: 0.30 lb(s)
Stock quantity: 0

1493. 2" Husky Coupling (4000 Series)

Extra width for lateral supportAdditional sealing clamps for better load distribution and a more positive seal304 stainless steel heavy duty construction. Shield color coated orangeMeets ASTM C-1540 standard specification for Heavy Duty shielded couplings

Price: 8.75 USD
SKU: 4203
Weight: 0.60 lb(s)
Stock quantity: 66

1494. 2" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 27.86 USD
SKU: 2423
Weight: 2.99 lb(s)
Stock quantity: 14

1495. 2" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 31.60 USD
SKU: 7670
Weight: 2.99 lb(s)
Stock quantity: 2

1496. 2" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 51.30 USD
SKU: 2431
Weight: 2.99 lb(s)
Stock quantity: 20

1497. 2" IPS Brass Flange

Price: 57.00 USD
SKU: 3869
Weight: 2.38 lb(s)
Stock quantity: 0

1498. 2" IPS Brass Flange with Isolating Ball Valve

Price: 43.20 USD
SKU: 6485
Weight: 4.05 lb(s)
Stock quantity: 0

1499. 2" IPS Chrome Plated Shallow Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.94 USD
SKU: 2691
Weight: 0.03 lb(s)
Stock quantity: 73

1500. 2" IPS Chrome Plated Split Escutcheon

Chrome Plated FinishMade of Steel

Price: 1.43 USD
SKU: 4447
Weight: 0.03 lb(s)
Stock quantity: 45

1501. 2" IPS Gate Valve

Pressure rating 200 psi wogTemperaure rating is 180°FCast brass constructionConforms to NSF / ANSI 372, AB 1953

Price: 45.78 USD
SKU: 2446
Weight: 3.30 lb(s)
Stock quantity: 6

1502. 2" IPS OS&Y Valve

Price: 199.07 USD
SKU: 1851
Weight: 50.00 lb(s)
Stock quantity: 2

1503. 2" IPS Plastic Escutcheon

Chrome Plated FinishMade of Plastic

Price: 2.09 USD
SKU: 4973
Weight: 0.03 lb(s)
Stock quantity: 27

1504. 2" IPS Spring Loaded Check Valve

Lead FreeMaximum working pressure 200 psiCast Brass spring check valve

Price: 62.26 USD
SKU: 4749
Weight: 3.10 lb(s)

1505. 2" IPS Swing Check Valve

Lead FreeCast Brass swing check valve125 WSP, 200 WOGApproved By UPC, NSF

Price: 38.56 USD
SKU: 2733
Weight: 2.64 lb(s)

1506. 2" IPS x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 7.57 USD
SKU: 3448
Weight: 0.55 lb(s)
Stock quantity: 0

1507. 2" IPS x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 6.25 USD
SKU: 2981
Weight: 0.55 lb(s)
Stock quantity: 13

1508. 2" IPS x 1-1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 13.76 USD
SKU: 4495
Weight: 0.55 lb(s)
Stock quantity: 0

1509. 2" IPS x 2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 19.81 USD
SKU: 4323
Weight: 0.55 lb(s)
Stock quantity: 0

1510. 2" No Hub Floor Drain

Pressure rating: maximum 4.3 PSI Temperature rating: minimum 32°F, maximum 212°FHigh resistance to both corrosion and abrasion

Price: 10.26 USD
SKU: 684
Weight: 3.00 lb(s)
Stock quantity: 8

1511. 2" No Hub Adjustable Floor Drain

Cast iron threaded adjustable adaptor Round polished bronze

Price: 179.07 USD
SKU: 5268
Weight: 4.00 lb(s)
Stock quantity: 1

1512. 2" No Hub Adjustable Shower Drain w/ Square Top

High resistance to both corrosion and abrasion

Price: 34.51 USD
SKU: 4988
Weight: 5.30 lb(s)
Stock quantity: 10

1513. 2" No Hub Cast Iron 1/16 Bend

Cast-iron constructionMinimum service temperature 32°F and Maximum 212°FIAPMO certified and NSF listed Excellent sound-deadening qualitiesWithout a hubNot intended for pressure use

Price: 6.23 USD
SKU: 6623
Weight: 1.43 lb(s)
Stock quantity: 29

1514. 2" No Hub Cast Iron 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 3.94 USD
SKU: 6421
Weight: 2.20 lb(s)
Stock quantity: -8

1515. 2" No Hub Cast Iron 1/8 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 3.24 USD
SKU: 6424
Weight: 1.50 lb(s)
Stock quantity: 111

1516. 2" No Hub Cast Iron Blind Cap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 3.59 USD
SKU: 7509
Weight: 0.70 lb(s)
Stock quantity: 31

1517. 2" No Hub Cast Iron Cleanout Ferrule with Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 14.32 USD
SKU: 7597
Weight: 1.06 lb(s)
Stock quantity: 0

1518. 2" No Hub Cast Iron Cleanout Tee With Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 16.42 USD
SKU: 7510
Weight: 3.27 lb(s)
Stock quantity: 11

1519. 2" No Hub Cast Iron Double Sanitary Tap Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 17.57 USD
SKU: 7629
Weight: 5.30 lb(s)
Stock quantity: 8

1520. 2" No Hub Cast Iron Double Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 15.20 USD
SKU: 7594
Weight: 5.02 lb(s)
Stock quantity: 7

1521. 2" No Hub Cast Iron Double Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 14.32 USD
SKU: 7595
Weight: 4.48 lb(s)
Stock quantity: 3

1522. 2" No Hub Cast Iron Long Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 15.43 USD
SKU: 7511
Weight: 5.80 lb(s)
Stock quantity: 0

1523. 2" No Hub Cast Iron P-Trap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 7.71 USD
SKU: 6446
Weight: 4.70 lb(s)
Stock quantity: 18

1524. 2" No Hub Cast Iron Sanitary Tap Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 12.24 USD
SKU: 6431
Weight: 3.00 lb(s)
Stock quantity: 18

1525. 2" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 4.96 USD
SKU: 6437
Weight: 2.80 lb(s)
Stock quantity: 33

1526. 2" No Hub Cast Iron Short Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 6.52 USD
SKU: 7512
Weight: 3.10 lb(s)
Stock quantity: 7

1527. 2" No Hub Cast Iron Tap 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 12.06 USD
SKU: 7514
Weight: 2.00 lb(s)
Stock quantity: 39

1528. 2" No Hub Cast Iron Upright Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 15.81 USD
SKU: 7624
Weight: 4.80 lb(s)
Stock quantity: 0

1529. 2" No Hub Cast Iron Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 4.77 USD
SKU: 6441
Weight: 3.25 lb(s)
Stock quantity: 20

1530. 2" No Hub Heavy Duty Coupling

Standard couplings shall conform to the requirements contained in the latest edition of ASTM C1540Shield assembly, clamp, band, and screw housing shall be made from series 301 stainless steel, and the screw made from series 304 stainless steelGaskets shall comply with requirements contained in the latest edition of ASTM C564

Price: 5.63 USD
SKU: 817
Weight: 0.50 lb(s)
Stock quantity: 153

1531. 2" No-Hub Coupling

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certified Couplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310 Neoprene rubber gasket meets/exceeds ASTM C 564 Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 2.07 USD
SKU: 811
Weight: 0.27 lb(s)
Stock quantity: 1123

1532. 2" NPT Male LEGIOMIX® Electronic Mixing Valve

Adjustment temperature range: 70˚ - 185˚FDisinfection temperature range: 100˚ - 185˚FMax body pressure rating (static): 230 psiMax operating pressure: 150 psiMax inlet temperature: 212˚FProtection class: IP 54 (controller)Standards: ASSE 1017, CSA B15.3, NSF/ANSI 372 - 2016, Drinking Water System Components - Lead Content, Reduction of Lead in Drinking Water Act, California Health and Safety Code 116875, S.3874, Reduction of Lead in Drinking Water A600094A Model

Price: 2240.00 USD
SKU: 8700
Weight: 22.00 lb(s)
Stock quantity: 1

1533. 2" PLUS™ 2004 Adjustable Flapper

The Flapper features an adjustable float to help control flush volumeSimply slide the adjustable float up for water savings or down for increased flush volumeThe exclusive longest lasting red rubber resists chlorine, bacteria, city water treatment, hard water, and well waterThe adjustable flapper fits most toilets, including Kohler, Glacier Bay, and American Standard models Made of flexible rubber for a tight seal and easy to install, the 2004 toilet parts include: (1) Adjustable Toilet Flapper and (1) Stainless Steel Chain

Price: 8.72 USD

SKU: 5063

Weight: 0.40 lb(s)

Stock quantity: 127

1534. 2" PVC Ball/Check Valve Combo with Union

Ball/check combo provides compact designHeavy-duty PVC125 PSI ratedVertical or horizontal installation

Price: 31.49 USD
SKU: 8453
Weight: 2.00 lb(s)
Stock quantity: 5

1535. 2" PVC Check Valve

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 23.00 USD
SKU: 3080
Weight: 1.00 lb(s)

1536. 2" PVC DWV 45° Elbow (HUB x HUB)

Sometimes called a "Street Eighth Bend".Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.42 USD
SKU: 6508
Weight: 0.32 lb(s)
Stock quantity: 58

1537. 2" PVC DWV 45° Street Elbow (HUB x SPIGOT)

Sometimes called a "Street Eighth Bend".Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.19 USD
SKU: 6521
Weight: 0.31 lb(s)
Stock quantity: 122

1538. 2" PVC DWV 90° Elbow

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.26 USD
SKU: 6531
Weight: 0.46 lb(s)
Stock quantity: 18

1539. 2" PVC DWV 90° Street Elbow (HUB x SPIGOT)

Sometimes called a "Street Quarter Bend". Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.49 USD
SKU: 986
Weight: 0.40 lb(s)
Stock quantity: 80

1540. 2" PVC DWV Adjustable P-Trap w/Union

Maximum service temperature 140°FMaximum working pressure of 5 psiDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 7.20 USD
SKU: 3049
Weight: 0.80 lb(s)
Stock quantity: 13

1541. 2" PVC DWV Cap (HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 2.45 USD
SKU: 819
Weight: 0.12 lb(s)
Stock quantity: 13

1542. 2" PVC DWV Coupling

Maximum service temperature 140°FDo not test or use with compressed air or other gasesHub x hub connectionsASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.56 USD
SKU: 976
Weight: 0.15 lb(s)
Stock quantity: 21

1543. 2" PVC DWV Double Sanitary Tee (ALL HUB)

Price: 4.05 USD
SKU: 913
Weight: 0.73 lb(s)
Stock quantity: 2

1544. 2" PVC DWV Double Wye (ALL HUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 6.30 USD
SKU: 893
Weight: 0.75 lb(s)
Stock quantity: 2

1545. 2" PVC DWV Female Adapter (HUB x FIP)

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.37 USD
SKU: 825
Weight: 0.17 lb(s)
Stock quantity: 16

1546. 2" PVC DWV Fitting Adapter (SPIGOT x FIP)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.47 USD
SKU: 846
Weight: 0.40 lb(s)
Stock quantity: 5

1547. 2" PVC DWV Male Adapter

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedSize range 1¼" to 4"

Price: 0.99 USD
SKU: 957
Weight: 0.14 lb(s)
Stock quantity: 31

1548. 2" PVC DWV P-Trap

Maximum service temperature 140°FMaximum working pressure of 5 psiDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 4.09 USD
SKU: 1215
Weight: 1.00 lb(s)
Stock quantity: 25

1549. 2" PVC DWV Sanitary Tee (HUB x HUB x HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 2.25 USD
SKU: 905
Weight: 0.55 lb(s)
Stock quantity: 27

1550. 2" PVC DWV Wye (HUB x HUB xHUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness

Price: 2.61 USD
SKU: 1003
Weight: 0.65 lb(s)
Stock quantity: 72

1551. 2" Quiet Spring-Loaded Check Valve

Heavy Duty PVCSpring-loaded valve reduces "water hammer" effect125 PSI ratedVertical or horizontal installationMaximum fluid temp. 160 degrees F

Price: 43.00 USD
SKU: 8455
Weight: 2.00 lb(s)
Stock quantity: 5

1552. 2" SCH 40 PVC Ball Valve

Pressure rating is 150 psi at 73°FConnection Type: SolventProvides great strength and resistance to corrosion and chemicalsCompact and lightweight design

Price: 18.36 USD
SKU: 4422
Weight: 1.75 lb(s)
Stock quantity: 0

1553. 2" Shielded Transition Coupling (Cast Iron, PVC or Steel to Copper)

Corrosion-resistant 300 Series stainless steel componentMaximum working pressure of 4.3 psi Neoprene rubber sleeve conforms to ASTM C 564Certified to ASTM C-1460, CSA B602

Price: 12.83 USD
SKU: 3621
Weight: 0.34 lb(s)
Stock quantity: 0

1554. 2" Shielded Transition Coupling (Cast Iron, PVC, Steel to PVC, Steel)

Corrosion-resistant 300 Series stainless steel componentMaximum working pressure of 4.3 psi Neoprene rubber sleeve conforms to ASTM C 564Certified to ASTM C-1460, CSA B602

Price: 8.01 USD
SKU: 2318
Weight: 0.34 lb(s)
Stock quantity: 19

1555. 2" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 300 lbs.Pipe Size: 2"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69

Price: 0.53 USD

SKU: 1523

Weight: 0.14 lb(s)

Stock quantity: 255

1556. 2" Standard Grooved 45° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 6.34 USD
SKU: 3161
Weight: 1.30 lb(s)
Stock quantity: 21

1557. 2" Standard Grooved 90° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 5.44 USD
SKU: 3260
Weight: 1.90 lb(s)
Stock quantity: 64

1558. 2" Standard Grooved Cap

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 6.32 USD
SKU: 3153
Weight: 0.26 lb(s)
Stock quantity: 14

1559. 2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 8.60 USD
SKU: 4047
Weight: 2.80 lb(s)
Stock quantity: 5

1560. 2" Suspension Clamp

Price: 1.72 USD
SKU: 3325
Weight: 0.03 lb(s)
Stock quantity: 0

1561. 2" Sweat Ball Valve

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 34.94 USD
SKU: 2381
Weight: 3.48 lb(s)
Stock quantity: 15

1562. 2" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 51.30 USD
SKU: 2402
Weight: 3.48 lb(s)
Stock quantity: 16

1563. 2" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 40.78 USD
SKU: 7663
Weight: 3.48 lb(s)
Stock quantity: 16

1564. 2" Sweat Brass Flange

Price: 52.30 USD
SKU: 4238
Weight: 2.38 lb(s)
Stock quantity: 7

1565. 2" Sweat Brass Flange with Isolating Ball Valve

Price: 44.80 USD
SKU: 6373
Weight: 4.00 lb(s)
Stock quantity: 9

1566. 2" Sweat Check Valve

For installing on copper pipe using standard copper soldering methodArrow on the valve body shows direction of the flowSuitable for upright horizontal and vertical (arrow pointing upward) installations in plumbing and heating systems Pressure Ratings: 200 psi Non-Shock WOGConstruction: Lead-Free Brass Body

Price: 38.40 USD
SKU: 2477
Weight: 5.60 lb(s)

1567. 2" Sweat Gate Valve

Price: 50.73 USD
SKU: 2916
Weight: 3.30 lb(s)
Stock quantity: 7

1568. 2" Test Plug

Large wing nut for easy operationGalvanized steel flange with molded rubber gasket

Price: 2.21 USD
SKU: 1904
Weight: 0.18 lb(s)
Stock quantity: 0

1569. 2" Universal Flapper

The Flapper features rubber construction The toilet flapper is universal and fits 2 inch plastic flush valvesThis original toilet flapper is the choice of plumbing pros since 1954Made of flexible rubber for a tight seal and easy to install, the 54 toilet parts included are: (1) Toilet Flapper Valve and (1) Stainless Steel Chain

Price: 6.30 USD
SKU: 5070
Weight: 0.50 lb(s)
Stock quantity: 16

1570. 2" Waterflow Alarm Switch with Retard

NEMA 4/IP54 Rated Enclosure suitable for indoor or outdoor use with factory installed gasket and die-cast housing when used with appropriate conduit fittingTemperature Range: 40°F - 120°FNon-corrosive sleeve factory installed in saddle

Price: 158.99 USD
SKU: 4669
Weight: 3.20 lb(s)
Stock quantity: 7

1571. 2" x 1" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 11.22 USD
SKU: 2570
Weight: 1.30 lb(s)
Stock quantity: 4

1572. 2" x 1" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.57 USD
SKU: 223
Weight: 0.65 lb(s)
Stock quantity: 4

1573. 2" x 1" Black Cast Iron Steam 90° Elbow (Imported)

Price: 12.34 USD
SKU: 1007
Weight: 3.78 lb(s)
Stock quantity: 4

1574. 2" x 1" Black Cast Iron Steam Coupling (Imported)

Price: 23.80 USD
SKU: 1096
Weight: 1.80 lb(s)
Stock quantity: 5

1575. 2" x 1" Black Cast Iron Steam Tee (Imported)

Price: 12.56 USD
SKU: 1352
Weight: 3.78 lb(s)
Stock quantity: 16

1576. 2" x 1" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 4.91 USD
SKU: 340
Weight: 1.09 lb(s)
Stock quantity: 4

1577. 2" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 11.64 USD
SKU: 54
Weight: 1.91 lb(s)
Stock quantity: 1

1578. 2" x 1" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 28.19 USD
SKU: 1290
Weight: 1.40 lb(s)

1579. 2" x 1" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 15.26 USD
SKU: 1207
Weight: 0.75 lb(s)
Stock quantity: 2

1580. 2" x 1" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 31.31 USD
SKU: 1264
Weight: 1.21 lb(s)
Stock quantity: 6

1581. 2" x 1" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 34.39 USD
SKU: 1341
Weight: 2.03 lb(s)
Stock quantity: 1

1582. 2" x 1" Copper Reducer Coupling

Price: 7.00 USD
SKU: 1940
Weight: 0.36 lb(s)
Stock quantity: 3

1583. 2" x 1" FTG x C Copper Reducer Fitting Adapter

Price: 7.29 USD
SKU: 1972
Weight: 0.36 lb(s)
Stock quantity: 21

1584. 2" x 1" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.41 USD
SKU: 2853
Weight: 1.30 lb(s)
Stock quantity: 1

1585. 2" x 1" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.76 USD
SKU: 4170
Weight: 0.65 lb(s)
Stock quantity: 0

1586. 2" x 1" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.23 USD
SKU: 3033
Weight: 1.09 lb(s)
Stock quantity: 1

1587. 2" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standardsCertified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 7.60 USD
SKU: 6
Weight: 1.98 lb(s)
Stock quantity: 2

1588. 2" x 1" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 11.60 USD
SKU: 3173
Weight: 2.20 lb(s)
Stock quantity: 19

1589. 2" x 1" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 11.22 USD
SKU: 47
Weight: 1.49 lb(s)
Stock quantity: 4

1590. 2" x 1" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 20.03 USD
SKU: 2100
Weight: 0.90 lb(s)

1591. 2" x 1" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 9.13 USD
SKU: 2971
Weight: 1.49 lb(s)
Stock quantity: 2

1592. 2" x 1" x 1-1/2" Black Cast Iron Steam Tee (Imported)

Price: 10.83 USD
SKU: 1179
Weight: 3.78 lb(s)
Stock quantity: 14

1593. 2" x 1" x 1-1/4" Black Cast Iron Steam Tee (Imported)

Price: 11.64 USD
SKU: 1171
Weight: 3.78 lb(s)
Stock quantity: 11

1594. 2" x 1" x 2" Black Cast Iron Steam Tee (Imported)

Price: 14.46 USD
SKU: 1540
Weight: 3.78 lb(s)
Stock quantity: 3

1595. 2" x 1" x 2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 9.90 USD
SKU: 103
Weight: 2.21 lb(s)
Stock quantity: 6

1596. 2" x 1" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 20.03 USD
SKU: 2099
Weight: 1.24 lb(s)

1597. 2" x 1" x 2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 9.13 USD
SKU: 2972
Weight: 2.21 lb(s)
Stock quantity: 0

1598. 2" x 1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.23 USD
SKU: 2586
Weight: 1.00 lb(s)
Stock quantity: 5

1599. 2" x 1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 3.65 USD
SKU: 2953
Weight: 0.56 lb(s)
Stock quantity: 1

1600. 2" x 1/2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 7.02 USD
SKU: 882
Weight: 3.70 lb(s)
Stock quantity: 2

1601. 2" x 1/2" Black Cast Iron Steam Tee (Imported)

Price: 8.37 USD
SKU: 1334
Weight: 3.78 lb(s)
Stock quantity: 22

1602. 2" x 1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 5.06 USD
SKU: 1142
Weight: 1.06 lb(s)
Stock quantity: 5

1603. 2" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 10.11 USD
SKU: 319
Weight: 1.66 lb(s)
Stock quantity: 23

1604. 2" x 1/2" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 13.39 USD
SKU: 1205
Weight: 0.66 lb(s)
Stock quantity: 2

1605. 2" x 1/2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 34.39 USD
SKU: 1391
Weight: 1.82 lb(s)
Stock quantity: 1

1606. 2" x 1/2" Copper Reducer Coupling

Price: 7.43 USD
SKU: 1942
Weight: 0.34 lb(s)
Stock quantity: 5

1607. 2" x 1/2" FTG x C Copper Reducer Fitting Adapter

Price: 7.74 USD
SKU: 1974
Weight: 0.34 lb(s)
Stock quantity: 5

1608. 2" x 1/2" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.76 USD
SKU: 4475
Weight: 0.56 lb(s)
Stock quantity: 0

1609. 2" x 1/2" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.08 USD
SKU: 3031
Weight: 1.06 lb(s)
Stock quantity: 0

1610. 2" x 1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.46 USD
SKU: 2979
Weight: 1.66 lb(s)
Stock quantity: 0

1611. 2" x 1/2" x 2" Black Cast Iron Steam Tee (Imported)

Price: 13.80 USD
SKU: 1093
Weight: 3.78 lb(s)
Stock quantity: 4

1612. 2" x 1/2" x 2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 8.80 USD
SKU: 48
Weight: 2.18 lb(s)
Stock quantity: 8

1613. 2" x 1/2" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 20.03 USD
SKU: 2102
Weight: 1.18 lb(s)

1614. 2" x 1/2" x 2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 9.13 USD
SKU: 2969
Weight: 2.18 lb(s)
Stock quantity: 0

1615. 2" x 10' Innoflue Pipe

Price: 18.75 USD
SKU: 8544
Stock quantity: 36

1616. 2" x 10' SCH 40 Black Pipe

Price: 38.12 USD
SKU: 1088
Stock quantity: 324

1617. 2" x 10' SCH 40 Galvanized Pipe

Price: 38.24 USD
SKU: 3817
Stock quantity: 14

1618. 2" x 10' SCH 40 PVC DWV Pipe

Price: 9.79 USD
SKU: 6503
Stock quantity: 106

1619. 2" x 10' Type L Copper Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.70"

Price: 76.75 USD
SKU: 2187
Weight: 17.50 lb(s)
Stock quantity: -7

1620. 2" x 10" Copper M Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.058"

Price: 60.93 USD
SKU: 2399
Weight: 14.60 lb(s)
Stock quantity: 11

1621. 2" x 10" No Hub Cast Iron Pipe

Cast-iron construction 212° F maximum working temperature For non-pressure applications Noncombustible and offers superior sound-deadening performance Conform to ASTM A 888 and CISPI Standard 301

Price: 34.92 USD
SKU: 6407
Weight: 37.10 lb(s)
Stock quantity: 80

1622. 2" x 10.6 SCH 10 Black Pipe GG

Price: 28.36 USD
SKU: 4606
Stock quantity: 82

1623. 2" x 1-1/2 x 1-1/2 Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 14.19 USD
SKU: 43
Weight: 2.02 lb(s)
Stock quantity: 6

1624. 2" x 1-1/2" Reducing No-Hub Coupling

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certifiedCouplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310Neoprene rubber gasket meets/exceeds ASTM C 564Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 2.35 USD

SKU: 742

Weight: 0.35 lb(s)

Stock quantity: 112

1625. 2" x 1-1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.58 USD
SKU: 2594
Weight: 1.67 lb(s)
Stock quantity: 6

1626. 2" x 1-1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.55 USD
SKU: 14
Weight: 0.65 lb(s)
Stock quantity: 3

1627. 2" x 1-1/2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 12.53 USD
SKU: 1020
Weight: 3.78 lb(s)
Stock quantity: 0

1628. 2" x 1-1/2" Black Cast Iron Steam Tee (Imported)

Price: 17.26 USD
SKU: 1376
Weight: 3.78 lb(s)
Stock quantity: 17

1629. 2" x 1-1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 5.15 USD
SKU: 167
Weight: 1.32 lb(s)
Stock quantity: 19

1630. 2" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 9.00 USD
SKU: 104
Weight: 2.28 lb(s)
Stock quantity: 21

1631. 2" x 1-1/2" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 28.19 USD
SKU: 1488
Weight: 1.80 lb(s)
Stock quantity: 2

1632. 2" x 1-1/2" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 12.86 USD
SKU: 1209
Weight: 0.75 lb(s)
Stock quantity: 2

1633. 2" x 1-1/2" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 20.91 USD
SKU: 268
Weight: 1.44 lb(s)
Stock quantity: 1

1634. 2" x 1-1/2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 34.39 USD
SKU: 1317
Weight: 2.40 lb(s)
Stock quantity: 1

1635. 2" x 1-1/2" Closet Spud

Price: 9.90 USD
SKU: 2376
Weight: 1.50 lb(s)
Stock quantity: 1

1636. 2" x 1-1/2" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 18.97 USD
SKU: 2618
Weight: 1.07 lb(s)

1637. 2" x 1-1/2" Copper Reducer Coupling

Price: 6.63 USD
SKU: 1938
Weight: 0.37 lb(s)
Stock quantity: 16

1638. 2" x 1-1/2" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 21.45 USD
SKU: 2919
Weight: 0.65 lb(s)

1639. 2" x 1-1/2" FTG x C Copper Reducer Fitting Adapter

Price: 6.91 USD
SKU: 1970
Weight: 0.29 lb(s)
Stock quantity: 4

1640. 2" x 1-1/2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 7.15 USD
SKU: 1
Weight: 1.67 lb(s)
Stock quantity: 1

1641. 2" x 1-1/2" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.23 USD
SKU: 2798
Weight: 0.65 lb(s)
Stock quantity: 18

1642. 2" x 1-1/2" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.23 USD
SKU: 3035
Weight: 1.32 lb(s)
Stock quantity: 0

1643. 2" x 1-1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 11.20 USD
SKU: 35
Weight: 2.28 lb(s)
Stock quantity: 3

1644. 2" x 1-1/2" LA Rough Brass Swivel P-Trap w/Cleanout

IPS ConnectionWorking temperature range of 0° to 120°FRough brass finish LA p-traps feature a union connection at the top of the u-bend to allow the elbow to swivel

Price: 32.35 USD
SKU: 2349
Weight: 3.00 lb(s)
Stock quantity: 25

1645. 2" x 1-1/2" No Hub Cast Iron Double Sanitary Tap Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 14.95 USD
SKU: 7625
Weight: 4.00 lb(s)
Stock quantity: 20

1646. 2" x 1-1/2" No Hub Cast Iron Sanitary Tap Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 6.67 USD
SKU: 6427
Weight: 3.40 lb(s)
Stock quantity: 32

1647. 2" x 1-1/2" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 9.04 USD
SKU: 7628
Weight: 3.42 lb(s)
Stock quantity: 15

1648. 2" x 1-1/2" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 4.69 USD
SKU: 7626
Weight: 1.09 lb(s)
Stock quantity: 7

1649. 2" x 1-1/2" No Hub Cast Iron Tap 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 8.21 USD
SKU: 7627
Weight: 2.00 lb(s)
Stock quantity: 9

1650. 2" x 1-1/2" NY Rough Brass P-Trap w/Cleanout

IPS ConnectionWorking temperature range of 0° to 120°FRough brass finish NY traps are a single body piece without a union swivel connection

Price: 17.80 USD
SKU: 2684
Weight: 2.10 lb(s)
Stock quantity: 16

1651. 2" x 1-1/2" PVC DWV Double Sanitary Tee (ALL HUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 5.47 USD
SKU: 5877
Weight: 1.70 lb(s)
Stock quantity: 1

1652. 2" x 1-1/2" PVC DWV Reducer Coupling (HUBxHUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness.Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 1.10 USD
SKU: 3024
Weight: 0.16 lb(s)
Stock quantity: 8

1653. 2" x 1-1/2" PVC DWV Sanitary Tee (HUB x HUB x HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.71 USD
SKU: 1231
Weight: 0.50 lb(s)
Stock quantity: 20

1654. 2" x 1-1/2" PVC DWV Wye (HUBxHUBxHUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness

Price: 3.24 USD

SKU: 1023

Weight: 0.60 lb(s)

Stock quantity: 11

1655. 2" x 1-1/2" PVC Pressure Male Adapter (SLIP x MIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedSize range 1¼" to 4"

Price: 1.39 USD
SKU: 3417
Weight: 0.20 lb(s)
Stock quantity: 0

1656. 2" x 1-1/2" RB Swivel Tee Trap

IPS ConnectionWorking temperature range of 0° to 120°FRough brass finish

Price: 29.16 USD
SKU: 2597
Weight: 3.40 lb(s)
Stock quantity: 7

1657. 2" x 1-1/2" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 2.72 USD
SKU: 2520
Weight: 0.38 lb(s)
Stock quantity: 16

1658. 2" x 1-1/2" Shielded Transition Coupling (Cast Iron, PVC, Steel to Tubular)

Corrosion-resistant 300 Series stainless steel componentMaximum working pressure of 4.3 psi Neoprene rubber sleeve conforms to ASTM C 564Certified to ASTM C-1460, CSA B602

Price: 6.16 USD
SKU: 3147
Weight: 0.54 lb(s)
Stock quantity: 24

1659. 2" x 1-1/2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 15.72 USD
SKU: 4552
Weight: 2.50 lb(s)
Stock quantity: 0

1660. 2" x 1-1/2" x 1" Black Cast Iron Steam Tee (Imported)

Price: 15.46 USD
SKU: 1632
Weight: 3.78 lb(s)
Stock quantity: 19

1661. 2" x 1-1/2" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 12.06 USD
SKU: 306
Weight: 1.70 lb(s)
Stock quantity: 10

1662. 2" x 1-1/2" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 19.30 USD
SKU: 2095
Weight: 0.87 lb(s)

1663. 2" x 1-1/2" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.96 USD
SKU: 2975
Weight: 1.70 lb(s)
Stock quantity: 0

1664. 2" x 1-1/2" x 1/2" Black Cast Iron Steam Tee (Imported)

Price: 14.37 USD
SKU: 1605
Weight: 3.78 lb(s)
Stock quantity: 18

1665. 2" x 1-1/2" x 1-1/2" Black Cast Iron Steam Tee (Imported)

Price: 13.16 USD
SKU: 1657
Weight: 3.78 lb(s)
Stock quantity: 9

1666. 2" x 1-1/2" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 18.98 USD
SKU: 2093
Weight: 1.05 lb(s)

1667. 2" x 1-1/2" x 1-1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.86 USD
SKU: 2977
Weight: 2.02 lb(s)
Stock quantity: 0

1668. 2" x 1-1/2" x 1-1/4" Black Cast Iron Steam Tee (Imported)

Price: 16.56 USD
SKU: 1650
Weight: 3.78 lb(s)
Stock quantity: 17

1669. 2" x 1-1/2" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 12.28 USD
SKU: 296
Weight: 1.90 lb(s)
Stock quantity: 8

1670. 2" x 1-1/2" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 21.75 USD
SKU: 2094
Weight: 0.93 lb(s)

1671. 2" x 1-1/2" x 1-1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 9.13 USD
SKU: 2976
Weight: 1.90 lb(s)
Stock quantity: 0

1672. 2" x 1-1/2" x 2" Black Cast Iron Steam Tee (Imported)

Price: 14.38 USD
SKU: 1318
Weight: 3.78 lb(s)
Stock quantity: 3

1673. 2" x 1-1/2" x 2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 12.28 USD
SKU: 101
Weight: 2.39 lb(s)
Stock quantity: 6

1674. 2" x 1-1/2" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 20.03 USD
SKU: 2092
Weight: 1.18 lb(s)

1675. 2" x 1-1/2" x 2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 9.13 USD
SKU: 2978
Weight: 2.39 lb(s)
Stock quantity: 0

1676. 2" x 1-1/2" x 3/4" Black Cast Iron Steam Tee (Imported)

Price: 12.37 USD
SKU: 1613
Weight: 3.78 lb(s)
Stock quantity: 10

1677. 2" x 1-1/2" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 15.16 USD
SKU: 4922
Weight: 1.55 lb(s)
Stock quantity: 16

1678. 2" x 1-1/2" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 19.80 USD
SKU: 2096
Weight: 0.69 lb(s)

1679. 2" x 1-1/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 9.53 USD
SKU: 13
Weight: 1.47 lb(s)
Stock quantity: 6

1680. 2" x 1-1/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 2.64 USD
SKU: 216
Weight: 0.81 lb(s)
Stock quantity: 3

1681. 2" x 1-1/4" Black Cast Iron Steam 90° Elbow (Imported)

Price: 12.40 USD
SKU: 1014
Weight: 3.78 lb(s)
Stock quantity: 5

1682. 2" x 1-1/4" Black Cast Iron Steam Tee (Imported)

Price: 15.37 USD
SKU: 1367
Weight: 3.78 lb(s)
Stock quantity: 15

1683. 2" x 1-1/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 5.63 USD
SKU: 168
Weight: 1.21 lb(s)
Stock quantity: 11

1684. 2" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 9.97 USD
SKU: 317
Weight: 2.13 lb(s)
Stock quantity: 12

1685. 2" x 1-1/4" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 12.69 USD
SKU: 1208
Weight: 0.91 lb(s)
Stock quantity: 3

1686. 2" x 1-1/4" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 20.91 USD
SKU: 1265
Weight: 1.33 lb(s)
Stock quantity: 2

1687. 2" x 1-1/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 34.39 USD
SKU: 1364
Weight: 2.30 lb(s)
Stock quantity: 1

1688. 2" x 1-1/4" Closet Spud

Price: 9.71 USD
SKU: 3186
Weight: 1.00 lb(s)
Stock quantity: 2

1689. 2" x 1-1/4" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 23.13 USD
SKU: 2552
Weight: 1.07 lb(s)

1690. 2" x 1-1/4" Copper Reducer Coupling

Price: 6.58 USD
SKU: 1939
Weight: 0.35 lb(s)
Stock quantity: 10

1691. 2" x 1-1/4" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 26.63 USD
SKU: 2640
Weight: 0.63 lb(s)

1692. 2" x 1-1/4" FTG x C Copper Reducer Fitting Adapter

Price: 6.91 USD
SKU: 1971
Weight: 0.29 lb(s)
Stock quantity: 8

1693. 2" x 1-1/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.41 USD
SKU: 2854
Weight: 1.47 lb(s)
Stock quantity: 0

1694. 2" x 1-1/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.05 USD
SKU: 3162
Weight: 0.81 lb(s)
Stock quantity: 2

1695. 2" x 1-1/4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.50 USD
SKU: 3034
Weight: 1.21 lb(s)
Stock quantity: 0

1696. 2" x 1-1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 11.20 USD
SKU: 25
Weight: 2.13 lb(s)
Stock quantity: 3

1697. 2" x 1-1/4" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 15.81 USD
SKU: 3263
Weight: 2.50 lb(s)
Stock quantity: 26

1698. 2" x 1-1/4" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 25.87 USD
SKU: 1019
Weight: 0.70 lb(s)
Stock quantity: 0

1699. 2" x 1-1/4" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 8.80 USD
SKU: 44
Weight: 1.59 lb(s)
Stock quantity: 7

1700. 2" x 1-1/4" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 21.55 USD
SKU: 2098
Weight: 0.87 lb(s)

1701. 2" x 1-1/4" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 13.31 USD
SKU: 42
Weight: 1.94 lb(s)
Stock quantity: 10

1702. 2" x 1-1/4" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 21.53 USD
SKU: 2583
Weight: 1.05 lb(s)

1703. 2" x 1-1/4" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 11.00 USD
SKU: 100
Weight: 1.78 lb(s)
Stock quantity: 8

1704. 2" x 1-1/4" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 21.75 USD
SKU: 2097
Weight: 0.92 lb(s)

1705. 2" x 1-1/4" x 1-1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 9.05 USD
SKU: 2973
Weight: 1.78 lb(s)
Stock quantity: 0

1706. 2" x 1-1/4" x 2" Black Cast Iron Steam Tee (Imported)

Price: 15.62 USD
SKU: 1567
Weight: 3.78 lb(s)
Stock quantity: 29

1707. 2" x 1-1/4" x 2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 11.11 USD
SKU: 3950
Weight: 2.30 lb(s)
Stock quantity: 1

1708. 2" x 1-1/4" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 20.84 USD
SKU: 3018
Weight: 1.24 lb(s)

1709. 2" x 12' Innoflue Pipe

Price: 4.52 USD
SKU: 7854
Stock quantity: 26

1710. 2" x 12' Roll Compression Seal Tape

#76086Stops nasty leaks under pressure without turning off the water source.Seal leaks up to 150 PSI (water, air, steam)Self-fusing layers for a waterproof, long-term compression sealEffective to 500°F / 260°CSuitable for burial without jacketingEnvironmentally safe and non-toxicStops and prevents corrosionSafe for drinking waterAll purpose - use on iron, brass, copper, aluminum, stainless steel, galvanized steel, polyethylene, polypropylene, PVC, CPVC, ABS and moreIdeal for irrigation pipe repairEasy to use - no waste

Price: 61.45 USD
SKU: 8833
Weight: 0.60 lb(s)
Stock quantity: 0

1711. 2" x 2" Closet Spud

Price: 10.64 USD
SKU: 3194
Weight: 1.50 lb(s)
Stock quantity: 2

1712. 2" x 2" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 12.00 USD
SKU: 2089
Weight: 0.91 lb(s)

1713. 2" x 2" x 1" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 30.69 USD
SKU: 2560
Weight: 1.23 lb(s)

1714. 2" x 2" x 1/2" Black Knee Bracket

Price: 2.48 USD
SKU: 4913
Weight: 0.20 lb(s)
Stock quantity: 111

1715. 2" x 2" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 11.62 USD
SKU: 2091
Weight: 0.63 lb(s)

1716. 2" x 2" x 1/2" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 35.62 USD
SKU: 2575
Weight: 0.97 lb(s)

1717. 2" x 2" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 12.00 USD
SKU: 2087
Weight: 1.03 lb(s)

1718. 2" x 2" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 13.03 USD
SKU: 2088
Weight: 0.96 lb(s)

1719. 2" x 2" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 11.31 USD
SKU: 2090
Weight: 0.71 lb(s)

1720. 2" x 2" x 3/4" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 24.75 USD
SKU: 2567
Weight: 1.10 lb(s)

1721. 2" x 2" x 3/8" Black Fish Plate

Price: 2.57 USD
SKU: 1487
Weight: 0.17 lb(s)
Stock quantity: 0

1722. 2" x 2" x 3/8" Black Knee Bracket

Price: 0.83 USD
SKU: 4721
Weight: 0.20 lb(s)
Stock quantity: 180

1723. 2" x 2-1/2" Black Cast Iron Steam Tee (Imported)

Price: 18.40 USD
SKU: 1384
Weight: 3.78 lb(s)
Stock quantity: 2

1724. 2" x 2-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 9.25 USD
SKU: 1705
Weight: 0.64 lb(s)
Stock quantity: 1

1725. 2" x 2-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.40 USD
SKU: 2572
Weight: 0.89 lb(s)
Stock quantity: 1

1726. 2" x 2-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.32 USD
SKU: 471
Weight: 0.89 lb(s)
Stock quantity: 44

1727. 2" x 24' Innoflue Pipe

Price: 6.90 USD
SKU: 7853
Stock quantity: 15

1728. 2" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 14.17 USD
SKU: 1707
Weight: 0.81 lb(s)
Stock quantity: 4

1729. 2" x 3" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.25 USD
SKU: 2678
Weight: 1.09 lb(s)
Stock quantity: 18

1730. 2" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.93 USD
SKU: 472
Weight: 1.09 lb(s)
Stock quantity: 43

1731. 2" x 3/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 9.90 USD
SKU: 177
Weight: 1.13 lb(s)
Stock quantity: 8

1732. 2" x 3/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 3.52 USD
SKU: 345
Weight: 0.62 lb(s)
Stock quantity: 0

1733. 2" x 3/4" Black Cast Iron Steam 90° Elbow (Imported)

Price: 12.33 USD
SKU: 1000
Weight: 3.78 lb(s)
Stock quantity: 2

1734. 2" x 3/4" Black Cast Iron Steam Tee (Imported)

Price: 9.10 USD
SKU: 1344
Weight: 3.78 lb(s)
Stock quantity: 16

1735. 2" x 3/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 4.84 USD
SKU: 160
Weight: 1.04 lb(s)
Stock quantity: 10

1736. 2" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 12.30 USD
SKU: 61
Weight: 1.78 lb(s)
Stock quantity: 21

1737. 2" x 3/4" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 15.23 USD
SKU: 1206
Weight: 0.72 lb(s)
Stock quantity: 1

1738. 2" x 3/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 34.39 USD
SKU: 1269
Weight: 1.90 lb(s)
Stock quantity: 2

1739. 2" x 3/4" Copper Reducer Coupling

Price: 7.13 USD
SKU: 1941
Weight: 0.37 lb(s)
Stock quantity: 9

1740. 2" x 3/4" FTG x C Copper Reducer Fitting Adapter

Price: 10.16 USD
SKU: 1973
Weight: 0.37 lb(s)
Stock quantity: 13

1741. 2" x 3/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.55 USD
SKU: 2852
Weight: 1.13 lb(s)
Stock quantity: 0

1742. 2" x 3/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.56 USD
SKU: 3736
Weight: 0.62 lb(s)
Stock quantity: 0

1743. 2" x 3/4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.08 USD
SKU: 3032
Weight: 1.04 lb(s)
Stock quantity: 0

1744. 2" x 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.75 USD
SKU: 2980
Weight: 1.78 lb(s)
Stock quantity: 2

1745. 2" x 3/4" x 2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 10.45 USD
SKU: 302
Weight: 2.14 lb(s)
Stock quantity: 6

1746. 2" x 3/4" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 20.03 USD
SKU: 2101
Weight: 0.71 lb(s)

1747. 2" x 3/4" x 2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 30.83 USD
SKU: 2970
Weight: 2.14 lb(s)
Stock quantity: 0

1748. 2" x 3/4" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 45.92 USD
SKU: 3465
Weight: 0.71 lb(s)

1749. 2" x 3/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 3.70 USD
SKU: 241
Weight: 0.56 lb(s)
Stock quantity: 5

1750. 2" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 12.16 USD
SKU: 1708
Weight: 0.98 lb(s)
Stock quantity: 9

1751. 2" x 3-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.70 USD
SKU: 2614
Weight: 1.29 lb(s)
Stock quantity: 16

1752. 2" x 3-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.34 USD
SKU: 614
Weight: 1.29 lb(s)
Stock quantity: 48

1753. 2" x 36' Innoflue Pipe

Price: 8.67 USD
SKU: 8258
Stock quantity: 21

1754. 2" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 18.07 USD
SKU: 1709
Weight: 1.16 lb(s)
Stock quantity: 7

1755. 2" x 4" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.83 USD
SKU: 2668
Weight: 1.51 lb(s)
Stock quantity: 36

1756. 2" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.34 USD
SKU: 594
Weight: 1.51 lb(s)
Stock quantity: 33

1757. 2" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 15.78 USD
SKU: 1710
Weight: 1.33 lb(s)
Stock quantity: 5

1758. 2" x 4-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 4.49 USD
SKU: 2783
Weight: 1.77 lb(s)
Stock quantity: 47

1759. 2" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.71 USD
SKU: 608
Weight: 1.77 lb(s)
Stock quantity: 49

1760. 2" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 22.43 USD
SKU: 1711
Weight: 1.50 lb(s)
Stock quantity: 6

1761. 2" x 5" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 4.00 USD
SKU: 2807
Weight: 1.99 lb(s)
Stock quantity: 44

1762. 2" x 5" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 2.71 USD
SKU: 609
Weight: 1.99 lb(s)
Stock quantity: 43

1763. 2" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 19.17 USD
SKU: 1712
Weight: 1.67 lb(s)
Stock quantity: 5

1764. 2" x 5-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 3.87 USD
SKU: 2776
Weight: 2.24 lb(s)
Stock quantity: 14

1765. 2" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 3.12 USD
SKU: 645
Weight: 2.24 lb(s)
Stock quantity: 48

1766. 2" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 21.20 USD
SKU: 1713
Weight: 1.84 lb(s)
Stock quantity: 11

1767. 2" x 6" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 5.02 USD
SKU: 2397
Weight: 2.35 lb(s)
Stock quantity: 39

1768. 2" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 3.12 USD
SKU: 646
Weight: 2.35 lb(s)
Stock quantity: 24

1769. 2" x 72' Innoflue Pipe

Price: 12.38 USD
SKU: 7855
Stock quantity: 21

1770. 2" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 11.92 USD
SKU: 1706
Weight: 0.47 lb(s)
Stock quantity: 10

1771. 2" x Close Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 2.14 USD
SKU: 3073
Weight: 0.66 lb(s)
Stock quantity: 15

1772. 2" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.66 USD
SKU: 463
Weight: 0.66 lb(s)
Stock quantity: 35

1773. 2" Yoke Valve Supervisory Switch and Outside Screw

Operating temperature range: 40º to 140ºVisual switch indicators Two conduit entrances Adjustable length trip rod Accomodates up to 12AWG wire Three position switch detects tampering and valve closure Knurled mounting bracket prevents slipping Fine adjustment feature for fast, easy installation

Price: 111.83 USD

SKU: 4595

Weight: 1.60 lb(s)

Stock quantity: 7

1774. 2.1 gal Hydronic Expansion Tank For Heating Systems

Certified synthetic SBR rubber diaphragmMIG welding eliminates interior rough spots and sharp edgesAll diaphragms designed to maximize drawdownExternal baked epoxy-polyester coating provides a durable appliance finishWelded side outlet allows easy and quick installationProtected pre charge valve eliminates potential leak pathLow profile tank design with full membrane depth eliminates stretching of diaphragm, providing increased life cycleModel FTH15Max. Operating Pressure: 75 psiOperating Temperature: 210° F Factory Precharge: 12 psi

Price: 28.70 USD

SKU: 2263

Weight: 4.60 lb(s)

Stock quantity: 0

1775. 2.1 gal Thermal Expansion Tank For Hot Water Heater

All tanks are NSF61 CertifiedMIG welding eliminates interior rough spots and sharp edges150 psi max pressure ratingExternal baked epoxy-polyester coating provides a durable appliance finishExclusive polypropylene liner eliminates internal corrosionProtected precharge valve eliminates potential leak pathMax. Operating Pressure: 150 psi Operating Temperature: 210° F Factory Precharge: 40 psiModel: FTT5

Price: 34.30 USD

SKU: 5040

Weight: 6.00 lb(s)

Stock quantity: 11

1776. 2.7 oz. Hybrifix Super 7 Professional All Purpose Adhesive Sealant (Clear)

Universal bonding and sealing for interior and exterior usePermanently elasticFree of isocyanates, solvents and siliconesNo shrinkage and bubble freeResistant to UV, moisture, mould and weatherAdheres perfectly without primer on most, even damp, surfacesNeutral curing, almost odourlessNon corrosive towards metalsHigh mechanical resistance, end strength and E-modulusAbsorbs acoustic and mechanical vibrations

Price: 5.75 USD

SKU: 7541

Weight: 0.20 lb(s)

Stock quantity: 41

1777. 2.7 oz. Hybrifix Super 7 Professional All Purpose Adhesive Sealant (White)

Universal bonding and sealing for interior and exterior usePermanently elasticFree of isocyanates, solvents and siliconesNo shrinkage and bubble freeResistant to UV, moisture, mould and weatherAdheres perfectly without primer on most, even damp, surfacesNeutral curing, almost odourlessNon corrosive towards metalsHigh mechanical resistance, end strength and E-modulusAbsorbs acoustic and mechanical vibrations

Price: 5.75 USD

SKU: 7529

Weight: 0.30 lb(s)

Stock quantity: 32

1778. 2.8 oz. Silicone Tub & Tile Waterproof Sealant (Clear)

Permanently waterproofShrink & crack-proofResists mold & mildewNon-paintableTypical uses: showers, tubs, sinks, tile, countertops and fixturesAdheres to: most ceramic tile, laminate, porcelain, glass, metal, plastic, granite and wood

Price: 5.15 USD
SKU: 25686
Weight: 0.26 lb(s)
Stock quantity: 136

1779. 2.8 oz. Silicone Tub & Tile Waterproof Sealant (White)

Permanently waterproofShrink & crack-proofResists mold & mildewNon-paintableTypical uses: showers, tubs, sinks, tile, countertops and fixturesAdheres to: most ceramic tile, laminate, porcelain, glass, metal, plastic, granite and wood

Price: 5.15 USD
SKU: 25676
Weight: 0.26 lb(s)
Stock quantity: 235

1780. 20 GA, Pop-up Fit-all Trip Lever Bath Drain

Patented pre-adjustable linkageCast brass pop-up and shoe plugHeavy duty, highly polished face plateExtra long plunger strokeHeavy duty cast red brass head, tee and shoePartially assembled in cartonCompartmentalized packagingModel G0041805

Price: 82.94 USD
SKU: 6299
Weight: 5.25 lb(s)
Stock quantity: 1

1781. 20 GA, Pop-up Side Outlet Trip Lever Bath Drain

Patented pre-adjustable linkage Cast brass pop-up and shoe plugHeavy duty, highly polished face plateExtra long plunger strokeHeavy duty cast red brass head, tee and shoeModel G0041807

Price: 101.98 USD
SKU: 3195
Weight: 6.00 lb(s)
Stock quantity: 2

1782. 20 GA, Pop-up Trip Lever Bath Drain

Patented pre-adjustable linkageCast brass pop-up and shoe plugHeavy duty, highly polished face plateExtra long plunger strokePatented Heavy duty cast red brass head, tee and shoeModel G0041806

Price: 84.31 USD
SKU: 4655
Weight: 5.20 lb(s)
Stock quantity: 3

1783. 20 GA, Trip Lever Bath Drain

Patented pre-adjustable linkage Heavy duty cast red brass head, tee and shoeCast brass shoe plugExtra long plunger strokeLubricated cast brass plungerChrome plated stamped brass domed strainerHeavy duty, highly polished face plateModel G0041818

Price: 74.25 USD
SKU: 4642
Weight: 4.86 lb(s)
Stock quantity: 1

1784. 20" Stainless Steel Braided Connector 3/8" Comp. x 1/2" IPS

Temperature rating: 40° to 140°F, intermittent to 180°F Pressure rating: 125 psi maximum IAPMO and CSA listed to ASME A112.18.6/CSA B125.6 Quick and easy installation- No special tools; no soldering No pipe bending- Flexible connectors simplify installation- even in cramped spaces

Price: 2.86 USD
SKU: 2737
Weight: 0.26 lb(s)
Stock quantity: 195

1785. 20" Stainless Steel Braided Toilet Connector 3/8" Comp. x 7/8" IPS

Plastic BallcockTemperature rating: 40° to 140°F, intermittent to 180°FPressure rating: 125 psi maximum IAPMO and CSA listed to ASME A112.18.6/CSA B125.6

Price: 5.95 USD
SKU: 3468
Weight: 0.30 lb(s)
Stock quantity: 150

1786. 200 psi Pressure Gauge

Price: 5.20 USD
SKU: 4474
Weight: 0.24 lb(s)
Stock quantity: 37

1787. 2-1/2 x 1-1/4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 13.09 USD
SKU: 3545
Weight: 1.93 lb(s)
Stock quantity: 0

1788. 2-1/2 x 2" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 8.73 USD
SKU: 297
Weight: 1.90 lb(s)
Stock quantity: 16

1789. 2-1/2" 1" Copper x 2-1/2" Cast Copper Union

Price: 74.25 USD
SKU: 1832
Weight: 2.16 lb(s)
Stock quantity: 5

1790. 2-1/2" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 15.25 USD
SKU: 3135
Weight: 0.46 lb(s)
Stock quantity: 33

1791. 2-1/2" Black 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 13.14 USD
SKU: 3056
Weight: 3.10 lb(s)
Stock quantity: 10

1792. 2-1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 12.20 USD
SKU: 2578
Weight: 3.55 lb(s)
Stock quantity: 6

1793. 2-1/2" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 16.00 USD
SKU: 3137
Weight: 3.50 lb(s)
Stock quantity: 2

1794. 2-1/2" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 8.32 USD
SKU: 441
Weight: 1.60 lb(s)
Stock quantity: 5

1795. 2-1/2" Black Cast Iron Steam 45° Elbow (Imported)

Price: 30.36 USD
SKU: 1251
Weight: 4.28 lb(s)
Stock quantity: 1

1796. 2-1/2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 23.03 USD
SKU: 1027
Weight: 4.30 lb(s)
Stock quantity: 8

1797. 2-1/2" Black Cast Iron Steam Tee (Imported)

Price: 38.16 USD
SKU: 1015
Weight: 3.78 lb(s)
Stock quantity: 4

1798. 2-1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 13.90 USD
SKU: 169
Weight: 2.49 lb(s)
Stock quantity: 11

1799. 2-1/2" Black Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 4.25 USD
SKU: 394
Weight: 1.10 lb(s)
Stock quantity: 6

1800. 2-1/2" Black Street 45° Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 19.13 USD
SKU: 4489
Weight: 2.80 lb(s)
Stock quantity: 5

1801. 2-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 16.56 USD
SKU: 294
Weight: 4.78 lb(s)
Stock quantity: 2

1802. 2-1/2" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 29.38 USD
SKU: 329
Weight: 3.66 lb(s)
Stock quantity: 3

1803. 2-1/2" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 48.94 USD
SKU: 2352
Weight: 3.70 lb(s)

1804. 2-1/2" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 24.03 USD
SKU: 4232
Weight: 1.70 lb(s)
Stock quantity: 2

1805. 2-1/2" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 34.21 USD
SKU: 1492
Weight: 2.61 lb(s)
Stock quantity: 1

1806. 2-1/2" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 14.44 USD
SKU: 1454
Weight: 1.21 lb(s)
Stock quantity: 1

1807. 2-1/2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 59.25 USD
SKU: 1275
Weight: 4.90 lb(s)
Stock quantity: 1

1808. 2-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 30.25 USD
SKU: 2035
Weight: 2.04 lb(s)
Stock quantity: 9

1809. 2-1/2" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 26.56 USD
SKU: 8630
Weight: 0.42 lb(s)
Stock quantity: -2

1810. 2-1/2" Copper 45° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 16.75 USD
SKU: 1993
Weight: 1.22 lb(s)

1811. 2-1/2" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 17.44 USD
SKU: 2010
Weight: 1.35 lb(s)

1812. 2-1/2" Copper Caps

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 13.20 USD
SKU: 1872
Weight: 0.50 lb(s)

1813. 2-1/2" Copper Coupling (Socket) w/Tube Stop

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 9.85 USD
SKU: 1917
Weight: 0.60 lb(s)
Stock quantity: 13

1814. 2-1/2" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 2.51 USD
SKU: 4048
Weight: 0.69 lb(s)
Stock quantity: 50

1815. 2-1/2" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69

Price: 4.27 USD
SKU: 1325
Weight: 1.09 lb(s)
Stock quantity: 88

1816. 2-1/2" Copper Epoxy Coated Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 2.56 USD
SKU: 5185
Weight: 0.45 lb(s)
Stock quantity: 18

1817. 2-1/2" Copper Epoxy Coated Strut Clamp

Price: 2.22 USD
SKU: 1958
Weight: 0.35 lb(s)
Stock quantity: 90

1818. 2-1/2" Copper Slip Coupling (Socket)

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 7.09 USD
SKU: 1957
Weight: 0.63 lb(s)
Stock quantity: 8

1819. 2-1/2" Copper x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 8.42 USD
SKU: 366
Weight: 0.58 lb(s)
Stock quantity: 0

1820. 2-1/2" Copper x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 7.80 USD
SKU: 3672
Weight: 0.58 lb(s)
Stock quantity: 14

1821. 2-1/2" Copper x 3/8" Wall Thickness x 6 ft. Length Thermacell Insulation

Price: 8.25 USD
SKU: 862
Weight: 0.26 lb(s)
Stock quantity: 0

1822. 2-1/2" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 43.96 USD
SKU: 2140
Weight: 1.30 lb(s)

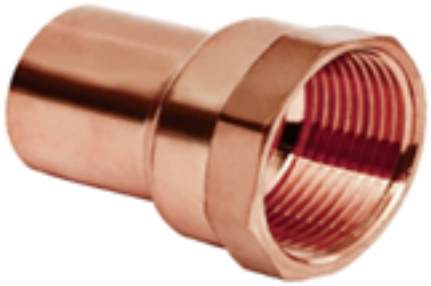

1823. 2-1/2" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 35.89 USD
SKU: 2164
Weight: 1.27 lb(s)

1824. 2-1/2" FTG x Copper 45° Street Elbow

Conforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 22.90 USD
SKU: 3046
Weight: 1.20 lb(s)

1825. 2-1/2" FTG x Copper 90° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 22.28 USD
SKU: 2635
Weight: 1.36 lb(s)

1826. 2-1/2" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 23.95 USD
SKU: 2871
Weight: 3.11 lb(s)
Stock quantity: 0

1827. 2-1/2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 16.56 USD
SKU: 17
Weight: 3.55 lb(s)
Stock quantity: 2

1828. 2-1/2" Galvanized 90° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 18.99 USD
SKU: 2897
Weight: 3.49 lb(s)
Stock quantity: 0

1829. 2-1/2" Galvanized Cap

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.51 USD
SKU: 2880
Weight: 1.60 lb(s)
Stock quantity: 0

1830. 2-1/2" Galvanized Clevis Hanger

Pipe Size: 2-1/2"Max. Rec. Load: 1350 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 2.26 USD
SKU: 1504
Weight: 0.72 lb(s)
Stock quantity: 88

1831. 2-1/2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 16.37 USD
SKU: 3036
Weight: 2.49 lb(s)
Stock quantity: 0

1832. 2-1/2" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 3.80 USD

SKU: 8489

Weight: 1.89 lb(s)

Stock quantity: 102

1833. 2-1/2" Galvanized Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 2.38 USD
SKU: 1200
Weight: 0.45 lb(s)
Stock quantity: 37

1834. 2-1/2" Galvanized Strut Clamp

Price: 1.20 USD
SKU: 1474
Weight: 0.39 lb(s)
Stock quantity: 48

1835. 2-1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 25.79 USD
SKU: 64
Weight: 4.78 lb(s)
Stock quantity: 1

1836. 2-1/2" Galvanized Two Hole Strap

Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.May be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4” X 1” tek type screwsApprovals: Underwriters Laboratories listed for US and Canada.

Price: 1.07 USD
SKU: 1721
Weight: 0.20 lb(s)
Stock quantity: 25

1837. 2-1/2" Galvanized Union

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 38.86 USD
SKU: 3171
Weight: 3.66 lb(s)
Stock quantity: 1

1838. 2-1/2" Grooved Butterfly Control Valve

Approvals:UL, ULC, FM Factory installed UL Listed and FM Approved Double Tamper Switch for indoor and outdoor use

Price: 209.25 USD
SKU: 755
Weight: 19.84 lb(s)
Stock quantity: 1

1839. 2-1/2" Grooved Butterfly Valve

300 PSIMaximum Working Temperature 200° F

Price: 219.74 USD
SKU: 113
Weight: 7.50 lb(s)
Stock quantity: 4

1840. 2-1/2" Grooved Check Valve

For use up to 250 psi working pressure at 70°FFor horizontal and vertical installationLeak-tight sealMeets the ASTM A126 Made of durable cast iron, with a stainless-steel clapper, and E.P.D.M rubber facing

Price: 124.44 USD
SKU: 4126
Weight: 9.00 lb(s)

1841. 2-1/2" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 5.56 USD
SKU: 135
Weight: 1.90 lb(s)
Stock quantity: 49

1842. 2-1/2" Grooved Split Flange

Made of durable, high-strength ductile iron comforming to ASTM A536

Price: 29.41 USD
SKU: 4227
Weight: 4.50 lb(s)
Stock quantity: 6

1843. 2-1/2" Hose Angle Valve

Connection: Female x Male

Price: 85.80 USD
SKU: 2680
Weight: 1.00 lb(s)
Stock quantity: 12

1844. 2-1/2" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 88.83 USD

SKU: 2665

Weight: 6.70 lb(s)

Stock quantity: 1

1845. 2-1/2" IPS Gate Valve

Pressure rating 200 psi wogTemperaure rating is 180°FCast brass constructionConforms to NSF / ANSI 372, AB 1953

Price: 78.19 USD
SKU: 3688
Weight: 7.10 lb(s)
Stock quantity: 2

1846. 2-1/2" IPS Swing Check Valve

Lead FreeCast Brass swing check valve125 WSP, 200 WOGApproved By UPC, NSF

Price: 51.60 USD
SKU: 4370
Weight: 4.60 lb(s)

1847. 2-1/2" IPS x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 8.42 USD
SKU: 3434
Weight: 0.58 lb(s)
Stock quantity: 0

1848. 2-1/2" IPS x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 7.81 USD
SKU: 4726
Weight: 0.58 lb(s)
Stock quantity: -20

1849. 2-1/2" IPS x 2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 21.52 USD
SKU: 4448
Weight: 0.58 lb(s)
Stock quantity: 0

1850. 2-1/2" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 525 lbs.Pipe Size: 2-1/2"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69

Price: 0.66 USD

SKU: 1889

Weight: 0.19 lb(s)

Stock quantity: 198

1851. 2-1/2" Standard Grooved 45° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 6.51 USD
SKU: 183
Weight: 2.20 lb(s)
Stock quantity: 26

1852. 2-1/2" Standard Grooved 90° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 7.62 USD
SKU: 201
Weight: 3.00 lb(s)
Stock quantity: 29

1853. 2-1/2" Standard Grooved Cap

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 6.17 USD
SKU: 280
Weight: 0.37 lb(s)
Stock quantity: 35

1854. 2-1/2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 9.86 USD
SKU: 464
Weight: 4.40 lb(s)
Stock quantity: 69

1855. 2-1/2" Sweat Ball Valve

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 73.76 USD
SKU: 3681
Weight: 6.72 lb(s)
Stock quantity: 3

1856. 2-1/2" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 112.08 USD
SKU: 8501
Weight: 6.72 lb(s)
Stock quantity: 7

1857. 2-1/2" Sweat Brass Flange

Price: 63.71 USD
SKU: 4245
Weight: 3.24 lb(s)
Stock quantity: 4

1858. 2-1/2" Sweat Check Valve

For installing on copper pipe using standard copper soldering methodArrow on the valve body shows direction of the flowSuitable for upright horizontal and vertical (arrow pointing upward) installations in plumbing and heating systems Pressure Ratings: 200 psi Non-Shock WOGConstruction: Lead-Free Brass Body

Price: 47.01 USD
SKU: 1780
Weight: 4.40 lb(s)

1859. 2-1/2" Waterflow Alarm Switch with Retard

NEMA 4/IP54 Rated Enclosure suitable for indoor or outdoor use with factory installed gasket and die-cast housing when used with appropriate conduit fittingTemperature Range: 40°F - 120°FNon-corrosive sleeve factory installed in saddle

Price: 158.99 USD
SKU: 4522
Weight: 3.84 lb(s)
Stock quantity: 3

1860. 2-1/2" x 1" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 3.87 USD
SKU: 4002
Weight: 1.11 lb(s)
Stock quantity: 1

1861. 2-1/2" x 1" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 10.80 USD
SKU: 341
Weight: 1.88 lb(s)
Stock quantity: 2

1862. 2-1/2" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 25.02 USD
SKU: 110
Weight: 3.15 lb(s)
Stock quantity: 5

1863. 2-1/2" x 1" Copper Reducer Coupling

Price: 16.50 USD
SKU: 1945
Weight: 0.56 lb(s)
Stock quantity: 2

1864. 2-1/2" x 1" FTG x C Copper Reducer Fitting Adapter

Price: 15.67 USD
SKU: 1978
Weight: 0.55 lb(s)
Stock quantity: 4

1865. 2-1/2" x 1" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.45 USD
SKU: 3524
Weight: 1.11 lb(s)
Stock quantity: 0

1866. 2-1/2" x 1" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 13.09 USD
SKU: 3037
Weight: 1.88 lb(s)
Stock quantity: 0

1867. 2-1/2" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 24.28 USD
SKU: 2985
Weight: 3.15 lb(s)
Stock quantity: 0

1868. 2-1/2" x 1" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 11.46 USD
SKU: 285
Weight: 2.70 lb(s)
Stock quantity: 52

1869. 2-1/2" x 1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 4.52 USD
SKU: 4404
Weight: 0.98 lb(s)
Stock quantity: 5

1870. 2-1/2" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 19.58 USD
SKU: 3958
Weight: 2.81 lb(s)
Stock quantity: 2

1871. 2-1/2" x 1/2" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.45 USD
SKU: 4831
Weight: 0.98 lb(s)
Stock quantity: 0

1872. 2-1/2" x 10' SCH 10 Black Pipe GG

Price: 36.72 USD
SKU: 1100
Stock quantity: 96

1873. 2-1/2" x 10' SCH 40 Black Pipe

Price: 65.14 USD
SKU: 1089
Stock quantity: 39

1874. 2-1/2" x 10' SCH 40 Black Pipe GG

Price: 64.80 USD
SKU: 7619
Stock quantity: 0

1875. 2-1/2" x 10' SCH 40 Galvanized Pipe

Price: 60.25 USD
SKU: 4330
Stock quantity: 2

1876. 2-1/2" x 10' Type L Copper Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.80"

Price: 106.95 USD
SKU: 2642
Weight: 24.80 lb(s)
Stock quantity: 18

1877. 2-1/2" x 10" " Copper M Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.065"

Price: 105.00 USD
SKU: 4680
Weight: 20.30 lb(s)
Stock quantity: 0

1878. 2-1/2" x 1-1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 15.46 USD
SKU: 2679
Weight: 2.28 lb(s)
Stock quantity: 2

1879. 2-1/2" x 1-1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 4.00 USD
SKU: 2524
Weight: 1.21 lb(s)
Stock quantity: 5

1880. 2-1/2" x 1-1/2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 26.43 USD
SKU: 1049
Weight: 4.30 lb(s)
Stock quantity: 0

1881. 2-1/2" x 1-1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 12.17 USD
SKU: 162
Weight: 2.06 lb(s)
Stock quantity: 4

1882. 2-1/2" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 18.16 USD
SKU: 107
Weight: 3.52 lb(s)
Stock quantity: 8

1883. 2-1/2" x 1-1/2" Copper Reducer Coupling

Price: 15.27 USD
SKU: 1944
Weight: 0.54 lb(s)
Stock quantity: 4

1884. 2-1/2" x 1-1/2" FTG x C Copper Reducer Fitting Adapter

Price: 14.09 USD
SKU: 1976
Weight: 0.54 lb(s)
Stock quantity: 2

1885. 2-1/2" x 1-1/2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 20.54 USD
SKU: 29
Weight: 2.39 lb(s)
Stock quantity: 0

1886. 2-1/2" x 1-1/2" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 8.21 USD
SKU: 2857
Weight: 1.21 lb(s)
Stock quantity: 0

1887. 2-1/2" x 1-1/2" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 13.37 USD
SKU: 3038
Weight: 2.06 lb(s)
Stock quantity: 0

1888. 2-1/2" x 1-1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 24.28 USD
SKU: 2987
Weight: 3.52 lb(s)
Stock quantity: 0

1889. 2-1/2" x 1-1/2" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 15.77 USD
SKU: 274
Weight: 3.30 lb(s)
Stock quantity: 33

1890. 2-1/2" x 1-1/2" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 20.80 USD
SKU: 4229
Weight: 1.20 lb(s)
Stock quantity: 0

1891. 2-1/2" x 1-1/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 4.55 USD
SKU: 245
Weight: 1.12 lb(s)
Stock quantity: 3

1892. 2-1/2" x 1-1/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 10.80 USD
SKU: 2534
Weight: 1.93 lb(s)
Stock quantity: 1

1893. 2-1/2" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 25.02 USD
SKU: 55
Weight: 3.31 lb(s)
Stock quantity: 6

1894. 2-1/2" x 1-1/4" Copper Reducer Coupling

Price: 16.50 USD
SKU: 3062
Weight: 0.55 lb(s)
Stock quantity: 6

1895. 2-1/2" x 1-1/4" FTG x C Copper Reducer Fitting Adapter

Price: 14.34 USD
SKU: 1977
Weight: 0.55 lb(s)
Stock quantity: 6

1896. 2-1/2" x 1-1/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.45 USD
SKU: 4816
Weight: 1.12 lb(s)
Stock quantity: 0

1897. 2-1/2" x 1-1/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 24.28 USD
SKU: 2986
Weight: 3.31 lb(s)
Stock quantity: 0

1898. 2-1/2" x 1-1/4" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 15.88 USD
SKU: 256
Weight: 3.10 lb(s)
Stock quantity: 18

1899. 2-1/2" x 1-1-2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 15.72 USD
SKU: 3259
Weight: 4.00 lb(s)
Stock quantity: 0

1900. 2-1/2" x 2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 13.50 USD
SKU: 377
Weight: 2.82 lb(s)
Stock quantity: 6

1901. 2-1/2" x 2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 4.41 USD
SKU: 243
Weight: 1.17 lb(s)
Stock quantity: 2

1902. 2-1/2" x 2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 29.03 USD
SKU: 1056
Weight: 4.30 lb(s)
Stock quantity: 1

1903. 2-1/2" x 2" Black Cast Iron Steam Tee (Imported)

Price: 32.20 USD
SKU: 1568
Weight: 4.60 lb(s)
Stock quantity: 5

1904. 2-1/2" x 2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 8.55 USD
SKU: 163
Weight: 2.28 lb(s)
Stock quantity: 5

1905. 2-1/2" x 2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 22.61 USD
SKU: 62
Weight: 3.93 lb(s)
Stock quantity: 8

1906. 2-1/2" x 2" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 47.76 USD
SKU: 1358
Weight: 2.90 lb(s)
Stock quantity: 0

1907. 2-1/2" x 2" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 18.69 USD
SKU: 1458
Weight: 1.28 lb(s)
Stock quantity: 1

1908. 2-1/2" x 2" Copper Reducer Coupling

Price: 14.62 USD
SKU: 1943
Weight: 0.59 lb(s)
Stock quantity: 3

1909. 2-1/2" x 2" FTG x C Copper Reducer Fitting Adapter

Price: 14.03 USD
SKU: 1975
Weight: 0.59 lb(s)
Stock quantity: 3

1910. 2-1/2" x 2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 18.36 USD
SKU: 46
Weight: 2.74 lb(s)
Stock quantity: 0

1911. 2-1/2" x 2" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 6.28 USD
SKU: 2799
Weight: 1.17 lb(s)
Stock quantity: 1

1912. 2-1/2" x 2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 11.63 USD
SKU: 3039
Weight: 2.28 lb(s)
Stock quantity: 0

1913. 2-1/2" x 2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 30.96 USD
SKU: 2988
Weight: 3.93 lb(s)
Stock quantity: 0

1914. 2-1/2" x 2" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 13.64 USD
SKU: 1270
Weight: 1.10 lb(s)
Stock quantity: 37

1915. 2-1/2" x 2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 18.29 USD
SKU: 73
Weight: 3.80 lb(s)
Stock quantity: 7

1916. 2-1/2" x 2" Steam Coupling (Domestic)

Price: 31.82 USD
SKU: 1174
Weight: 1.20 lb(s)
Stock quantity: 6

1917. 2-1/2" x 2" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 44.37 USD
SKU: 2113
Weight: 1.36 lb(s)

1918. 2-1/2" x 2" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 44.20 USD
SKU: 5578
Weight: 1.56 lb(s)

1919. 2-1/2" x 2" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 45.38 USD
SKU: 2110
Weight: 1.93 lb(s)

1920. 2-1/2" x 2" x 2-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 46.91 USD
SKU: 2109
Weight: 2.09 lb(s)

1921. 2-1/2" x 2-1/2" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 36.23 USD
SKU: 2106
Weight: 1.44 lb(s)

1922. 2-1/2" x 2-1/2" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 36.23 USD
SKU: 2108
Weight: 1.21 lb(s)

1923. 2-1/2" x 2-1/2" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 35.06 USD
SKU: 2104
Weight: 1.76 lb(s)

1924. 2-1/2" x 2-1/2" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 35.06 USD
SKU: 2105
Weight: 1.61 lb(s)

1925. 2-1/2" x 2-1/2" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 36.23 USD
SKU: 2103
Weight: 1.92 lb(s)

1926. 2-1/2" x 2-1/2" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 34.81 USD
SKU: 2107
Weight: 1.31 lb(s)

1927. 2-1/2" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 30.97 USD
SKU: 1727
Weight: 1.09 lb(s)
Stock quantity: 0

1928. 2-1/2" x 3" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 6.39 USD
SKU: 3657
Weight: 1.49 lb(s)
Stock quantity: 3

1929. 2-1/2" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 6.24 USD
SKU: 682
Weight: 1.49 lb(s)
Stock quantity: 7

1930. 2-1/2" x 3/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 4.00 USD
SKU: 246
Weight: 1.06 lb(s)
Stock quantity: 4

1931. 2-1/2" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 24.93 USD
SKU: 3808
Weight: 2.86 lb(s)
Stock quantity: 5

1932. 2-1/2" x 3/4" Fire Hose Adapter

Price: 27.81 USD
SKU: 4043
Weight: 1.00 lb(s)
Stock quantity: 1

1933. 2-1/2" x 3/4" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 5.45 USD
SKU: 4824
Weight: 1.06 lb(s)
Stock quantity: 0

1934. 2-1/2" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 38.07 USD
SKU: 1728
Weight: 1.34 lb(s)
Stock quantity: 1

1935. 2-1/2" x 3-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 7.41 USD
SKU: 3347
Weight: 1.74 lb(s)
Stock quantity: 2

1936. 2-1/2" x 3-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 7.39 USD
SKU: 570
Weight: 1.74 lb(s)
Stock quantity: 9

1937. 2-1/2" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 40.28 USD
SKU: 1729
Weight: 1.59 lb(s)
Stock quantity: 0

1938. 2-1/2" x 4" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 7.47 USD
SKU: 3289
Weight: 2.05 lb(s)
Stock quantity: 2

1939. 2-1/2" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 7.31 USD
SKU: 550
Weight: 2.05 lb(s)
Stock quantity: 11

1940. 2-1/2" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 44.62 USD
SKU: 1730
Weight: 1.84 lb(s)
Stock quantity: 4

1941. 2-1/2" x 4-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 8.30 USD
SKU: 3353
Weight: 2.37 lb(s)
Stock quantity: 1

1942. 2-1/2" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 8.29 USD
SKU: 557
Weight: 2.37 lb(s)
Stock quantity: 0

1943. 2-1/2" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 48.56 USD
SKU: 1731
Weight: 2.09 lb(s)
Stock quantity: 0

1944. 2-1/2" x 5" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 7.66 USD
SKU: 3363
Weight: 2.67 lb(s)
Stock quantity: 2

1945. 2-1/2" x 5" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 8.19 USD
SKU: 558
Weight: 2.67 lb(s)
Stock quantity: 10

1946. 2-1/2" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 52.06 USD
SKU: 1732
Weight: 2.34 lb(s)
Stock quantity: 1

1947. 2-1/2" x 5-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 8.53 USD
SKU: 3665
Weight: 2.98 lb(s)
Stock quantity: 7

1948. 2-1/2" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 8.56 USD
SKU: 560
Weight: 2.98 lb(s)
Stock quantity: 12

1949. 2-1/2" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 56.65 USD
SKU: 1733
Weight: 2.59 lb(s)
Stock quantity: 2

1950. 2-1/2" x 6" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 9.22 USD
SKU: 3677
Weight: 3.33 lb(s)
Stock quantity: 2

1951. 2-1/2" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 8.19 USD
SKU: 561
Weight: 3.33 lb(s)
Stock quantity: 9

1952. 2-1/2" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 22.17 USD
SKU: 1726
Weight: 0.84 lb(s)
Stock quantity: 0

1953. 2-1/2" x Close Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 6.15 USD
SKU: 3703
Weight: 1.19 lb(s)
Stock quantity: 5

1954. 2-1/2" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 6.36 USD
SKU: 681
Weight: 1.19 lb(s)
Stock quantity: 9

1955. 2-1/4" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 12.99 USD
SKU: 3143
Weight: 0.46 lb(s)
Stock quantity: 0

1956. 2-1/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 12.99 USD
SKU: 4578
Weight: 0.44 lb(s)
Stock quantity: 0

1957. 2-1/8" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 23.37 USD
SKU: 8628
Weight: 0.40 lb(s)
Stock quantity: 3

1958. 2-11/16" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 27.55 USD
SKU: 8633
Weight: 0.54 lb(s)
Stock quantity: 2

1959. 22 GA, Lavatory Drain Pop-up Assembly

Price: 19.00 USD
SKU: 3896
Weight: 0.94 lb(s)
Stock quantity: 6

1960. 2-3/4" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 14.17 USD
SKU: 3127
Weight: 0.46 lb(s)
Stock quantity: 0

1961. 2-3/4" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 27.74 USD
SKU: 8634
Weight: 0.54 lb(s)
Stock quantity: 3

1962. 2-3/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 12.99 USD
SKU: 7674
Weight: 0.44 lb(s)
Stock quantity: 1

1963. 2-3/8" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 25.84 USD
SKU: 8629
Weight: 0.40 lb(s)
Stock quantity: 2

1964. 24" Aluminum End Wrench

Price: 128.86 USD
SKU: 6625
Weight: 5.00 lb(s)
Stock quantity: 2

1965. 25" Single Bowl Top Mount Stainless Steel Sink

Sound-deadening pad(s) minimizes sound and vibration for a quieter time at the sinkMounting clips placed inside the channel before installation mean less time under the sink for an easier installStraight sidewalls give the sink a flat bottom and offer more usable space for stacking, soaking and washing dishes; easy to clean

Price: 46.50 USD
SKU: 3397
Weight: 10.00 lb(s)
Stock quantity: 1

1966. 25" Single Bowl Top Mount Stainless Steel Sink

Sound-deadening pad(s) minimizes sound and vibration for a quieter time at the sinkMounting clips placed inside the channel before installation mean less time under the sink for an easier installStraight sidewalls give the sink a flat bottom and offer more usable space for stacking, soaking and washing dishes; easy to clean

Price: 29.25 USD
SKU: 2361
Weight: 10.00 lb(s)
Stock quantity: 5

1967. 25" Tape Measures

Built-in shock bumper reducing impact when rewinding Double-sided full steel hook. The slotted feature allows you to hook onto a nailStainless steel case with full surround anti-slip rubber offers more durability and comfort while easily resisting impactsHeavy-duty, 2-sided nylon-coated blade, resists abrasion and breakageSuperior blade-to-hook strengthWide blades featuring large numbers for easier readingDurable stainless steel belt clip

Price: 24.43 USD
SKU: 5444
Weight: 1.00 lb(s)
Stock quantity: 42

1968. 25.4 oz. Permabond Pipe Sealant Adhesive

Price: 53.75 USD
SKU: 638
Weight: 2.00 lb(s)
Stock quantity: 0

1969. 2-5/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 15.35 USD
SKU: 1734
Weight: 0.46 lb(s)
Stock quantity: 30

1970. 2-5/8" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 27.08 USD
SKU: 8632
Weight: 0.54 lb(s)
Stock quantity: 0

1971. 2-7/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 14.17 USD
SKU: 2612
Weight: 0.46 lb(s)
Stock quantity: 0

1972. 2-9/16" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 26.98 USD
SKU: 8631
Weight: 0.54 lb(s)
Stock quantity: 1

1973. 3 lbs. Sta Put Plumbers Putty

A plumbing sealing and caulking compound for setting plumbing fixtures, bowls, faucets, basin cocks, strainers, plugs, and sink frames. Will not stick to fingers or hands. Always the same smooth, uniform appearance from top to bottom of container with superior sealing qualities. Sta put will not harden, crumble, crack or shrink. It is flexible and stretchable, spreads easily, and can be molded into rings or shaped to the precise configuration needed. It provides a gas proof, fume proof, odor proof, insect proof and watertight seal. Meets Federal Specification TT-P-1536

Price: 6.02 USD
SKU: 1796
Weight: 3.24 lb(s)
Stock quantity: 5

1974. 3 Zone Expandable Switching Relay w/ Priority (ZSR103)

Compatible with 2, 3 and 4-wire thermostats or other low voltage controllers with switching action120 VAC inputHeavy duty, sealed, fuse protected relay (with spare fuse)1 primary pump output and 3 to 6 (model dependent) zone pump outputs (120 VAC/5 A each)Zone priority selectable with 1-hour time-out featureConvenient R,W,C and T,T,COM dual labeling at thermostat terminalsDHW (ZR/ZC) dry contacts rated for switching line voltageHigh capacity 12 VA or 20 VA transformer (model dependent)Automatic resettable fuse on 24 V circuitSelectable post purgeSelectable pump exercising3 pump ground terminals for simplified wiringExpandable to unlimited number of zones using simple 3-wire connection between controlsLarge screw terminals for ease of wiringFront panel LED indicator light for functional statusETL certified to CSA and UL standards

Price: 204.26 USD

SKU: 5329

Weight: 2.00 lb(s)

Stock quantity: 1

1975. 3 Zone Valve Relay Control (AZ-3)

Transformer Voltage: 120V, 60 HZ, 40VA End Switch Contact Rating: 5A-1/8 HP @120VALED diagnostic lights for easy troubleshootingClearly marked terminal for easy and accurate installation

Price: 158.42 USD
SKU: 6218
Weight: 4.75 lb(s)
Stock quantity: 2

1976. 3" 2021BP Toilet Repairs-Large Fits TOTO

Fits 3" flush valve openingFlapper made of chlorine resistant rubberReplacement for TOTO flapper model THU138S This type of toilet flapper is made of flexible rubber for a tight seal and easy to installThe 2021 toilet parts include: large 3 inch flapper and stainless steel chain

Price: 11.09 USD
SKU: 8742
Weight: 0.50 lb(s)
Stock quantity: 16

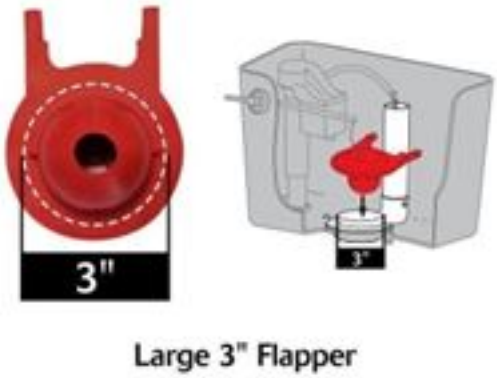

1977. 3" 2022BP Toilet Flapper Repairs Large, Blue

Fits 3" flush valve openingFlapper made of flexible rubberReplacement for TOTO flapper model THU138S This type of toilet flapper is made of flexible rubber for a tight seal and easy to installThe 2021 toilet parts include: large 3 inch flapper and stainless steel chain

Price: 11.09 USD
SKU: 8743
Weight: 0.50 lb(s)
Stock quantity: 15

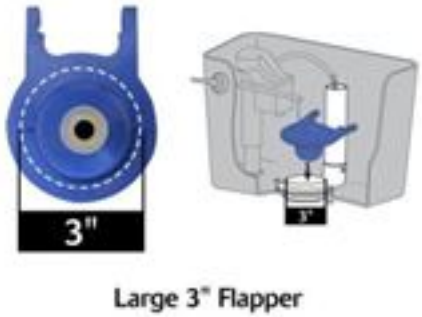

1978. 3" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 14.64 USD
SKU: 2499
Weight: 0.59 lb(s)
Stock quantity: 0

1979. 3" Black 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 21.78 USD
SKU: 2757
Weight: 4.42 lb(s)
Stock quantity: 12

1980. 3" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 20.70 USD
SKU: 287
Weight: 5.30 lb(s)
Stock quantity: 12

1981. 3" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 23.85 USD
SKU: 272
Weight: 5.18 lb(s)
Stock quantity: 2

1982. 3" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 11.86 USD
SKU: 433
Weight: 2.27 lb(s)
Stock quantity: 8

1983. 3" Black Cast Iron Steam 45° Elbow (Imported)

Price: 41.33 USD
SKU: 1280
Weight: 6.00 lb(s)
Stock quantity: 3

1984. 3" Black Cast Iron Steam 90° Elbow (Imported)

Price: 47.70 USD
SKU: 1062
Weight: 6.20 lb(s)
Stock quantity: 9

1985. 3" Black Cast Iron Steam Tee (Imported)

Price: 56.49 USD
SKU: 1021
Weight: 6.20 lb(s)
Stock quantity: 2

1986. 3" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 16.06 USD
SKU: 161
Weight: 3.55 lb(s)
Stock quantity: 11

1987. 3" Black J HOOK

Price: 4.62 USD
SKU: 4032
Stock quantity: 0

1988. 3" Black Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 7.92 USD
SKU: 406
Weight: 1.61 lb(s)
Stock quantity: 6

1989. 3" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 29.86 USD
SKU: 63
Weight: 6.90 lb(s)
Stock quantity: 15

1990. 3" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 42.39 USD
SKU: 6475
Weight: 4.83 lb(s)
Stock quantity: 2

1991. 3" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 57.00 USD
SKU: 4744
Weight: 5.40 lb(s)
Stock quantity: 1

1992. 3" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 44.90 USD
SKU: 3511
Weight: 2.37 lb(s)
Stock quantity: 1

1993. 3" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 37.54 USD
SKU: 4286
Weight: 3.67 lb(s)
Stock quantity: 1

1994. 3" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 23.31 USD
SKU: 1303
Weight: 1.71 lb(s)
Stock quantity: 1

1995. 3" Brass Union

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 89.67 USD
SKU: 4295
Weight: 4.90 lb(s)
Stock quantity: 2

1996. 3" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 47.44 USD
SKU: 2036
Weight: 3.29 lb(s)
Stock quantity: 11

1997. 3" Carbide-Tipped Wood & Metal Hole Saw

60 mm (2-3/8 in.) cutting depth for 40% deeper holes in 1 pass and increased productivityFits with Snap-Lock Plus™ mandrel system allowing a quick and easy change with no down timeMandrel fits all Diablo hole saws, from 5/8 in. to 6 in. diameter

Price: 28.12 USD
SKU: 8635
Weight: 0.62 lb(s)
Stock quantity: -8

1998. 3" Copper x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 9.32 USD
SKU: 4337
Weight: 0.80 lb(s)
Stock quantity: 0

1999. 3" Copper 45° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 25.00 USD
SKU: 1994
Weight: 1.81 lb(s)

2000. 3" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 19.23 USD
SKU: 2011
Weight: 1.95 lb(s)

2001. 3" Copper Caps

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 18.71 USD
SKU: 1873
Weight: 0.74 lb(s)

2002. 3" Copper Coupling (Socket) w/Tube Stop

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 14.31 USD
SKU: 1918
Weight: 0.50 lb(s)
Stock quantity: 8

2003. 3" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 2.88 USD
SKU: 1330
Weight: 0.77 lb(s)
Stock quantity: 80

2004. 3" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69

Price: 4.42 USD
SKU: 1332
Weight: 1.17 lb(s)
Stock quantity: 43

2005. 3" Copper Epoxy Coated Split Ring Hanger

Price: 3.89 USD
SKU: 1324
Weight: 0.55 lb(s)
Stock quantity: 22

2006. 3" Copper Epoxy Coated Strut Clamp

Price: 2.24 USD
SKU: 2028
Weight: 0.40 lb(s)
Stock quantity: 81

2007. 3" Copper Slip Coupling (Socket)

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 14.29 USD
SKU: 3587
Weight: 0.99 lb(s)

2008. 3" Copper Two Hole Strap

Price: 0.63 USD
SKU: 4315
Weight: 0.50 lb(s)
Stock quantity: 0

2009. 3" Copper x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 8.44 USD
SKU: 3679
Weight: 0.80 lb(s)
Stock quantity: 30

2010. 3" Copper x 3" Cast Copper Union

Price: 130.43 USD
SKU: 4670
Weight: 3.78 lb(s)
Stock quantity: 1

2011. 3" Copper x 3/8" Wall Thickness 6 ft. Length Thermacell Insulation

Price: 9.90 USD
SKU: 4403
Weight: 0.30 lb(s)
Stock quantity: 0

2012. 3" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 65.18 USD
SKU: 2141
Weight: 1.68 lb(s)

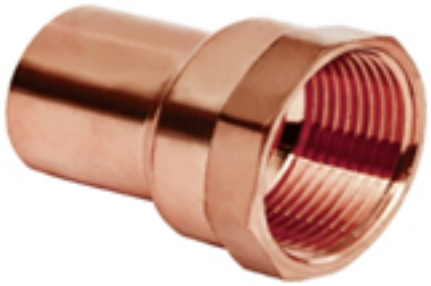

2013. 3" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 47.02 USD
SKU: 2165
Weight: 1.81 lb(s)

2014. 3" EJECTOR Check Valve

Vertical or horizontal installation Full-flow design, no restrictions Stops backflow of waterStandard, 1-1/4”, 1-1/2”, 2”, 3” female NPT pipe Neoprene polyester, reinforced flapper, smooth edge design, with cast iron and non-corrosive metal backing plates and stainless steel fastenerCorrosion-resistant, powder coated epoxy finishRated at 50 PSI (115’ [35 m] of head) at 130 °F (54 °C)Stainless steel boltsSuitable for installation below basin cover

Price: 66.56 USD

SKU: 3900

Weight: 5.00 lb(s)

2015. 3" Flexible Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 3.59 USD
SKU: 3093
Weight: 0.70 lb(s)
Stock quantity: 3

2016. 3" Flexible Pipe Cap

Rated for underground Flexes with ground movement Flexible Connectors are leak-proof, rot-proof and sealed against infiltration and exfiltrationConforms to CSA B602, certified and UPC approved

Price: 2.91 USD
SKU: 2667
Weight: 0.34 lb(s)
Stock quantity: 52

2017. 3" FTG x Copper 45° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 30.99 USD
SKU: 3084
Weight: 1.85 lb(s)

2018. 3" FTG x Copper 90° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 33.96 USD
SKU: 3076
Weight: 2.16 lb(s)

2019. 3" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 40.01 USD
SKU: 2872
Weight: 4.39 lb(s)
Stock quantity: 4

2020. 3" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 32.56 USD
SKU: 2859
Weight: 5.33 lb(s)
Stock quantity: 7

2021. 3" Galvanized 90° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 28.67 USD
SKU: 2898
Weight: 5.19 lb(s)
Stock quantity: 0

2022. 3" Galvanized Cap

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 10.31 USD
SKU: 2881
Weight: 2.27 lb(s)
Stock quantity: 0

2023. 3" Galvanized Clevis Hanger

Pipe Size: 3"Max. Rec. Load: 1350 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 2.15 USD
SKU: 3632
Weight: 0.78 lb(s)
Stock quantity: 138

2024. 3" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 25.15 USD
SKU: 3040
Weight: 3.55 lb(s)
Stock quantity: 1

2025. 3" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 4.27 USD

SKU: 8474

Weight: 1.99 lb(s)

Stock quantity: 142

2026. 3" Galvanized Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 3.55 USD
SKU: 1545
Weight: 0.55 lb(s)
Stock quantity: 14

2027. 3" Galvanized Strut Clamp

Price: 1.47 USD
SKU: 1491
Weight: 0.46 lb(s)
Stock quantity: 110

2028. 3" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 23.83 USD
SKU: 2989
Weight: 6.91 lb(s)
Stock quantity: 0

2029. 3" Galvanized Two Hole Strap

Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.May be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4” X 1” tek type screwsApprovals: Underwriters Laboratories listed for US and Canada.

Price: 1.19 USD
SKU: 1736
Weight: 0.50 lb(s)
Stock quantity: 7

2030. 3" Galvanized Union

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 42.80 USD
SKU: 3172
Weight: 4.83 lb(s)
Stock quantity: 0

2031. 3" Grooved Butterfly Control Valve

Approvals:UL, ULC, FM Factory installed UL Listed and FM Approved Double Tamper Switch for indoor and outdoor use

Price: 210.80 USD
SKU: 352
Weight: 20.94 lb(s)
Stock quantity: 3

2032. 3" Grooved Butterfly Valve

300 PSIMaximum Working Temperature 200° F

Price: 271.91 USD
SKU: 156
Weight: 9.00 lb(s)
Stock quantity: 1

2033. 3" Grooved Check Valve

For use up to 250 psi working pressure at 70°FFor horizontal and vertical installationLeak-tight sealMeets the ASTM A126 Made of durable cast iron, with a stainless-steel clapper, and E.P.D.M rubber facing

Price: 131.03 USD
SKU: 4276
Weight: 10.00 lb(s)

2034. 3" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 6.34 USD
SKU: 424
Weight: 2.40 lb(s)
Stock quantity: 88

2035. 3" Grooved Split Flange

Made of durable, high-strength ductile iron comforming to ASTM A536

Price: 30.52 USD
SKU: 3593
Weight: 5.50 lb(s)
Stock quantity: 2

2036. 3" Husky Coupling (4000 Series)

Extra width for lateral supportAdditional sealing clamps for better load distribution and a more positive seal304 stainless steel heavy duty construction. Shield color coated orangeMeets ASTM C-1540 standard specification for Heavy Duty shielded couplings

Price: 10.06 USD
SKU: 4219
Weight: 0.80 lb(s)
Stock quantity: 87

2037. 3" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 120.47 USD
SKU: 2480
Weight: 8.60 lb(s)
Stock quantity: 3

2038. 3" IPS Brass Flange

Price: 89.91 USD
SKU: 4009
Weight: 4.10 lb(s)
Stock quantity: 2

2039. 3" IPS Gate Valve

Pressure rating 200 psi wogTemperaure rating is 180°FCast brass constructionConforms to NSF / ANSI 372, AB 1953

Price: 113.10 USD
SKU: 3185
Weight: 9.00 lb(s)
Stock quantity: 0

2040. 3" IPS Swing Check Valve

Lead FreeCast Brass swing check valve125 WSP, 200 WOGApproved By UPC, NSF

Price: 84.00 USD
SKU: 3131
Weight: 6.60 lb(s)

2041. 3" IPS x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 9.32 USD
SKU: 4345
Weight: 0.80 lb(s)
Stock quantity: 0

2042. 3" IPS x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 8.44 USD
SKU: 3440
Weight: 0.80 lb(s)
Stock quantity: 8

2043. 3" IPS x 2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 22.87 USD
SKU: 4366
Weight: 0.80 lb(s)
Stock quantity: 0

2044. 3" No Adjustable Shower Drain w/ Square Top

High resistance to both corrosion and abrasion

Price: 45.60 USD
SKU: 5496
Weight: 5.60 lb(s)
Stock quantity: 13

2045. 3" No Hub Adjustable Floor Drain

Cast iron threaded adjustable adaptorRound polished bronze

Price: 65.88 USD
SKU: 4212
Weight: 4.50 lb(s)
Stock quantity: 0

2046. 3" No Hub Cast Iron 1/16 Bend

Cast-iron constructionMinimum service temperature 32°F and Maximum 212°FIAPMO certified and NSF listed Excellent sound-deadening qualitiesWithout a hubNot intended for pressure use

Price: 7.27 USD
SKU: 6528
Weight: 2.11 lb(s)
Stock quantity: 12

2047. 3" No Hub Cast Iron 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 8.53 USD
SKU: 6551
Weight: 3.70 lb(s)
Stock quantity: 40

2048. 3" No Hub Cast Iron 1/8 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 5.48 USD
SKU: 6555
Weight: 2.90 lb(s)
Stock quantity: 65

2049. 3" No Hub Cast Iron Blind Cap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 5.15 USD
SKU: 7515
Weight: 1.10 lb(s)
Stock quantity: 22

2050. 3" No Hub Cast Iron Cleanout Ferrule with Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 18.24 USD
SKU: 7634
Weight: 2.31 lb(s)
Stock quantity: 5

2051. 3" No Hub Cast Iron Cleanout Tee With Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 23.29 USD
SKU: 7518
Weight: 6.31 lb(s)
Stock quantity: 8

2052. 3" No Hub Cast Iron Double 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 25.63 USD
SKU: 7633
Weight: 7.10 lb(s)
Stock quantity: 3

2053. 3" No Hub Cast Iron Double Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 25.59 USD
SKU: 7631
Weight: 7.64 lb(s)
Stock quantity: 0

2054. 3" No Hub Cast Iron Double Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 29.52 USD
SKU: 7632
Weight: 7.90 lb(s)
Stock quantity: 3

2055. 3" No Hub Cast Iron Long Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 18.69 USD
SKU: 7519
Weight: 9.40 lb(s)
Stock quantity: 0

2056. 3" No Hub Cast Iron P-Trap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 16.94 USD
SKU: 6570
Weight: 8.90 lb(s)
Stock quantity: 19

2057. 3" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 9.40 USD
SKU: 6568
Weight: 5.80 lb(s)
Stock quantity: 108

2058. 3" No Hub Cast Iron Short Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 9.27 USD
SKU: 7520
Weight: 6.30 lb(s)
Stock quantity: 16

2059. 3" No Hub Cast Iron Upright Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 21.61 USD
SKU: 7635
Weight: 9.50 lb(s)
Stock quantity: 0

2060. 3" No Hub Cast Iron Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 9.45 USD
SKU: 6565
Weight: 6.05 lb(s)
Stock quantity: 35

2061. 3" No Hub Floor Drain

Pressure rating: maximum 4.3 PSI Temperature rating: minimum 32°F, maximum 212°FHigh resistance to both corrosion and abrasion

Price: 15.00 USD
SKU: 4686
Weight: 4.12 lb(s)
Stock quantity: 13

2062. 3" No Hub Floor Drain w/ Trap Primer

Pressure rating: maximum 4.3 PSI Temperature rating: minimum 32°F, maximum 212°FHigh resistance to both corrosion and abrasion Image may not represent actual product

Price: 91.42 USD
SKU: 5264
Weight: 4.12 lb(s)
Stock quantity: 0

2063. 3" No Hub Heavy Duty Coupling

Standard couplings shall conform to the requirements contained in the latest edition of ASTM C1540Shield assembly, clamp, band, and screw housing shall be made from series 301 stainless steel, and the screw made from series 304 stainless steelGaskets shall comply with requirements contained in the latest edition of ASTM C564

Price: 6.08 USD
SKU: 824
Weight: 0.60 lb(s)
Stock quantity: 109

2064. 3" No Hub Roof Drain

High resistance to both corrosion and abrasion

Price: 42.13 USD
SKU: 414
Weight: 15.10 lb(s)
Stock quantity: 5

2065. 3" No-Hub Coupling

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certifiedCouplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310Neoprene rubber gasket meets/exceeds ASTM C 564Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 2.28 USD
SKU: 5371
Weight: 0.35 lb(s)
Stock quantity: 929

2066. 3" Premium Universal Flapper

The Flapper is adjustable to match your original toilet's performance It has a universal design and will fit oversized 3" flush valves found in newer 1.6 and 1.28 gpf toilets since the year 2005The exclusive longest lasting red rubber resists chlorine, bacteria, city water treatment, hard water, and well water The adjustable toilet tank flapper has multiple settings to ensure it fits popular 3" toilet models including: Kohler, TOTO, American Standard, Gerber and MansfieldMade of flexible rubber for a tight seal and easy to install, the 3060 toilet parts include: (1) Adjustable 3 inch Flapper and (1) Stainless Steel Chain.

Price: 16.11 USD
SKU: 8387
Weight: 0.50 lb(s)
Stock quantity: 19

2067. 3" PVC Check Valve

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 46.50 USD
SKU: 2711
Weight: 1.70 lb(s)

2068. 3" PVC DWV 45° Elbow (HUB x HUB)

Sometimes called a "Street Eighth Bend".Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 3.15 USD
SKU: 802
Weight: 1.00 lb(s)
Stock quantity: 36

2069. 3" PVC DWV 45° Street Elbows (HUB x SPIGOT)

Sometimes called a "Street Eighth Bend".Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 3.09 USD
SKU: 849
Weight: 0.90 lb(s)
Stock quantity: 20

2070. 3" PVC DWV 90° Elbow

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 3.69 USD
SKU: 6526
Weight: 1.40 lb(s)
Stock quantity: 47

2071. 3" PVC DWV 90° Elbow (w/ 2" Side Inlet)

Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.00 USD
SKU:

2072. 3" PVC DWV 90° Street Elbow (HUB x SPIGOT)

Sometimes called a "Street Quarter Bend". Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 3.96 USD
SKU: 994
Weight: 1.10 lb(s)
Stock quantity: 16

2073. 3" PVC DWV Cap (HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 4.54 USD
SKU: 827
Weight: 0.45 lb(s)
Stock quantity: 20

2074. 3" PVC DWV Coupling

Maximum service temperature 140°FDo not test or use with compressed air or other gasesHub x hub connectionsASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.80 USD
SKU: 6541
Weight: 0.55 lb(s)
Stock quantity: 28

2075. 3" PVC DWV Double Sanitary Tee (ALL HUB)

Price: 12.39 USD
SKU: 920
Weight: 1.90 lb(s)
Stock quantity: 2

2076. 3" PVC DWV Double Wye (ALL HUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 13.79 USD
SKU: 900
Weight: 2.40 lb(s)
Stock quantity: 2

2077. 3" PVC DWV Female Adapter (HUB x FIP)

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 3.69 USD
SKU: 832
Weight: 0.60 lb(s)
Stock quantity: 4

2078. 3" PVC DWV Male Adapter

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedSize range 1¼" to 4"

Price: 2.61 USD
SKU: 963
Weight: 0.45 lb(s)
Stock quantity: 8

2079. 3" PVC DWV P-Trap

Maximum service temperature 140°FMaximum working pressure of 5 psiDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 13.14 USD
SKU: 936
Weight: 3.00 lb(s)
Stock quantity: 1

2080. 3" PVC DWV Sanitary Tee (HUB x HUB x HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 5.22 USD
SKU: 912
Weight: 1.65 lb(s)
Stock quantity: 21

2081. 3" PVC DWV Wye (HUB x HUB xHUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness

Price: 6.30 USD
SKU: 1011
Weight: 1.95 lb(s)
Stock quantity: 11

2082. 3" Shielded Transition Coupling (Cast Iron to Copper)

Corrosion-resistant 300 Series stainless steel componentMaximum working pressure of 4.3 psi Neoprene rubber sleeve conforms to ASTM C 564Certified to ASTM C-1460, CSA B602

Price: 6.27 USD
SKU: 4539
Weight: 0.44 lb(s)
Stock quantity: 0

2083. 3" Shielded Transition Coupling (Cast Iron to PVC, Steel, Extra Heavy Cast Iron)

Corrosion-resistant 300 Series stainless steel componentMaximum working pressure of 4.3 psi Neoprene rubber sleeve conforms to ASTM C 564Certified to ASTM C-1460, CSA B602

Price: 6.75 USD
SKU: 2337
Weight: 0.44 lb(s)
Stock quantity: 51

2084. 3" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 525 lbs.Pipe Size: 3"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69

Price: 0.94 USD
SKU: 1897
Weight: 0.23 lb(s)
Stock quantity: 151

2085. 3" Standard Grooved 45° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 9.81 USD
SKU: 3265
Weight: 3.20 lb(s)
Stock quantity: 20

2086. 3" Standard Grooved 90° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 11.53 USD
SKU: 417
Weight: 4.25 lb(s)
Stock quantity: 34

2087. 3" Standard Grooved Cap

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 5.26 USD
SKU: 3457
Weight: 0.52 lb(s)
Stock quantity: 7

2088. 3" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 11.60 USD
SKU: 3345
Weight: 6.50 lb(s)
Stock quantity: 9

2089. 3" Sweat Ball Valve

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 106.03 USD
SKU: 3523
Weight: 8.66 lb(s)
Stock quantity: 0

2090. 3" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 133.09 USD
SKU: 8512
Weight: 8.66 lb(s)
Stock quantity: 9

2091. 3" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 235.13 USD
SKU: 8578
Weight: 8.66 lb(s)
Stock quantity: 0

2092. 3" Sweat Brass Flange

Price: 85.12 USD
SKU: 4142
Weight: 4.10 lb(s)
Stock quantity: 0

2093. 3" Sweat Check Valve

For installing on copper pipe using standard copper soldering methodArrow on the valve body shows direction of the flowSuitable for upright horizontal and vertical (arrow pointing upward) installations in plumbing and heating systems Pressure Ratings: 200 psi Non-Shock WOGConstruction: Lead-Free Brass Body

Price: 81.60 USD

SKU: 3229

Weight: 6.20 lb(s)

2094. 3" Test Plug

Large wing nut for easy operationGalvanized steel flange with molded rubber gasket

Price: 3.23 USD
SKU: 2317
Weight: 0.40 lb(s)
Stock quantity: 23

2095. 3" Waterflow Alarm Switch with Retard

NEMA 4/IP54 Rated Enclosure suitable for indoor or outdoor use with factory installed gasket and die-cast housing when used with appropriate conduit fittingTemperature Range: 40°F - 120°FNon-corrosive sleeve factory installed in saddle

Price: 158.99 USD
SKU: 4864
Weight: 4.60 lb(s)
Stock quantity: 1

2096. 3" x 1" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 6.53 USD
SKU: 3877
Weight: 1.45 lb(s)
Stock quantity: 0

2097. 3" x 1" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 16.13 USD
SKU: 205
Weight: 2.67 lb(s)
Stock quantity: 2

2098. 3" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 23.40 USD
SKU: 301
Weight: 4.40 lb(s)
Stock quantity: 2

2099. 3" x 1" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 17.75 USD
SKU: 3041
Weight: 2.67 lb(s)
Stock quantity: 0

2100. 3" x 1" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 13.18 USD
SKU: 3271
Weight: 3.60 lb(s)
Stock quantity: 30

2101. 3" x 10' Innoflue Pipe

Price: 36.75 USD
SKU: 8545
Stock quantity: 22

2102. 3" x 10' SCH 10 Black Pipe GG

Price: 48.21 USD
SKU: 1101
Stock quantity: 98

2103. 3" x 10' SCH 40 Black Pipe

Price: 76.95 USD
SKU: 1090
Stock quantity: 13

2104. 3" x 10' SCH 40 Black Pipe GG

Price: 102.60 USD
SKU: 7618
Stock quantity: 0

2105. 3" x 10' SCH 40 Galvanized Pipe

Price: 81.00 USD
SKU: 4256
Stock quantity: 6

2106. 3" x 10' SCH 40 PVC DWV Pipe

Price: 17.02 USD
SKU: 1004
Stock quantity: 24

2107. 3" x 10' Type L Copper Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.90"

Price: 158.68 USD
SKU: 2186
Weight: 33.30 lb(s)
Stock quantity: 14

2108. 3" x 10" Copper M Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.072"

Price: 135.10 USD
SKU: 4688
Weight: 26.80 lb(s)
Stock quantity: 0

2109. 3" x 10" No Hub Cast Iron Pipe

Cast-iron construction 212° F maximum working temperature For non-pressure applications Noncombustible and offers superior sound-deadening performance Conform to ASTM A 888 and CISPI Standard 301

Price: 56.03 USD
SKU: 6409
Weight: 54.00 lb(s)
Stock quantity: 43

2110. 3" x 1-1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 21.01 USD
SKU: 2540
Weight: 3.08 lb(s)
Stock quantity: 0

2111. 3" x 1-1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 5.67 USD
SKU: 363
Weight: 1.72 lb(s)
Stock quantity: 13

2112. 3" x 1-1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 16.25 USD
SKU: 204
Weight: 2.89 lb(s)
Stock quantity: 2

2113. 3" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 26.12 USD
SKU: 108
Weight: 4.83 lb(s)
Stock quantity: 4

2114. 3" x 1-1/2" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 34.23 USD
SKU: 1193
Weight: 1.82 lb(s)
Stock quantity: 0

2115. 3" x 1-1/2" Copper Reducer Coupling

Price: 20.63 USD
SKU: 1964
Weight: 0.95 lb(s)
Stock quantity: 3

2116. 3" x 1-1/2" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 7.04 USD
SKU: 3752
Weight: 1.72 lb(s)
Stock quantity: 0

2117. 3" x 1-1/2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 17.42 USD
SKU: 3043
Weight: 2.89 lb(s)
Stock quantity: 0

2118. 3" x 1-1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 32.94 USD
SKU: 2994
Weight: 4.83 lb(s)
Stock quantity: 0

2119. 3" x 1-1/2" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 16.86 USD
SKU: 174
Weight: 4.20 lb(s)
Stock quantity: 48

2120. 3" x 1-1/2" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 10.91 USD
SKU: 460
Weight: 1.30 lb(s)
Stock quantity: 0

2121. 3" x 1-1/2" PVC DWV Reducer Coupling (HUBxHUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness.Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 3.78 USD
SKU: 4876
Weight: 0.45 lb(s)
Stock quantity: 2

2122. 3" x 1-1/2" PVC DWV Wye (HUBxHUBxHUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness

Price: 4.14 USD
SKU: 5859
Weight: 1.80 lb(s)
Stock quantity: 1

2123. 3" x 1-1/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 4.73 USD
SKU: 244
Weight: 1.56 lb(s)
Stock quantity: 1

2124. 3" x 1-1/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 16.65 USD
SKU: 209
Weight: 2.74 lb(s)
Stock quantity: 1

2125. 3" x 1-1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 23.40 USD
SKU: 322
Weight: 4.63 lb(s)
Stock quantity: 2

2126. 3" x 1-1/4" Copper Reducer Coupling

Price: 24.29 USD
SKU: 2013
Weight: 1.04 lb(s)
Stock quantity: 2

2127. 3" x 1-1/4" FTG x C Copper Reducer Fitting Adapter

Price: 18.89 USD
SKU: 3124
Weight: 1.04 lb(s)
Stock quantity: 2

2128. 3" x 1-1/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 7.16 USD
SKU: 4844
Weight: 1.56 lb(s)
Stock quantity: 0

2129. 3" x 1-1/4" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 14.25 USD
SKU: 450
Weight: 3.90 lb(s)
Stock quantity: 18

2130. 3" x 12' Innoflue Pipe

Price: 6.60 USD
SKU: 8259
Stock quantity: 6

2131. 3" x 2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 26.10 USD
SKU: 2889
Weight: 3.78 lb(s)
Stock quantity: 2

2132. 3" x 2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 6.77 USD
SKU: 361
Weight: 1.98 lb(s)
Stock quantity: 7

2133. 3" x 2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 69.67 USD
SKU: 897
Weight: 6.20 lb(s)
Stock quantity: 2

2134. 3" x 2" Black Cast Iron Steam Tee (Imported)

Price: 71.77 USD
SKU: 1319
Weight: 6.20 lb(s)
Stock quantity: 3

2135. 3" x 2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 13.50 USD
SKU: 332
Weight: 2.97 lb(s)
Stock quantity: 0

2136. 3" x 2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 28.82 USD
SKU: 60
Weight: 5.38 lb(s)
Stock quantity: 6

2137. 3" x 2" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 42.00 USD
SKU: 3451
Weight: 2.10 lb(s)
Stock quantity: 0

2138. 3" x 2" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 38.48 USD
SKU: 4584
Weight: 3.10 lb(s)
Stock quantity: 0

2139. 3" x 2" Copper Reducer Coupling

Price: 18.33 USD
SKU: 1947
Weight: 0.87 lb(s)
Stock quantity: 4

2140. 3" x 2" FTG x C Copper Reducer Fitting Adapter

Price: 17.33 USD
SKU: 1980
Weight: 0.87 lb(s)
Stock quantity: 2

2141. 3" x 2" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 7.25 USD
SKU: 3810
Weight: 1.98 lb(s)
Stock quantity: 0

2142. 3" x 2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 16.15 USD
SKU: 3044
Weight: 2.97 lb(s)
Stock quantity: 0

2143. 3" x 2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 32.94 USD
SKU: 2995
Weight: 5.39 lb(s)
Stock quantity: 0

2144. 3" x 2" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 16.35 USD
SKU: 236
Weight: 4.70 lb(s)
Stock quantity: 15

2145. 3" x 2" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 6.49 USD
SKU: 3273
Weight: 1.30 lb(s)
Stock quantity: 12

2146. 3" x 2" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 18.16 USD
SKU: 1274
Weight: 2.00 lb(s)
Stock quantity: 0

2147. 3" x 2" No Hub Cast Iron Double Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 22.85 USD
SKU: 7639
Weight: 6.18 lb(s)
Stock quantity: 4

2148. 3" x 2" No Hub Cast Iron Double Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 22.25 USD
SKU: 7640
Weight: 5.54 lb(s)
Stock quantity: 1

2149. 3" x 2" No Hub Cast Iron Sanitary Tap Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 22.72 USD
SKU: 7641
Weight: 4.90 lb(s)
Stock quantity: 0

2150. 3" x 2" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 7.77 USD
SKU: 6558
Weight: 3.70 lb(s)
Stock quantity: 43

2151. 3" x 2" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 2.75 USD
SKU: 7521
Weight: 1.76 lb(s)
Stock quantity: 11

2152. 3" x 2" No Hub Cast Iron Upright Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 15.48 USD
SKU: 7642
Weight: 5.70 lb(s)
Stock quantity: 0

2153. 3" x 2" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 6.00 USD
SKU: 6562
Weight: 4.53 lb(s)
Stock quantity: 36

2154. 3" x 2" PVC DWV Double Sanitary Tee (ALL HUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 7.31 USD
SKU: 1213
Weight: 3.20 lb(s)
Stock quantity: 2

2155. 3" x 2" PVC DWV Double Wye (ALL HUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 9.45 USD
SKU: 921
Weight: 1.30 lb(s)
Stock quantity: 1

2156. 3" x 2" PVC DWV Reducer Coupling (HUBxHUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness.Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 2.55 USD
SKU: 2609
Weight: 0.45 lb(s)
Stock quantity: 8

2157. 3" x 2" PVC DWV Sanitary Tee (HUB x HUB x HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 4.05 USD
SKU: 1263
Weight: 1.05 lb(s)
Stock quantity: 22

2158. 3" x 2" PVC DWV Wye (HUBxHUBxHUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness

Price: 5.24 USD
SKU: 4325
Weight: 1.35 lb(s)
Stock quantity: 14

2159. 3" x 2" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 3.94 USD
SKU: 2513
Weight: 0.56 lb(s)
Stock quantity: 6

2160. 3" x 2" Reducing No-Hub Coupling

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certifiedCouplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310Neoprene rubber gasket meets/exceeds ASTM C 564Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 3.75 USD

SKU: 954

Weight: 0.70 lb(s)

Stock quantity: 6

2161. 3" x 2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 18.12 USD
SKU: 186
Weight: 6.00 lb(s)
Stock quantity: 13

2162. 3" x 2" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 61.30 USD
SKU: 6037
Weight: 2.79 lb(s)

2163. 3" x 2" x 3" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 37.44 USD
SKU: 6091
Stock quantity: 0

2164. 3" x 2" x 3" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 66.00 USD
SKU: 3091
Weight: 3.18 lb(s)

2165. 3" x 2-1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 28.96 USD
SKU: 3471
Weight: 4.62 lb(s)
Stock quantity: 2

2166. 3" x 2-1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 7.92 USD
SKU: 350
Weight: 1.92 lb(s)
Stock quantity: 2

2167. 3" x 2-1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 16.29 USD
SKU: 199
Weight: 3.38 lb(s)
Stock quantity: 1

2168. 3" x 2-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 23.85 USD
SKU: 59
Weight: 6.06 lb(s)
Stock quantity: 2

2169. 3" x 2-1/2" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 35.58 USD
SKU: 8339
Weight: 2.02 lb(s)
Stock quantity: 0

2170. 3" x 2-1/2" Copper Reducer Coupling

Price: 19.24 USD
SKU: 1946
Weight: 0.95 lb(s)
Stock quantity: 5

2171. 3" x 2-1/2" FTG x C Copper Reducer Fitting Adapter

Price: 17.69 USD
SKU: 1979
Weight: 0.95 lb(s)
Stock quantity: 2

2172. 3" x 2-1/2" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 17.42 USD
SKU: 3045
Weight: 3.38 lb(s)
Stock quantity: 0

2173. 3" x 2-1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 37.01 USD
SKU: 2996
Weight: 6.07 lb(s)
Stock quantity: 0

2174. 3" x 2-1/2" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 9.37 USD
SKU: 3272
Weight: 1.30 lb(s)
Stock quantity: 6

2175. 3" x 2-1/2" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 8.94 USD
SKU: 3984
Weight: 2.00 lb(s)
Stock quantity: 8

2176. 3" x 2-1/2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 23.57 USD
SKU: 300
Weight: 5.53 lb(s)
Stock quantity: 17

2177. 3" x 2-1/2" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 66.74 USD
SKU: 2124
Weight: 2.71 lb(s)

2178. 3" x 2-1/2" x 2-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 63.61 USD
SKU: 4046
Weight: 2.53 lb(s)

2179. 3" x 24' Flue Pipe

Price: 3.72 USD
SKU: 1786
Stock quantity: 23

2180. 3" x 24' Innoflue Pipe

Price: 12.23 USD
SKU: 8260
Stock quantity: 15

2181. 3" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 31.34 USD
SKU: 1747
Weight: 1.53 lb(s)
Stock quantity: 0

2182. 3" x 3" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 8.41 USD
SKU: 3691
Weight: 2.05 lb(s)
Stock quantity: 1

2183. 3" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 7.88 USD
SKU: 746
Weight: 2.05 lb(s)
Stock quantity: 5

2184. 3" x 3" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 38.78 USD
SKU: 2120
Weight: 2.28 lb(s)

2185. 3" x 3" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 39.90 USD
SKU: 2122
Weight: 1.92 lb(s)

2186. 3" x 3" x 1/2" Galvanized Knee Bracket

Price: 2.48 USD
SKU: 4714
Weight: 0.20 lb(s)
Stock quantity: 0

2187. 3" x 3" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 39.90 USD
SKU: 2118
Weight: 2.63 lb(s)

2188. 3" x 3" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 39.90 USD
SKU: 2119
Weight: 2.41 lb(s)

2189. 3" x 3" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 39.90 USD
SKU: 2117
Weight: 2.88 lb(s)

2190. 3" x 3" x 2-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 43.68 USD
SKU: 2116
Weight: 3.28 lb(s)

2191. 3" x 3" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 39.90 USD
SKU: 2121
Weight: 2.16 lb(s)

2192. 3" x 3" x 3/8" Black Fish Plate

Price: 3.30 USD
SKU: 1498
Weight: 0.18 lb(s)
Stock quantity: 0

2193. 3" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 30.80 USD
SKU: 3421
Weight: 4.18 lb(s)
Stock quantity: 2

2194. 3" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 46.33 USD
SKU: 1748
Weight: 1.88 lb(s)
Stock quantity: 1

2195. 3" x 3-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 9.84 USD
SKU: 3697
Weight: 2.47 lb(s)
Stock quantity: 2

2196. 3" x 3-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 8.76 USD
SKU: 521
Weight: 2.47 lb(s)
Stock quantity: 7

2197. 3" x 36' Innoflue Pipe

Price: 17.85 USD
SKU: 8261
Stock quantity: 28

2198. 3" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 51.60 USD
SKU: 1749
Weight: 2.24 lb(s)
Stock quantity: 1

2199. 3" x 4" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 9.33 USD
SKU: 3115
Weight: 2.90 lb(s)
Stock quantity: 17

2200. 3" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 9.71 USD
SKU: 522
Weight: 2.90 lb(s)
Stock quantity: 7

2201. 3" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 57.49 USD
SKU: 1750
Weight: 2.60 lb(s)
Stock quantity: 1

2202. 3" x 4-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 10.46 USD
SKU: 3515
Weight: 3.25 lb(s)
Stock quantity: 0

2203. 3" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 8.78 USD
SKU: 507
Weight: 3.25 lb(s)
Stock quantity: 3

2204. 3" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 68.03 USD
SKU: 1751
Weight: 2.95 lb(s)
Stock quantity: 1

2205. 3" x 5" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 10.46 USD
SKU: 3340
Weight: 3.74 lb(s)
Stock quantity: 3

2206. 3" x 5" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 8.78 USD
SKU: 508
Weight: 3.74 lb(s)
Stock quantity: 4

2207. 3" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 72.37 USD
SKU: 1752
Weight: 3.31 lb(s)
Stock quantity: 1

2208. 3" x 5-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 11.07 USD
SKU: 3107
Weight: 4.15 lb(s)
Stock quantity: 1

2209. 3" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 11.49 USD
SKU: 514
Weight: 4.15 lb(s)
Stock quantity: 11

2210. 3" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 57.01 USD
SKU: 1753
Weight: 3.67 lb(s)
Stock quantity: 1

2211. 3" x 6" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 13.92 USD
SKU: 3290
Weight: 4.50 lb(s)
Stock quantity: 0

2212. 3" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 11.10 USD
SKU: 515
Weight: 4.50 lb(s)
Stock quantity: 10

2213. 3" x 72' Innoflue Pipe

Price: 23.07 USD
SKU: 8262
Stock quantity: 9

2214. 3" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 40.24 USD
SKU: 1746
Weight: 1.26 lb(s)
Stock quantity: 2

2215. 3" x Close Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 6.74 USD
SKU: 3651
Weight: 1.75 lb(s)
Stock quantity: 19

2216. 3" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 6.24 USD
SKU: 568
Weight: 1.75 lb(s)
Stock quantity: 6

2217. 3" x1-1/2" FTG x C Copper Reducer Fitting Adapter

Price: 19.32 USD
SKU: 1981
Weight: 0.93 lb(s)
Stock quantity: 2

2218. 3.5 kW Electric Tankless Water Heater

On demand hot water. Flow switch activates heater only on demand (no standby heat loss) Endless hot water – no storage capacity to run out Easy installation. No T&P relief valve needed (check local codes), only one cold water line need be brought to installation, mounts on wall High temperature limit switch with automatic reset Optional flow restricting aerator (for EX-DL models) ensures proper temperature rise. Standard with SP models Ni Chrome element – a unique, patented flow path ensures optimum heat transfer and extended element life Min. Dynamic Operating Pressure: 35 PSI Max. Dynamic Operating Pressure: 150 PSIRhase: SingleAmperage: 29Wire Size: 10 AWGModel: SP3512

Price: 226.80 USD

SKU: 2740

Weight: 4.00 lb(s)

Stock quantity: 2

2219. 3/16" - 15/16" 104 Close Quarters Tubing Cutter

Capacity: 3/16" - 15/16"

Price: 20.48 USD
SKU: 6243
Weight: 0.33 lb(s)
Stock quantity: 1

2220. 3/4 " C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 6.67 USD
SKU: 1857
Weight: 0.32 lb(s)

2221. 3/4 HP Sewage Pump (LE70-Series, Model LE71A2)

Rugged 2 vane, semi-open cast iron impellers Cast iron housings and volute with all stainless and brass fasteners 416 stainless steel rotor shaft Oil-filled, hermetically sealed motors Built-in thermal protection on single phase models 2" or 3" flanged discharge Permanently lubricated upper and lower ball bearings Unitized shaft seals Single float mechanical level control with series plug for manual bypass operation– standard on single-phase automatic models Adjustable pumping range Quick-connect 10' standard power cord allows replacement of cord in seconds without breaking seals to motor (25' and 35’ length optional)Maximum fluid temperature 140˚F

Price: 570.10 USD

SKU: 8448

Weight: 62.00 lb(s)

Stock quantity: 1

2222. 3/4' PEX x 3/4" Sweat Copper Pipe Adapter

Price: 1.63 USD
SKU: 3426
Weight: 0.07 lb(s)
Stock quantity: 0

2223. 3/4" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.67 USD
SKU: 2579
Weight: 0.10 lb(s)
Stock quantity: 2

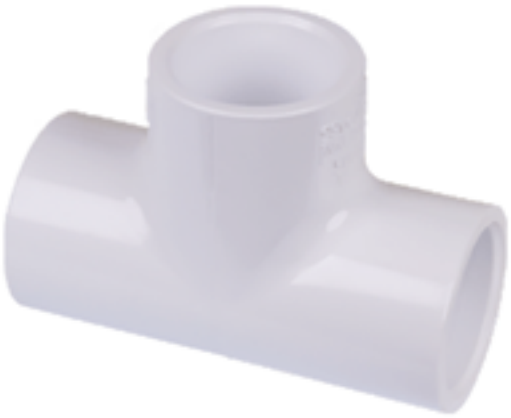

2224. 3/4" Angle Steam Trap

Price: 49.92 USD
SKU: 2424
Weight: 1.10 lb(s)
Stock quantity: 5

2225. 3/4" Angle Thermostatic Radiator Valve

Price: 39.27 USD
SKU: 4875
Weight: 0.93 lb(s)
Stock quantity: 0

2226. 3/4" Ball Drip Valve

Price: 18.75 USD
SKU: 4590
Weight: 0.70 lb(s)
Stock quantity: 9

2227. 3/4" Black 45° Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.31 USD
SKU: 2739
Weight: 0.35 lb(s)
Stock quantity: 140

2228. 3/4" Black 45° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.43 USD
SKU: 3756
Weight: 0.30 lb(s)
Stock quantity: 33

2229. 3/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.30 USD
SKU: 277
Weight: 0.36 lb(s)
Stock quantity: 207

2230. 3/4" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.42 USD
SKU: 3473
Weight: 0.36 lb(s)
Stock quantity: 119

2231. 3/4" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 1.23 USD
SKU: 3285
Weight: 0.19 lb(s)
Stock quantity: 156

2232. 3/4" Black Cast Iron Steam 45° Elbow (Imported)

Price: 3.65 USD
SKU: 932
Weight: 0.50 lb(s)
Stock quantity: 12

2233. 3/4" Black Cast Iron Steam 90° Elbow (Imported)

Price: 2.88 USD
SKU: 903
Weight: 0.60 lb(s)
Stock quantity: 61

2234. 3/4" Black Cast Iron Steam Tee (Imported)

Price: 4.12 USD
SKU: 1315
Weight: 0.74 lb(s)
Stock quantity: 56

2235. 3/4" Black C-Clamp

Material: Carbon steel with hardened steel cup point set screw (Type 304 or 316 Stainless Steel upon request)Finish: Plain or electro-galvanizedApprovals: Underwriters' Laboratories Listed in the U.S. (UL) for 3/8" and 1/2" sizes only. Complies with Federal Specifications A-A-1192A (Type 23)

Price: 2.84 USD

SKU: 1388

Weight: 0.72 lb(s)

Stock quantity: 0

2236. 3/4" Black C-Clamp w/Lock Nut

Material: Carbon steel with hardened steel cup point set screw (Type 304 or 316 Stainless Steel upon request)Finish: Plain or electro-galvanizedApprovals: Underwriters' Laboratories Listed in the U.S. (UL) for 3/8" and 1/2" sizes only. Complies with Federal Specifications A-A-1192A (Type 23) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 23) which supersedes ANSI/MSS SP-69. (Approvals are only for Fig. 250 with locknut).

Price: 2.94 USD

SKU: 1068

Weight: 0.79 lb(s)

Stock quantity: 0

2237. 3/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 2.02 USD
SKU: 189
Weight: 0.29 lb(s)
Stock quantity: 152

2238. 3/4" Black Cross Tee

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 4.63 USD
SKU: 2983
Weight: 0.64 lb(s)
Stock quantity: 1

2239. 3/4" Black Extension

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 4.05 USD
SKU: 273
Weight: 0.24 lb(s)
Stock quantity: 109

2240. 3/4" Black Floor Flange

Floor flange is used to secure pipe to wall or floor mounts for DIY (do-it-yourself) applicationsMeets in ASTM and ANSI standards

Price: 5.63 USD
SKU: 3057
Weight: 0.53 lb(s)
Stock quantity: 22

2241. 3/4" Black Junior Beam Clamp

Max. Pipe Size: 8"Max. Rec. Load: 800 lbs.Approvals: Complies with Federal Specifications A-A1192A (Type 19) and Manufacturers' Standardization Society ANSI/ MSS SPSP-58 (Type 19) which supersedes ANSI/MSS SP-69.

Price: 6.04 USD
SKU: 1472
Weight: 0.63 lb(s)
Stock quantity: 7

2242. 3/4" Black Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 1.10 USD
SKU: 434
Weight: 0.13 lb(s)
Stock quantity: 305

2243. 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 2.16 USD
SKU: 69
Weight: 0.55 lb(s)
Stock quantity: 127

2244. 3/4" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 5.43 USD
SKU: 146
Weight: 0.56 lb(s)
Stock quantity: 98

2245. 3/4" Black Wide Mouth Beam Clamp

Malleable iron with hardened steel cup point set screw and locknutMax. Pipe Size: 8"Max. Rec. Load: 900 lbs.Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL). Complies with Federal Specifications A-A-1192A (Type 19) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 19) which supersedes ANSI/MSS SP-69.

Price: 3.22 USD
SKU: 1400
Weight: 0.87 lb(s)
Stock quantity: 20

2246. 3/4" Boiler Drain Cock

Price: 7.25 USD
SKU: 2487
Weight: 0.30 lb(s)
Stock quantity: 52

2247. 3/4" Brass 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 4.70 USD
SKU: 1166
Weight: 0.50 lb(s)
Stock quantity: 26

2248. 3/4" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 5.33 USD
SKU: 1151
Weight: 0.50 lb(s)
Stock quantity: 17

2249. 3/4" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.15 USD
SKU: 1113
Weight: 0.30 lb(s)
Stock quantity: 46

2250. 3/4" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.45 USD
SKU: 1127
Weight: 0.41 lb(s)
Stock quantity: 24

2251. 3/4" Brass Extension

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.80 USD
SKU: 8552
Weight: 0.35 lb(s)
Stock quantity: 17

2252. 3/4" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.13 USD
SKU: 1411
Weight: 0.23 lb(s)
Stock quantity: 71

2253. 3/4" Brass Street 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.04 USD
SKU: 1426
Weight: 0.46 lb(s)
Stock quantity: 36

2254. 3/4" Brass Street 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 5.25 USD
SKU: 1439
Weight: 0.40 lb(s)
Stock quantity: 7

2255. 3/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.56 USD
SKU: 1463
Weight: 0.67 lb(s)
Stock quantity: 26

2256. 3/4" Brass Union

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 13.81 USD
SKU: 1477
Weight: 0.66 lb(s)
Stock quantity: 7

2257. 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.48 USD
SKU: 2030
Weight: 0.16 lb(s)
Stock quantity: 324

2258. 3/4" C x F x C Tee

C x F x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 6.90 USD
SKU: 1862
Weight: 0.31 lb(s)
Stock quantity: 5

2259. 3/4" Copper 45° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.16 USD
SKU: 1988
Weight: 0.09 lb(s)

2260. 3/4" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.81 USD
SKU: 2005
Weight: 0.10 lb(s)

2261. 3/4" Copper Caps

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.49 USD
SKU: 1867
Weight: 0.05 lb(s)

2262. 3/4" Copper Coupling (Socket) w/Tube Stop

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.54 USD
SKU: 1912
Weight: 0.05 lb(s)
Stock quantity: 435

2263. 3/4" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 0.91 USD
SKU: 1628
Weight: 0.12 lb(s)
Stock quantity: 218

2264. 3/4" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69

Price: 2.05 USD
SKU: 1611
Weight: 0.52 lb(s)
Stock quantity: 64

2265. 3/4" Copper Epoxy Coated Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 0.78 USD
SKU: 1610
Weight: 0.12 lb(s)
Stock quantity: 108

2266. 3/4" Copper Epoxy Coated Strut Clamp

Price: 0.76 USD
SKU: 1515
Weight: 0.10 lb(s)
Stock quantity: 224

2267. 3/4" Copper Female x 3/4" Cast Copper Union

Price: 11.40 USD
SKU: 5287
Weight: 0.38 lb(s)
Stock quantity: 1

2268. 3/4" Copper Male x 3/4" Cast Copper Union

Price: 10.73 USD
SKU: 5292
Weight: 0.38 lb(s)
Stock quantity: 0

2269. 3/4" Copper Slip Coupling (Socket)

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.76 USD
SKU: 1952
Weight: 0.07 lb(s)

2270. 3/4" Copper Two Hole Strap

Price: 0.17 USD
SKU: 1418
Weight: 0.05 lb(s)
Stock quantity: 140

2271. 3/4" Copper x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 5.23 USD
SKU: 4619
Weight: 0.44 lb(s)
Stock quantity: 47

2272. 3/4" Copper x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 4.11 USD
SKU: 689
Weight: 0.44 lb(s)
Stock quantity: 305

2273. 3/4" Copper x 1-1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 9.82 USD
SKU: 4351
Weight: 0.44 lb(s)
Stock quantity: 0

2274. 3/4" Copper x 3/4" Cast Copper Union

Price: 6.86 USD
SKU: 1827
Weight: 0.34 lb(s)
Stock quantity: 81

2275. 3/4" Copper x 3/8" Wall Thickness 6 ft. Length Thermacell Insulation

Price: 3.22 USD
SKU: 3885
Weight: 0.06 lb(s)
Stock quantity: 174

2276. 3/4" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.68 USD
SKU: 2135
Weight: 0.15 lb(s)

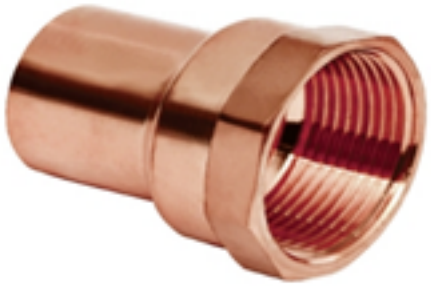

2277. 3/4" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.27 USD
SKU: 2159
Weight: 0.14 lb(s)

2278. 3/4" Double Check Valve

Lead FreeMaximum working pressure 175 psiTemperature range 32°F to 140°FTwo independent check valves provide fail-safe operation preventing contaminated water from entering the potable water supply.

Price: 141.75 USD
SKU: 4810

2279. 3/4" Double Check Valve (U007M3-QT)

Top entryReplaceable seats and seat discsBronze body for durabilityMaximum working pressure 175 psiTemperature range 33°F to 180°FMeets in ASSE Std. 1015, AWWA Std. C510 IAPMO PS31, CSA B64.5 StandardsInquire with governing authorities for local installation requirements

Price: 113.40 USD

SKU: 1156

Weight: 5.00 lb(s)

2280. 3/4" Double Expansion Shield Anchor

Price: 4.13 USD
SKU: 1502
Weight: 0.40 lb(s)
Stock quantity: 0

2281. 3/4" Finish Hex Nut Zinc (Box of 20)

Material: SteelFinish: Zinc

Price: 0.38 USD
SKU: 2014
Weight: 3.00 lb(s)
Stock quantity: 234

2282. 3/4" Fitting Brush w/ Wire Handle

Price: 2.06 USD
SKU: 1431
Weight: 0.08 lb(s)
Stock quantity: 78

2283. 3/4" Float and Thermostatic Steam Trap

Price: 117.36 USD
SKU: 3534
Weight: 12.20 lb(s)
Stock quantity: 0

2284. 3/4" Flow Check Control Valve

Open automatically when the circulator starts running.Maximum operating pressure 125 PSIMaximum operating temperature 277° F

Price: 52.07 USD
SKU: 3674
Weight: 1.10 lb(s)

2285. 3/4" FTG x Copper 45° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.19 USD
SKU: 1997
Weight: 0.09 lb(s)

2286. 3/4" FTG x Copper 90° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.19 USD
SKU: 2021
Weight: 0.10 lb(s)

2287. 3/4" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.51 USD
SKU: 2866
Weight: 0.35 lb(s)
Stock quantity: 0

2288. 3/4" Galvanized 45° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.52 USD
SKU: 2903
Weight: 0.30 lb(s)
Stock quantity: 0

2289. 3/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.25 USD
SKU: 2834
Weight: 0.38 lb(s)
Stock quantity: 15

2290. 3/4" Galvanized 90° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.46 USD
SKU: 2890
Weight: 0.37 lb(s)
Stock quantity: 0

2291. 3/4" Galvanized Beam Clamp

Max. Pipe Size: 8"Max. Rec. Load: 800 lbs.Approvals: Complies with Federal Specifications A-A1192A (Type 19) and Manufacturers' Standardization Society ANSI/ MSS SPSP-58 (Type 19) which supersedes ANSI/MSS SP-69, Canada (CUL)

Price: 6.76 USD
SKU: 938
Weight: 0.63 lb(s)
Stock quantity: 39

2292. 3/4" Galvanized Cap

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.04 USD
SKU: 2875
Weight: 0.20 lb(s)
Stock quantity: 0

2293. 3/4" Galvanized Clevis Hanger

Pipe Size: 3/4"Max. Rec. Load: 730 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 1.07 USD

SKU: 8487

Weight: 0.24 lb(s)

Stock quantity: 60

2294. 3/4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.60 USD
SKU: 3007
Weight: 0.29 lb(s)
Stock quantity: 5

2295. 3/4" Galvanized Drop-In Anchor

Price: 2.23 USD
SKU: 2251
Weight: 0.40 lb(s)
Stock quantity: 4

2296. 3/4" Galvanized One Hole Strap

Price: 0.25 USD
SKU: 3525
Weight: 0.10 lb(s)
Stock quantity: 0

2297. 3/4" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 2.44 USD

SKU: 8488

Weight: 1.05 lb(s)

Stock quantity: 40

2298. 3/4" Galvanized Rod Coupling

Material: Carbon steelFinish: Electro-GalvanizedMax. Rec. Load: 3230 lbs.

Price: 2.12 USD
SKU: 1399
Weight: 0.28 lb(s)
Stock quantity: 0

2299. 3/4" Galvanized Round Washer (Box of 100)

Material: Carbon steelFinish: Electro-galvanized

Price: 0.39 USD
SKU: 1471
Weight: 4.20 lb(s)
Stock quantity: 157

2300. 3/4" Galvanized Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 1.08 USD
SKU: 1098
Weight: 0.16 lb(s)
Stock quantity: 134

2301. 3/4" Galvanized Strut Clamp

Price: 0.63 USD
SKU: 1744
Weight: 0.14 lb(s)
Stock quantity: 105

2302. 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.88 USD
SKU: 2920
Weight: 0.55 lb(s)
Stock quantity: 28

2303. 3/4" Galvanized Two Hole Strap

Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.May be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4” X 1” tek type screwsApprovals: Underwriters Laboratories listed for US and Canada.

Price: 0.23 USD
SKU: 2250
Weight: 0.05 lb(s)
Stock quantity: 223

2304. 3/4" Galvanized Union

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 4.84 USD
SKU: 283
Weight: 0.56 lb(s)
Stock quantity: 4

2305. 3/4" Galvanized Wide Mouth Beam Clamp

Malleable iron with hardened steel cup point set screw and locknutMax. Pipe Size: 8"Max. Rec. Load: 900 lbs.Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL). Complies with Federal Specifications A-A-1192A (Type 19) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 19) which supersedes ANSI/MSS SP-69

Price: 6.76 USD
SKU: 8669
Weight: 0.87 lb(s)
Stock quantity: 0

2306. 3/4" Garden Hose Cap w/ Washer

Price: 1.44 USD
SKU: 4689
Weight: 0.10 lb(s)
Stock quantity: 77

2307. 3/4" Heavy-Duty, Professional Brush

Price: 4.79 USD
SKU: 8844
Weight: 0.30 lb(s)
Stock quantity: 0

2308. 3/4" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 7.14 USD
SKU: 2408
Weight: 0.54 lb(s)
Stock quantity: 36

2309. 3/4" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 9.26 USD
SKU: 7666
Weight: 0.54 lb(s)
Stock quantity: 87

2310. 3/4" IPS Ball Valve (Lead Free)

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 16.20 USD
SKU: 4720
Weight: 0.54 lb(s)
Stock quantity: 39

2311. 3/4" IPS Ball Valve w/ T-Handle

Price: 13.33 USD
SKU: 8600
Weight: 0.60 lb(s)
Stock quantity: 100

2312. 3/4" IPS Brass Flange with Isolating Ball Valve

Price: 24.71 USD
SKU: 3645
Weight: 1.55 lb(s)
Stock quantity: 14

2313. 3/4" IPS Chrome Plated Shallow Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.36 USD
SKU: 3237
Weight: 0.03 lb(s)
Stock quantity: 73

2314. 3/4" IPS Chrome Plated Split Escutcheon

Chrome Plated FinishMade of Steel

Price: 1.04 USD
SKU: 4980
Weight: 0.03 lb(s)
Stock quantity: 44

2315. 3/4" IPS Gate Valve

Pressure rating 200 psi wogTemperaure rating is 180°FCast brass constructionConforms to NSF / ANSI 372, AB 1953

Price: 11.98 USD
SKU: 2438
Weight: 0.70 lb(s)
Stock quantity: 15

2316. 3/4" IPS Long Bonnet Ball Valve

Long Bonnet T- handle allows easy shutoff access Solder Ends Forged brass Body175 psi steam 600 psi WOGTemperature range is 20°F to 240°FCSA Approved

Price: 12.17 USD
SKU: 5408
Weight: 0.70 lb(s)
Stock quantity: 20

2317. 3/4" IPS Long Bonnet Gate Valve

Price: 12.58 USD
SKU: 2781
Weight: 0.90 lb(s)
Stock quantity: 30

2318. 3/4" IPS Plastic Escutcheon

Chrome Plated FinishMade of Plastic

Price: 1.20 USD
SKU: 5198
Weight: 0.03 lb(s)
Stock quantity: 44

2319. 3/4" IPS Radiator Union Elbow

Price: 7.07 USD
SKU: 717
Stock quantity: 15

2320. 3/4" IPS Spirovent w/Removable Vent Head

150 PSI

Price: 85.80 USD
SKU: 4280
Weight: 2.50 lb(s)
Stock quantity: 6

2321. 3/4" IPS Spring Loaded Check Valve

Lead FreeMaximum working pressure 200 psiCast Brass spring check valveStainless steel spring

Price: 14.95 USD
SKU: 4694
Weight: 0.44 lb(s)
Stock quantity: 2

2322. 3/4" IPS Swing Check Valve

Lead FreeCast brass swing check valve125 WSP, 200 WOGApproved By UPC, NSF

Price: 8.91 USD
SKU: 3327
Weight: 0.56 lb(s)
Stock quantity: 22

2323. 3/4" IPS Tankless Water Heater Valve Set

Lead Free H-44443WPR Model500 WOG150 PSI/500,000 BTU/HRCertified to NSF/ANSI 61 & 372

Price: 109.01 USD
SKU: 5436
Weight: 3.20 lb(s)
Stock quantity: 2

2324. 3/4" PEX 90° Elbow

Price: 1.21 USD
SKU: 3743
Weight: 0.07 lb(s)
Stock quantity: 83

2325. 3/4" PEX Clamp (Box of 50)

Stainless Steel

Price: 0.53 USD
SKU: 3692
Weight: 0.80 lb(s)
Stock quantity: 163

2326. 3/4" PEX Coupling

Price: 0.83 USD
SKU: 3758
Weight: 0.07 lb(s)
Stock quantity: 80

2327. 3/4" PEX Tee

Price: 1.70 USD
SKU: 4742
Weight: 0.07 lb(s)
Stock quantity: 25

2328. 3/4" PEX x 1/2" Sweat Copper Pipe Adapter

Price: 0.17 USD
SKU: 7584
Weight: 0.07 lb(s)
Stock quantity: 60

2329. 3/4" PEX x 3/4" Female IPS Adapter

Price: 3.61 USD
SKU: 1118
Weight: 0.07 lb(s)
Stock quantity: 21

2330. 3/4" PEX x 3/4" IPS Drop Ear Elbow

Price: 4.80 USD
SKU: 6041
Weight: 0.10 lb(s)
Stock quantity: 10

2331. 3/4" PEX x 3/4" Male IPS Adapter

Price: 1.93 USD
SKU: 2474
Weight: 0.07 lb(s)
Stock quantity: 3

2332. 3/4" PEX x 3/4" Male IPS Elbow

Price: 4.53 USD
SKU: 1546
Weight: 0.07 lb(s)
Stock quantity: 8

2333. 3/4" PEX x 3/4" Sweat Copper Fitting Adapter

Price: 1.51 USD
SKU: 3765
Weight: 0.07 lb(s)
Stock quantity: 0

2334. 3/4" PEX x 3/4" Sweat Copper Fitting Elbow

Price: 3.29 USD
SKU: 5148
Weight: 0.07 lb(s)
Stock quantity: 15

2335. 3/4" PEX x 3/4" Sweat Copper Pipe Elbow

Price: 3.05 USD
SKU: 3914
Weight: 0.07 lb(s)
Stock quantity: 27

2336. 3/4" Plastic Two Hole Strap

Price: 0.23 USD
SKU: 3604
Weight: 0.01 lb(s)
Stock quantity: 1818

2337. 3/4" Power Deuce Copper Fitting Brush Tool

Cat #628203/4” I.D. (7/8” O.D.)

Price: 8.09 USD
SKU: 8839
Weight: 0.30 lb(s)
Stock quantity: 0

2338. 3/4" PVC Check Valve (Solvent)

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 8.00 USD
SKU: 6059
Weight: 0.30 lb(s)

2339. 3/4" PVC Check Valve (Threaded)

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 8.00 USD
SKU: 50000
Weight: 0.30 lb(s)

2340. 3/4" PVC Pressure 45° Elbow

Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.10 USD
SKU: 3860
Weight: 0.06 lb(s)
Stock quantity: 19

2341. 3/4" PVC Pressure 90° Street Elbow (HUB x SPIGOT)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.46 USD
SKU: 2885
Weight: 0.08 lb(s)
Stock quantity: 21

2342. 3/4" PVC Pressure Cap

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.43 USD
SKU: 1038
Weight: 0.03 lb(s)
Stock quantity: 10

2343. 3/4" PVC Pressure Coupling

Maximum service temperature 140°FDo not test or use with compressed air or other gasesSLIP x SLIP connectionsASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.42 USD
SKU: 2571
Weight: 0.05 lb(s)
Stock quantity: 9

2344. 3/4" PVC Pressure Female Adapter (SLIP x FIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.59 USD
SKU: 2587
Weight: 0.05 lb(s)
Stock quantity: 18

2345. 3/4" PVC Pressure Male Adapter (SLIP x MIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedSize range 1¼" to 4"

Price: 0.44 USD
SKU: 2595
Weight: 0.04 lb(s)
Stock quantity: 4

2346. 3/4" PVC Tube Nailer

Price: 0.21 USD
SKU: 4535
Weight: 0.05 lb(s)
Stock quantity: 200

2347. 3/4" Quarter Turn Boiler Drain Cock

Price: 5.85 USD
SKU: 3835
Weight: 0.30 lb(s)
Stock quantity: 14

2348. 3/4" SCH 40 PVC Ball Valve

Pressure rating is 150 psi at 73°FConnection Type: SolventProvides great strength and resistance to corrosion and chemicalsCompact and lightweight design

Price: 3.06 USD
SKU: 942
Weight: 0.40 lb(s)
Stock quantity: 0

2349. 3/4" Side Mount Angle Thermostatic Radiator Valve

Price: 39.34 USD
SKU: 4389
Weight: 1.05 lb(s)
Stock quantity: 0

2350. 3/4" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 300 lbs.Pipe Size: 3/4"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69, Factory Mutual Approved

Price: 0.41 USD

SKU: 5975

Weight: 0.10 lb(s)

Stock quantity: 25

2351. 3/4" Standard Length Spade Bit

Blue-Groove point and cutting edge for faster chip removal - 4x faster than standard spade bitsDouble cutting spurs scribe the outside of the hole reducing breakout10% larger shank for added durabilityGrooved hex shank prevents slipping in drill chuck or bit extensionFits all standard quick change chucks

Price: 5.61 USD
SKU: 5023
Weight: 0.30 lb(s)
Stock quantity: 11

2352. 3/4" Steam Angle Radiator Valve

Price: 12.48 USD
SKU: 2858
Weight: 1.16 lb(s)
Stock quantity: 26

2353. 3/4" Steam Straight Radiator Valve

Price: 15.49 USD
SKU: 2507
Weight: 1.30 lb(s)
Stock quantity: 21

2354. 3/4" Straight Radiator Air Valve

Price: 12.69 USD
SKU: 661
Weight: 0.26 lb(s)
Stock quantity: 5

2355. 3/4" Straight Steam Trap

Price: 56.32 USD
SKU: 2305
Weight: 1.90 lb(s)
Stock quantity: 3

2356. 3/4" Straight Thermostatic Radiator Valve

Price: 33.65 USD
SKU: 3015
Weight: 0.97 lb(s)
Stock quantity: 1

2357. 3/4" Straight Water Main Vent Valve

Price: 95.92 USD
SKU: 2718
Weight: 1.32 lb(s)
Stock quantity: 1

2358. 3/4" Suspension Clamp

Price: 0.29 USD
SKU: 2917
Weight: 0.01 lb(s)
Stock quantity: 1000

2359. 3/4" Sweat Ball Valve

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 7.56 USD
SKU: 1799
Weight: 0.67 lb(s)
Stock quantity: 55

2360. 3/4" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 16.20 USD
SKU: 4699
Weight: 0.67 lb(s)
Stock quantity: 42

2361. 3/4" Sweat Ball Valve (Lead Free)

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 8.65 USD
SKU: 7660
Weight: 0.67 lb(s)
Stock quantity: 29

2362. 3/4" Sweat Brass Ball Valve w/ Hose Drain & Handle

Price: 20.71 USD
SKU: 5481
Weight: 2.00 lb(s)
Stock quantity: 37

2363. 3/4" Sweat Brass Flange with Isolating Ball Valve

Price: 19.88 USD
SKU: 3544
Weight: 1.50 lb(s)
Stock quantity: 11

2364. 3/4" Sweat Check Valve LF

For installing on copper pipe using standard copper soldering methodArrow on the valve body shows direction of the flowSuitable for upright horizontal and vertical (arrow pointing upward) installations in plumbing and heating systems Pressure Ratings: 200 psi Non-Shock WOGConstruction: Lead-Free Brass Body

Price: 9.42 USD

SKU: 3319

Weight: 0.56 lb(s)

2365. 3/4" Sweat Gate Valve

Price: 11.97 USD
SKU: 2454
Weight: 0.70 lb(s)
Stock quantity: 17

2366. 3/4" Sweat Long Bonnet Ball Valve

Long Bonnet T- handle allows easy shutoff access Solder Ends Forged brass BodyChrome plated ball 175 psi steam 600 psi WOG Temperature range is 20°F to 240°F. CSA Approved

Price: 13.10 USD
SKU: 2725
Weight: 1.00 lb(s)
Stock quantity: 14

2367. 3/4" Sweat Long Bonnet Gate Valve

Price: 13.50 USD
SKU: 2954
Weight: 1.20 lb(s)
Stock quantity: 5

2368. 3/4" Sweat Radiator Union Elbow

Price: 6.14 USD
SKU: 724
Stock quantity: 10

2369. 3/4" Sweat Solder Kit

Polished chrome finish

Price: 5.33 USD
SKU: 3098
Weight: 0.40 lb(s)
Stock quantity: 3

2370. 3/4" Sweat Spirovent w/Removable Vent Head

150 PSI

Price: 88.30 USD
SKU: 691
Weight: 2.50 lb(s)
Stock quantity: 3

2371. 3/4" Sweat Tankless Water Heater Valve Set

Lead FreeH-54443WPR Model500 WOG150 PSI/500,000 BTU/HRCertified to NSF/ANSI 61 & 372

Price: 86.64 USD
SKU: 8557
Weight: 3.20 lb(s)
Stock quantity: 3

2372. 3/4" Sweat Thermostatic Mixing Valve

Temperature Range: 95°F - 131°FStandards: ASSE 1070 ASSE 1017 CSA B125.3 NSF/ANSI-61 NSF/ANSI-372

Price: 89.67 USD
SKU: 4986
Weight: 2.00 lb(s)
Stock quantity: 8

2373. 3/4" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 4.42 USD
SKU: 71
Weight: 0.29 lb(s)
Stock quantity: 1

2374. 3/4" x 1" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.69 USD
SKU: 2605
Weight: 0.22 lb(s)

2375. 3/4" x 1" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 4.97 USD
SKU: 1903
Weight: 0.19 lb(s)

2376. 3/4" x 1" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.29 USD
SKU: 2927
Weight: 0.66 lb(s)
Stock quantity: 3

2377. 3/4" x 1/2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.11 USD
SKU: 12
Weight: 0.32 lb(s)
Stock quantity: 112

2378. 3/4" x 1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.89 USD
SKU: 240
Weight: 0.12 lb(s)
Stock quantity: 87

2379. 3/4" x 1/2" Black Cast Iron Steam 90° Elbow (Imported)

Price: 2.65 USD
SKU: 916
Weight: 0.60 lb(s)
Stock quantity: 67

2380. 3/4" x 1/2" Black Cast Iron Steam Tee (Imported)

Price: 7.69 USD
SKU: 8436
Weight: 0.74 lb(s)
Stock quantity: 35

2381. 3/4" x 1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.74 USD
SKU: 190
Weight: 0.26 lb(s)
Stock quantity: 195

2382. 3/4" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 2.60 USD
SKU: 70
Weight: 0.48 lb(s)
Stock quantity: 24

2383. 3/4" x 1/2" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 5.93 USD
SKU: 1287
Weight: 0.33 lb(s)
Stock quantity: 5

2384. 3/4" x 1/2" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.38 USD
SKU: 1191
Weight: 0.22 lb(s)
Stock quantity: 33

2385. 3/4" x 1/2" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 5.39 USD
SKU: 1250
Weight: 0.38 lb(s)
Stock quantity: 20

2386. 3/4" x 1/2" Brass Flush Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.19 USD
SKU: 5350
Weight: 0.22 lb(s)
Stock quantity: 81

2387. 3/4" x 1/2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 7.78 USD
SKU: 1327
Weight: 0.60 lb(s)
Stock quantity: 13

2388. 3/4" x 1/2" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.07 USD
SKU: 2015
Weight: 0.10 lb(s)

2389. 3/4" x 1/2" Copper Reducer Coupling

Price: 0.96 USD
SKU: 1926
Weight: 0.08 lb(s)
Stock quantity: 413

2390. 3/4" x 1/2" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.66 USD
SKU: 2143
Weight: 0.11 lb(s)

2391. 3/4" x 1/2" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.24 USD
SKU: 2170
Weight: 0.13 lb(s)

2392. 3/4" x 1/2" FTG x C Copper Reducer Fitting Adapter

Price: 0.96 USD
SKU: 1960
Weight: 0.16 lb(s)
Stock quantity: 435

2393. 3/4" x 1/2" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.44 USD
SKU: 2836
Weight: 0.32 lb(s)
Stock quantity: 0

2394. 3/4" x 1/2" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.60 USD
SKU: 2790
Weight: 0.12 lb(s)
Stock quantity: 3

2395. 3/4" x 1/2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.15 USD
SKU: 3011
Weight: 0.26 lb(s)
Stock quantity: 0

2396. 3/4" x 1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.94 USD
SKU: 2926
Weight: 0.48 lb(s)
Stock quantity: 0

2397. 3/4" x 1/2" PEX 90° Elbow

Price: 1.87 USD
SKU: 991
Weight: 0.07 lb(s)
Stock quantity: 20

2398. 3/4" x 1/2" PEX Coupling

Price: 0.75 USD
SKU: 5129
Weight: 0.07 lb(s)
Stock quantity: 34

2399. 3/4" x 1/2" PEX Tee

Price: 2.19 USD
SKU: 6024
Weight: 0.07 lb(s)
Stock quantity: 28

2400. 3/4" x 1/2" PVC DWV Reducer Coupling (HUB x HUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness.Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 0.97 USD
SKU: 4675
Weight: 0.16 lb(s)
Stock quantity: 8

2401. 3/4" x 1/2" PVC Pressure Female Adapter (SLIP x FIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.63 USD
SKU: 4591
Weight: 0.05 lb(s)
Stock quantity: 0

2402. 3/4" x 1/2" PVC Pressure Tee (SLIP x SLIP x SLIP)

Maximum service temperature 140°FASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 1.01 USD
SKU: 6040
Weight: 0.10 lb(s)
Stock quantity: 1

2403. 3/4" x 1/2" x 1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 1.98 USD
SKU: 72
Weight: 0.42 lb(s)
Stock quantity: 27

2404. 3/4" x 1/2" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.80 USD
SKU: 2044
Weight: 0.17 lb(s)

2405. 3/4" x 1/2" x 1/2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.21 USD
SKU: 2923
Weight: 0.42 lb(s)
Stock quantity: 2

2406. 3/4" x 1/2" x 1/2" PEX Tee

Price: 1.75 USD
SKU: 6030
Weight: 0.07 lb(s)
Stock quantity: 40

2407. 3/4" x 1/2" x 3/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 2.31 USD
SKU: 112
Weight: 0.49 lb(s)
Stock quantity: 50

2408. 3/4" x 1/2" x 3/4" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.80 USD
SKU: 1107
Weight: 0.60 lb(s)
Stock quantity: 0

2409. 3/4" x 1/2" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.80 USD
SKU: 2043
Weight: 0.17 lb(s)

2410. 3/4" x 1/2" x 3/4" C x F x C Tee

C x F x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 6.90 USD
SKU: 6212
Weight: 0.26 lb(s)
Stock quantity: 5

2411. 3/4" x 1/2" x 3/4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.21 USD
SKU: 2924
Weight: 0.49 lb(s)
Stock quantity: 2

2412. 3/4" x 1/2" x 3/4" PEX Tee

Price: 1.68 USD
SKU: 6035
Weight: 0.07 lb(s)
Stock quantity: 10

2413. 3/4" x 1/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.20 USD
SKU: 2555
Weight: 0.23 lb(s)
Stock quantity: 2

2414. 3/4" x 1/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.50 USD
SKU: 4331
Weight: 0.15 lb(s)
Stock quantity: 68

2415. 3/4" x 1/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.63 USD
SKU: 187
Weight: 0.22 lb(s)
Stock quantity: 3

2416. 3/4" x 1/4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 2.20 USD
SKU: 4056
Weight: 0.39 lb(s)
Stock quantity: 15

2417. 3/4" x 1/4" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.85 USD
SKU: 1189
Weight: 0.25 lb(s)
Stock quantity: 25

2418. 3/4" x 1/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.51 USD
SKU: 2788
Weight: 0.15 lb(s)
Stock quantity: 0

2419. 3/4" x 1/4" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.26 USD
SKU: 3009
Weight: 0.22 lb(s)
Stock quantity: 0

2420. 3/4" x 1/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.96 USD
SKU: 238
Weight: 0.16 lb(s)
Stock quantity: 7

2421. 3/4" x 1/8" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.21 USD
SKU: 3266
Weight: 0.19 lb(s)
Stock quantity: 2

2422. 3/4" x 1/8" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.66 USD
SKU: 1188
Weight: 0.26 lb(s)
Stock quantity: 26

2423. 3/4" x 1/8" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.69 USD
SKU: 2787
Weight: 0.16 lb(s)
Stock quantity: 0

2424. 3/4" x 1/8" x 3/4" C x F x C Tee

C x F x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 3.30 USD
SKU: 4177
Weight: 0.26 lb(s)
Stock quantity: 10

2425. 3/4" x 10' SCH 40 Black Pipe

Price: 19.17 USD
SKU: 1084
Stock quantity: 80

2426. 3/4" x 10' SCH 40 Galvanized Pipe

Price: 25.72 USD
SKU: 2489
Stock quantity: 16

2427. 3/4" x 10' SCH40 PVC DWV Pipe

Price: 4.21 USD
SKU: 4156
Stock quantity: 33

2428. 3/4" x 10' Type L Copper Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.45"

Price: 20.75 USD
SKU: 2189
Weight: 4.45 lb(s)
Stock quantity: 97

2429. 3/4" x 10" Copper M Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.032"

Price: 17.62 USD
SKU: 2193
Weight: 32.80 lb(s)
Stock quantity: 52

2430. 3/4" x 1000" Gas Guard PTFE Thread Seal Tape (Yellow)

#70827Composition: 99.0% PTFE Color: YellowThickness: 0.004" +/-10% (0.102mm +/-10%)Density: 1.5g/cm3 +/-10%Elongation: >100%Temperature range: -400°F to +500°F (-268°C to + 260°C) PTFE is completely stable up to +500°F or +260°C. Decomposition is slow up to 750°F or 400°C. Although decomposition will occur on contact with naked flamesTensile strength: 10-17 N/mm2Certified to comply with the provisions of MilSpec T-27730A, UL-listed, CSA approved

Price: 12.35 USD
SKU: 6399
Weight: 0.30 lb(s)
Stock quantity: 0

2431. 3/4" x 1000" Gray PTFE Grriptape

Reduced tensile strength and expanded elongation allows the tape to grip to threads easily with a tackier textureGray color blends in better to shower heads and fixtures offering a cleaner finished lookCan be used on various pipe material including stainless steel, PVC, ABS, aluminum and moreUL Listed Professional Grade TapeSeals stainless steel, cast iron, pvc, cpvc, and abs pipes, brass and chrome fittings, gas connections and more

Price: 3.83 USD

SKU: 8761

Weight: 0.30 lb(s)

Stock quantity: -16

2432. 3/4" x 1-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.76 USD
SKU: 1617
Weight: 0.11 lb(s)
Stock quantity: 51

2433. 3/4" x 1-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.68 USD
SKU: 4045
Weight: 0.16 lb(s)
Stock quantity: 7

2434. 3/4" x 1-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.72 USD
SKU: 1036
Weight: 0.16 lb(s)
Stock quantity: 330

2435. 3/4" x 1296" Teflon Tape (Gray)

Size: 3/4" x 1296"

Price: 2.69 USD
SKU: 8435
Weight: 0.01 lb(s)
Stock quantity: 36

2436. 3/4" x 1429" PTFE Thread Seal Tape (Blue)

Cat. #70886Composition: 99.6% PTFE Pigment Color: BlueLength: 1429"Thickness: 0.0035" +/- 10%Density: 0.8g/cm3Elongation: >100%Tensile Strength: 15N / mm2Pressure rating: Thread Sealing Tape has been used to seal fittings carrying water and oil at pressures up to 10,000 PSI or 69,000kPaNote: Pressure ratings are relative to the quality and torque of the fittings and the amount of tape used.Temperature Range: -450°F to +500°F (-268°C to +260°C) PTFE is completely stable up to +500o F or +260°C. Decomposition is slow up to 750°F or 400°C. Although decomposition will occur on contact with naked flames.

Price: 3.64 USD

SKU: 8841

Weight: 0.30 lb(s)

Stock quantity: 0

2437. 3/4" x 2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 3.39 USD
SKU: 1618
Weight: 0.16 lb(s)
Stock quantity: 31

2438. 3/4" x 2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.68 USD
SKU: 3221
Weight: 0.22 lb(s)
Stock quantity: 0

2439. 3/4" x 2" Hex Tap Bolt

Price: 1.51 USD
SKU: 1406
Weight: 0.35 lb(s)
Stock quantity: 0

2440. 3/4" x 2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.82 USD
SKU: 579
Weight: 0.22 lb(s)
Stock quantity: 102

2441. 3/4" x 2-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 3.20 USD
SKU: 1619
Weight: 0.21 lb(s)
Stock quantity: 26

2442. 3/4" x 2-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.76 USD
SKU: 2808
Weight: 0.28 lb(s)
Stock quantity: 9

2443. 3/4" x 2-1/2" Hex Tap Bolt

Price: 1.62 USD
SKU: 1468
Weight: 0.42 lb(s)
Stock quantity: 60

2444. 3/4" x 2-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.07 USD
SKU: 584
Weight: 0.28 lb(s)
Stock quantity: 164

2445. 3/4" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 3.31 USD
SKU: 1620
Weight: 0.27 lb(s)
Stock quantity: 59

2446. 3/4" x 3" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.76 USD
SKU: 2814
Weight: 0.34 lb(s)
Stock quantity: 9

2447. 3/4" x 3" Hex Tap Bolt

Price: 1.80 USD
SKU: 1697
Weight: 0.48 lb(s)
Stock quantity: 45

2448. 3/4" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.92 USD
SKU: 585
Weight: 0.34 lb(s)
Stock quantity: 141

2449. 3/4" x 3/4" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.10 USD
SKU: 2041
Weight: 0.24 lb(s)

2450. 3/4" x 3/4" x 1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.42 USD
SKU: 2042
Weight: 0.14 lb(s)

2451. 3/4" x 3/4" x 1/2" C x C x F Tee

C x C x F connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 5.94 USD
SKU: 1859
Weight: 0.24 lb(s)

2452. 3/4" x 3/8" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.64 USD
SKU: 2453
Weight: 0.27 lb(s)
Stock quantity: 4

2453. 3/4" x 3/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.23 USD
SKU: 239
Weight: 0.14 lb(s)
Stock quantity: 29

2454. 3/4" x 3/8" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.58 USD
SKU: 4134
Weight: 0.23 lb(s)
Stock quantity: 45

2455. 3/4" x 3/8" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 2.84 USD
SKU: 74
Weight: 0.42 lb(s)
Stock quantity: 1

2456. 3/4" x 3/8" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.63 USD
SKU: 1190
Weight: 0.24 lb(s)
Stock quantity: 19

2457. 3/4" x 3/8" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 4.13 USD
SKU: 1249
Weight: 0.35 lb(s)
Stock quantity: 5

2458. 3/4" x 3/8" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.85 USD
SKU: 2835
Weight: 0.27 lb(s)
Stock quantity: 0

2459. 3/4" x 3/8" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.69 USD
SKU: 2789
Weight: 0.14 lb(s)
Stock quantity: 0

2460. 3/4" x 3/8" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.26 USD
SKU: 3010
Weight: 0.23 lb(s)
Stock quantity: 0

2461. 3/4" x 3/8" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.02 USD
SKU: 2925
Weight: 0.42 lb(s)
Stock quantity: 0

2462. 3/4" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 3.55 USD
SKU: 1621
Weight: 0.32 lb(s)
Stock quantity: 48

2463. 3/4" x 3-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.96 USD
SKU: 2820
Weight: 0.40 lb(s)
Stock quantity: 8

2464. 3/4" x 3-1/2" Hex Tap Bolt

Price: 1.87 USD
SKU: 1720
Weight: 0.54 lb(s)
Stock quantity: 231

2465. 3/4" x 3-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.99 USD
SKU: 547
Weight: 0.40 lb(s)
Stock quantity: 197

2466. 3/4" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 5.61 USD
SKU: 1622
Weight: 0.37 lb(s)
Stock quantity: 35

2467. 3/4" x 4" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.96 USD
SKU: 2829
Weight: 0.46 lb(s)
Stock quantity: 7

2468. 3/4" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.03 USD
SKU: 527
Weight: 0.46 lb(s)
Stock quantity: 251

2469. 3/4" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 4.72 USD
SKU: 1623
Weight: 0.43 lb(s)
Stock quantity: 33

2470. 3/4" x 4-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.15 USD
SKU: 2882
Weight: 0.53 lb(s)
Stock quantity: 4

2471. 3/4" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.17 USD
SKU: 540
Weight: 0.53 lb(s)
Stock quantity: 107

2472. 3/4" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 5.39 USD
SKU: 1624
Weight: 0.48 lb(s)
Stock quantity: 38

2473. 3/4" x 5" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.15 USD
SKU: 3228
Weight: 0.59 lb(s)
Stock quantity: 3

2474. 3/4" x 5" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.19 USD
SKU: 541
Weight: 0.59 lb(s)
Stock quantity: 93

2475. 3/4" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 5.66 USD
SKU: 1625
Weight: 0.53 lb(s)
Stock quantity: 36

2476. 3/4" x 5-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.37 USD
SKU: 2742
Weight: 0.65 lb(s)
Stock quantity: 9

2477. 3/4" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.35 USD
SKU: 497
Weight: 0.65 lb(s)
Stock quantity: 114

2478. 3/4" x 520" Teflon Tape

Use on plastic, brass, copper, aluminum, galvanized-steel and black-iron piping Provides a strong tight seal for threaded joints

Price: 1.42 USD
SKU: 2382
Weight: 0.03 lb(s)
Stock quantity: 962

2479. 3/4" x 6' Galvanized Threaded Rod

Use a metal saw for cutting to suit your project needsFeatures long-lasting durable zinc-plated steel construction

Price: 11.20 USD
SKU: 1908
Weight: 3.00 lb(s)
Stock quantity: 50

2480. 3/4" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 8.16 USD
SKU: 1626
Weight: 0.58 lb(s)
Stock quantity: 37

2481. 3/4" x 6" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 1.37 USD
SKU: 2758
Weight: 0.71 lb(s)
Stock quantity: 9

2482. 3/4" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.40 USD
SKU: 498
Weight: 0.71 lb(s)
Stock quantity: 85

2483. 3/4" x 8" SDS-Plus Carbide Drill Bit

Price: 18.63 USD
SKU: 6325
Weight: 0.40 lb(s)
Stock quantity: 6

2484. 3/4" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.72 USD
SKU: 1616
Weight: 0.10 lb(s)
Stock quantity: 33

2485. 3/4" x Close Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 0.62 USD
SKU: 2777
Weight: 0.14 lb(s)
Stock quantity: 6

2486. 3/4" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.68 USD
SKU: 572
Weight: 0.14 lb(s)
Stock quantity: 50

2487. 3/8" Black 45° Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.43 USD
SKU: 31
Weight: 0.16 lb(s)
Stock quantity: 10

2488. 3/8" Black 45° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.33 USD
SKU: 23
Weight: 0.12 lb(s)
Stock quantity: 10

2489. 3/8" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.01 USD
SKU: 2547
Weight: 0.16 lb(s)
Stock quantity: 7

2490. 3/8" Black 90° Street Elbow

Connection: Threaded (female x male)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.80 USD
SKU: 94
Weight: 0.15 lb(s)
Stock quantity: 9

2491. 3/8" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 1.17 USD
SKU: 402
Weight: 0.08 lb(s)
Stock quantity: 22

2492. 3/8" Black C-Clamp

Material: Carbon steel with hardened steel cup point set screw (Type 304 or 316 Stainless Steel upon request)Finish: Plain or electro-galvanizedApprovals: Underwriters' Laboratories Listed in the U.S. (UL) for 3/8" and 1/2" sizes only. Complies with Federal Specifications A-A-1192A (Type 23)

Price: 0.76 USD
SKU: 1371
Weight: 0.36 lb(s)
Stock quantity: 0

2493. 3/8" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.28 USD
SKU: 344
Weight: 0.13 lb(s)
Stock quantity: 9

2494. 3/8" Black Junior Beam Clamp

Max. Pipe Size: 4"Max. Rec. Load: 400 lbs.Approvals: Complies with Federal Specifications A-A1192A (Type 19) and Manufacturers' Standardization Society ANSI/ MSS SPSP-58 (Type 19) which supersedes ANSI/MSS SP-69

Price: 1.32 USD
SKU: 8667
Weight: 0.33 lb(s)
Stock quantity: 0

2495. 3/8" Black Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 0.77 USD
SKU: 393
Weight: 0.05 lb(s)
Stock quantity: 12

2496. 3/8" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 1.80 USD
SKU: 304
Weight: 0.23 lb(s)
Stock quantity: 4

2497. 3/8" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 4.09 USD
SKU: 152
Weight: 0.33 lb(s)
Stock quantity: 5

2498. 3/8" Black Wide Mouth Beam Clamp

Malleable iron with hardened steel cup point set screw and locknutMax. Pipe Size: 4"Max. Rec. Load: 400 lbs.Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), and Factory Mutual Approved. Complies with Federal Specifications A-A-1192A (Type 19) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 19) which supersedes ANSI/MSS SP-69.

Price: 1.47 USD
SKU: 3796
Weight: 0.37 lb(s)
Stock quantity: 539

2499. 3/8" Brass 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.15 USD
SKU: 1164
Weight: 0.30 lb(s)
Stock quantity: 5

2500. 3/8" Brass 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°FMeets ASTM B62 standardMeets all applicable ANSI standards

Price: 1.96 USD
SKU: 1149
Weight: 0.30 lb(s)
Stock quantity: 3

2501. 3/8" Brass Cap

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.36 USD
SKU: 1111
Weight: 0.19 lb(s)
Stock quantity: 16

2502. 3/8" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.43 USD
SKU: 1125
Weight: 0.25 lb(s)
Stock quantity: 19

2503. 3/8" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 1.90 USD
SKU: 1449
Weight: 0.15 lb(s)
Stock quantity: 16

2504. 3/8" Brass Street 90° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.98 USD
SKU: 1424
Weight: 0.25 lb(s)
Stock quantity: 4

2505. 3/8" Brass Street 45° Elbow

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Bronze material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 3.31 USD
SKU: 6133
Weight: 0.22 lb(s)
Stock quantity: 5

2506. 3/8" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.92 USD
SKU: 1461
Weight: 0.35 lb(s)
Stock quantity: 7

2507. 3/8" Brass Union

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 6.98 USD
SKU: 1475
Weight: 0.34 lb(s)
Stock quantity: 5

2508. 3/8" Comp. Retrofit x 1/4" Comp. 1/4 Turn Straight Stop Valves

Lead Free (Chrome) For use in potable water distribution systemsTemperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 10.00 USD
SKU: 6293
Weight: 0.16 lb(s)
Stock quantity: 13

2509. 3/8" Comp. x 72" Stainless Steel Braided Dishwasher Connector w/ 90° Elbow

Connection: 3/8" comp. x 3/8" comp.Includes 3/8" comp. x 3/8" IPS 90° Elbow Pressure rating: 125 PSI maximumTemperature rating: 40°F to 140°FCertified to ANSI/NST 61, CSA B125.6-09 Lead Free

Price: 16.63 USD
SKU: 6476
Weight: 0.80 lb(s)
Stock quantity: 10

2510. 3/8" Compression Brass Sleeve

Price: 0.50 USD
SKU: 3857
Weight: 0.10 lb(s)
Stock quantity: 83

2511. 3/8" Compression Cap

Price: 1.44 USD
SKU: 1214
Weight: 0.10 lb(s)
Stock quantity: 284

2512. 3/8" Compression Elbow

Price: 3.32 USD
SKU: 2550
Weight: 0.10 lb(s)
Stock quantity: 18

2513. 3/8" Compression Insert

Price: 0.50 USD
SKU: 3707
Weight: 0.01 lb(s)
Stock quantity: 101

2514. 3/8" Compression Nut

Price: 0.92 USD
SKU: 1212
Weight: 0.10 lb(s)
Stock quantity: 63

2515. 3/8" Compression Plastic Sleeve

Price: 0.50 USD
SKU: 4840
Weight: 0.01 lb(s)
Stock quantity: 100

2516. 3/8" Compression Tee

Price: 4.61 USD
SKU: 4395
Weight: 0.10 lb(s)
Stock quantity: 6

2517. 3/8" Compression Union

Price: 2.46 USD
SKU: 1219
Weight: 0.10 lb(s)
Stock quantity: 21

2518. 3/8" Compression x 1/2" Female IPS Elbow

Price: 4.49 USD
SKU: 2952
Weight: 0.10 lb(s)
Stock quantity: 6

2519. 3/8" Compression x 1/2" Male IPS Adapter

Price: 2.62 USD
SKU: 2940
Weight: 0.10 lb(s)
Stock quantity: 75

2520. 3/8" Compression x 1/2" Male IPS Adapter

Chrome Plated

Price: 2.42 USD
SKU: 1825
Weight: 0.10 lb(s)
Stock quantity: 6

2521. 3/8" Compression x 1/2" Male IPS Adapter

Price: 2.46 USD
SKU: 1225
Weight: 0.10 lb(s)
Stock quantity: 35

2522. 3/8" Compression x 1/2" Male IPS Elbow

Price: 4.61 USD
SKU: 2558
Weight: 0.10 lb(s)
Stock quantity: 12

2523. 3/8" Compression x 1/2" Sweat Adapter

Price: 2.56 USD
SKU: 2992
Weight: 0.10 lb(s)
Stock quantity: 14

2524. 3/8" Compression x 1/4" Male IPS Adapter

Price: 2.01 USD
SKU: 4878
Weight: 0.10 lb(s)
Stock quantity: 14

2525. 3/8" Compression x 1/4" Male IPS Adapter

Price: 2.03 USD
SKU: 5043
Weight: 0.10 lb(s)
Stock quantity: 0

2526. 3/8" Compression x 1/4" Male IPS Elbow

Price: 2.62 USD
SKU: 4291
Weight: 0.10 lb(s)
Stock quantity: 5

2527. 3/8" Compression x 3/4" Male IPS Adapter

Price: 3.79 USD
SKU: 5180
Weight: 0.10 lb(s)
Stock quantity: 10

2528. 3/8" Compression x 3/8" Female IPS Elbow

Price: 3.18 USD
SKU: 1071
Weight: 0.10 lb(s)
Stock quantity: 15

2529. 3/8" Compression x 3/8" Female IPS Elbow

Price: 5.74 USD
SKU: 4904
Weight: 0.10 lb(s)
Stock quantity: 26

2530. 3/8" Compression x 3/8" Male IPS Adapter

Price: 2.05 USD
SKU: 4412
Weight: 0.10 lb(s)
Stock quantity: 3

2531. 3/8" Compression x 3/8" Male IPS Adapter

Price: 2.13 USD
SKU: 2702
Weight: 0.10 lb(s)
Stock quantity: 20

2532. 3/8" Compression x 3/8" Male IPS Adapter

Chrome Plated

Price: 1.48 USD
SKU: 8708
Weight: 0.10 lb(s)
Stock quantity: 10

2533. 3/8" Compression x 3/8" Male IPS Adapter

Chrome Plated

Price: 2.15 USD
SKU: 4951
Weight: 0.10 lb(s)
Stock quantity: 15

2534. 3/8" Compression x 3/8" Male IPS Elbow

Price: 3.63 USD
SKU: 1220
Weight: 0.10 lb(s)
Stock quantity: 61

2535. 3/8" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.91 USD
SKU: 2003
Weight: 0.03 lb(s)

2536. 3/8" Copper Ceiling Flange

Price: 0.41 USD
SKU: 3307
Stock quantity: 0

2537. 3/8" Copper Coupling (Socket) w/Tube Stop

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 0.33 USD
SKU: 1910
Weight: 0.03 lb(s)
Stock quantity: 55

2538. 3/8" Copper Epoxy Coated Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 0.50 USD
SKU: 1583
Weight: 0.08 lb(s)
Stock quantity: 0

2539. 3/8" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.57 USD
SKU: 8534
Weight: 0.06 lb(s)

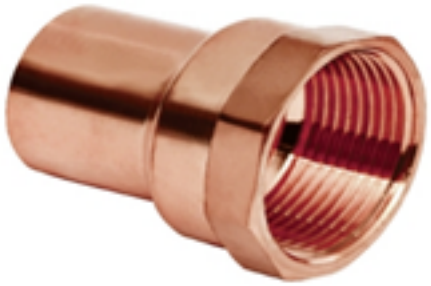

2540. 3/8" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 1.73 USD
SKU: 2157
Weight: 0.05 lb(s)

2541. 3/8" Double Expansion Shield Anchor

Price: 1.21 USD
SKU: 1676
Weight: 0.30 lb(s)
Stock quantity: 846

2542. 3/8" FIP x 12" Stainless Steel Braided Connector

Temperature rating: 40° to 140°F, intermittent to 180°F Pressure rating: 125 psi maximum IAPMO and CSA listed to ASME A112.18.6/CSA B125.6 Quick and easy installation- No special tools; no soldering

Price: 3.89 USD
SKU: 3520
Weight: 0.30 lb(s)
Stock quantity: 110

2543. 3/8" FIP x 20" Stainless Steel Braided Connector

Temperature rating: 40° to 140°F, intermittent to 180°F Pressure rating: 125 psi maximum IAPMO and CSA listed to ASME A112.18.6/CSA B125.6 Quick and easy installation- No special tools; no soldering

Price: 4.42 USD
SKU: 3846
Weight: 0.35 lb(s)
Stock quantity: 68

2544. 3/8" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.39 USD
SKU: 2864
Weight: 0.16 lb(s)
Stock quantity: 0

2545. 3/8" Galvanized 45° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 2.00 USD
SKU: 2901
Weight: 0.13 lb(s)
Stock quantity: 0

2546. 3/8" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.04 USD
SKU: 41
Weight: 0.16 lb(s)
Stock quantity: 0

2547. 3/8" Galvanized 90° Street Elbow

Connection: Threaded (male x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.42 USD
SKU: 2887
Weight: 0.16 lb(s)
Stock quantity: 0

2548. 3/8" Galvanized Cap

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 0.94 USD
SKU: 30
Weight: 0.08 lb(s)
Stock quantity: 0

2549. 3/8" Galvanized Ceiling Flange

Price: 0.64 USD
SKU: 1339
Weight: 0.18 lb(s)
Stock quantity: 885

2550. 3/8" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.21 USD
SKU: 3000
Weight: 0.13 lb(s)
Stock quantity: 0

2551. 3/8" Galvanized Drop-In Anchor

Price: 0.41 USD
SKU: 2205
Weight: 0.30 lb(s)
Stock quantity: 430

2552. 3/8" Galvanized Junior Beam Clamp

Max. Pipe Size: 4"Max. Rec. Load: 400 lbs.Approvals: Complies with Federal Specifications A-A1192A (Type 19) and Manufacturers' Standardization Society ANSI/ MSS SPSP-58 (Type 19) which supersedes ANSI/MSS SP-69, Canada (CUL).

Price: 1.06 USD
SKU: 1409
Weight: 0.33 lb(s)
Stock quantity: 871

2553. 3/8" Galvanized Rod Coupling

Material: Carbon steelFinish: Electro-GalvanizedMax. Rec. Load: 730 lbs.

Price: 0.46 USD
SKU: 1373
Weight: 0.11 lb(s)
Stock quantity: 327

2554. 3/8" Galvanized Round Washer (Box of 100)

Material: Carbon steelFinish: Electro-galvanized

Price: 0.12 USD
SKU: 1070
Weight: 1.08 lb(s)
Stock quantity: 7242

2555. 3/8" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.37 USD
SKU: 2910
Weight: 0.23 lb(s)
Stock quantity: 0

2556. 3/8" Galvanized Union

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 3.13 USD
SKU: 254
Weight: 0.33 lb(s)
Stock quantity: 0

2557. 3/8" Galvanized Wide Mouth Beam Clamp

Malleable iron with hardened steel cup point set screw and locknutMax. Pipe Size: 4"Max. Rec. Load: 400 lbs.Approvals: Underwriters' Laboratories Listed in the U.S. (UL), and Factory Mutual Approved. Canada (CUL). Complies with Federal Specifications A-A-1192A (Type 19) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 19) which supersedes ANSI/MSS SP-69

Price: 0.88 USD

SKU: 8668

Weight: 0.37 lb(s)

Stock quantity: 0

2558. 3/8" General Purpose Steel Drill Bit

Constructed of M-2 high speed steel for the best combination of strength, heat resistance, and wear resistanceStandard 118 degree point for use in wood, metal, and plasticOverrall Length: 2-1/2"

Price: 11.32 USD
SKU: 6111
Weight: 0.05 lb(s)
Stock quantity: 1

2559. 3/8" Heavy Hex Nut Zinc (Box of 100)

Material: SteelFinish: Zinc

Price: 0.13 USD
SKU: 4858
Weight: 3.00 lb(s)
Stock quantity: 3823

2560. 3/8" HSS Black & Gold Drill Bit

KFD Killer Force Drill Bits are manufactured from M2 premium grade high speed steelFor use in a wide range of materials in the iron and steel families such aluminum, iron, stainless steel and other hard metal drilling135 degree split point tip for self-centering and reducing thrust. Compared to a conventional 118 degree tip, these drills wont go "walking" on youBlack and gold surface treated for use in stainless steel and other hard metal drilling

Price: 3.71 USD
SKU: 2295
Weight: 0.05 lb(s)
Stock quantity: 12

2561. 3/8" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 4.47 USD
SKU: 4763
Weight: 0.30 lb(s)
Stock quantity: 13

2562. 3/8" IPS Chrome Plated Bell Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.68 USD
SKU: 4906
Weight: 0.03 lb(s)
Stock quantity: 70

2563. 3/8" IPS Chrome Plated Shallow Escutcheon

Chrome Plated FinishMade of Steel

Price: 0.29 USD
SKU: 1022
Weight: 0.03 lb(s)
Stock quantity: 48

2564. 3/8" IPS Chrome Plated Split Escutcheon

Chrome Plated FinishMade of Steel

Price: 1.07 USD
SKU: 2675
Weight: 0.03 lb(s)
Stock quantity: 108

2565. 3/8" IPS Swing Check Valve

Lead FreeCast brass swing check valve125 WSP, 200 WOGApproved By UPC, NSF

Price: 3.20 USD
SKU: 2469

2566. 3/8" IPS x 3/8" Comp. 1/4 Turn Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 4.28 USD
SKU: 4963
Weight: 0.20 lb(s)
Stock quantity: 18

2567. 3/8" IPS x 3/8" Comp. Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 3.41 USD
SKU: 2855
Weight: 0.20 lb(s)
Stock quantity: 14

2568. 3/8" IPS x 3/8" Comp. Straight Stop Valve

Lead Free (Chrome) For use in potable water distribution systemsTemperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 3.30 USD
SKU: 3216
Weight: 0.25 lb(s)
Stock quantity: 20

2569. 3/8" Side Beam Connector Black

Material: Malleable iron.

Price: 0.70 USD
SKU: 2616
Weight: 0.80 lb(s)
Stock quantity: 126

2570. 3/8" Standard Length Spade Bit

Blue-Groove point and cutting edge for faster chip removal - 4x faster than standard spade bitsDouble cutting spurs scribe the outside of the hole reducing breakout10% larger shank for added durabilityGrooved hex shank prevents slipping in drill chuck or bit extensionFits all standard quick change chucks

Price: 5.27 USD
SKU: 4341
Weight: 0.30 lb(s)
Stock quantity: 12

2571. 3/8" Torch Handle for Acetylene

Price: 48.41 USD
SKU: 4874
Weight: 1.50 lb(s)
Stock quantity: 1

2572. 3/8" x 1/4" Galvanized Rod Coupling

Material: Carbon steelFinish: Electro-GalvanizedMax. Rec. Load: 730 lbs.

Price: 1.17 USD
SKU: 2313
Weight: 0.11 lb(s)
Stock quantity: 200

2573. 3/8" x 1" Hex Tap Bolt

Price: 0.21 USD
SKU: 2235
Weight: 0.30 lb(s)
Stock quantity: 142

2574. 3/8" x 1" Metal Horizontal VERTIGO (Box of 25)

One step installation processNo predrilling requiredReduces installation time and costAttaches to the side of wood elementsProvides more attachment locations for designers and specifiersInstalls with SAMMYS Nut DriverEnsures correct installation torqueReduces occurrences of fastener failure due to over driving

Price: 0.99 USD
SKU: 8424
Weight: 1.45 lb(s)
Stock quantity: 50

2575. 3/8" x 1" Metal Vertical VERTIGO (Box of 25)

Teks Drill Point technology delivers one step installation processNo predrilling requiredReduces installation time and costThreaded rod attachmentAllows specifiers and designers to engineer systems with fewer attachment pointsInstalls with SAMMYS Nut DriverEnsures correct installation torqueReduces occurrences of fastener failure due to over driving

Price: 1.35 USD

SKU: 4832

Weight: 1.45 lb(s)

Stock quantity: 0

2576. 3/8" x 1" Wood Horizontal VERTIGO (Box of 25)

One step installation processNo predrilling requiredReduces installation time and costThreaded rod attachmentAllows specifiers and designers to engineer systems with fewer attachment pointsInstalls with SAMMYS Nut DriverEnsures correct installation torqueReduces occurrences of fastener failure due to over driving

Price: 1.49 USD
SKU: 8423
Weight: 1.45 lb(s)
Stock quantity: 74

2577. 3/8" x 1" Wood Vertical VERTIGO (Box of 25)

One step installation processNo predrilling requiredReduces installation time and costThreaded rod attachmentAllows specifiers and designers to engineer systems with fewer attachment pointsInstalls with SAMMYS Nut DriverEnsures correct installation torqueReduces occurrences of fastener failure due to over driving

Price: 1.39 USD
SKU: 4599
Weight: 1.45 lb(s)
Stock quantity: 122

2578. 3/8" x 1/2" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 2.59 USD
SKU: 2167
Weight: 0.09 lb(s)

2579. 3/8" x 1/4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.74 USD
SKU: 289
Weight: 0.13 lb(s)
Stock quantity: 2

2580. 3/8" x 1/4" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.58 USD
SKU: 359
Weight: 0.04 lb(s)
Stock quantity: 10

2581. 3/8" x 1/4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.43 USD
SKU: 195
Weight: 0.11 lb(s)
Stock quantity: 5

2582. 3/8" x 1/4" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.46 USD
SKU: 1184
Weight: 0.25 lb(s)
Stock quantity: 10

2583. 3/8" x 1/4" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.22 USD
SKU: 6139
Weight: 0.22 lb(s)
Stock quantity: 0

2584. 3/8" x 1/4" Compression Elbow

Price: 4.10 USD
SKU: 2565
Weight: 0.10 lb(s)
Stock quantity: 9

2585. 3/8" x 1/4" Compression Tee

Price: 6.15 USD
SKU: 4320
Weight: 0.10 lb(s)
Stock quantity: 10

2586. 3/8" x 1/4" Compression Union

Price: 2.34 USD
SKU: 5036
Weight: 0.10 lb(s)
Stock quantity: 26

2587. 3/8" x 1/4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.57 USD
SKU: 2830
Weight: 0.13 lb(s)
Stock quantity: 0

2588. 3/8" x 1/4" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.46 USD
SKU: 2803
Weight: 0.04 lb(s)
Stock quantity: 0

2589. 3/8" x 1/4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.15 USD
SKU: 3002
Weight: 0.11 lb(s)
Stock quantity: 0

2590. 3/8" x 1/8" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 1.58 USD
SKU: 247
Weight: 0.05 lb(s)
Stock quantity: 8

2591. 3/8" x 1/8" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 1.41 USD
SKU: 2821
Weight: 0.10 lb(s)
Stock quantity: 5

2592. 3/8" x 1/8" Brass Bushing

Max. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 1.97 USD
SKU: 3217
Weight: 0.15 lb(s)
Stock quantity: 8

2593. 3/8" x 1/8" Brass Coupling

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 2.22 USD
SKU: 1242
Weight: 0.22 lb(s)
Stock quantity: 5

2594. 3/8" x 1/8" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 1.46 USD
SKU: 2802
Weight: 0.05 lb(s)
Stock quantity: 0

2595. 3/8" x 1-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.75 USD
SKU: 1571
Weight: 0.06 lb(s)
Stock quantity: 27

2596. 3/8" x 11/2" Galvanized Fender Washer (Box of 100)

Material: Carbon steelFinish: Electro-galvanized

Price: 0.26 USD
SKU: 1486
Weight: 2.34 lb(s)
Stock quantity: 1210

2597. 3/8" x 1-1/2" Metal Vertical VERTIGO (Box of 25)

Teks Drill Point technology delivers one step installation processNo predrilling requiredReduces installation time and costThreaded rod attachmentAllows specifiers and designers to engineer systems with fewer attachment pointsInstalls with SAMMYS Nut DriverEnsures correct installation torqueReduces occurrences of fastener failure due to over driving

Price: 1.20 USD
SKU: 2724
Weight: 1.45 lb(s)
Stock quantity: 0

2598. 3/8" x 1-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.57 USD
SKU: 580
Weight: 0.08 lb(s)
Stock quantity: 19

2599. 3/8" x 1-1/2" Wood Vertical VERTIGO (Box of 25)

One step installation processNo predrilling requiredReduces installation time and costThreaded rod attachmentAllows specifiers and designers to engineer systems with fewer attachment pointsInstalls with SAMMYS Nut DriverEnsures correct installation torqueReduces occurrences of fastener failure due to over driving

Price: 1.19 USD
SKU: 1065
Weight: 1.45 lb(s)
Stock quantity: 0

2600. 3/8" x 12" Copper Chrome Plated Lavatory Supply

Temperature rating: 40° to 180°FPressure rating: 125 psi maximum IAPMO and CSA listed to ASME A112.18.1/CSA B125.1

Price: 3.30 USD
SKU: 4859
Weight: 0.10 lb(s)
Stock quantity: 24

2601. 3/8" x 12" Stainless Steel Braided Delta Lavatory Supply

Reliable, trouble-free service- Inner core of non-toxic polymer withstands temperatures of 33°F to 174°F3/8" MIP x 3/8" FIPQuick and easy installation- No special tools; no soldering No pipe bending- Flexible connectors simplify installation- even in cramped spaces Chrome plated nutNSF approved

Price: 2.47 USD
SKU: 2767
Weight: 0.35 lb(s)
Stock quantity: 203

2602. 3/8" x 2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.46 USD
SKU: 1572
Weight: 0.09 lb(s)
Stock quantity: 10

2603. 3/8" x 2" Concrete Vertical VERTIGO (Box of 25)

Drill hole & drive Sammys concrete anchor using one kit (concrete installation kit)Reduces installation time and costThreaded rod attachmentAllows specifiers and designers to engineer systems with fewer attachment pointsInstalls with SAMMYS Nut DriverEnsures correct installation torqueReduces occurrences of fastener failure due to over driving

Price: 1.58 USD
SKU: 4838
Weight: 1.45 lb(s)
Stock quantity: 343

2604. 3/8" x 2" Metal Vertical VERTIGO (Box of 25)

Teks Drill Point technology delivers one step installation processNo predrilling requiredReduces installation time and costThreaded rod attachmentAllows specifiers and designers to engineer systems with fewer attachment pointsInstalls with SAMMYS Nut DriverEnsures correct installation torqueReduces occurrences of fastener failure due to over driving

Price: 1.48 USD

SKU: 6635

Weight: 1.45 lb(s)

Stock quantity: 28

2605. 3/8" x 2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.59 USD
SKU: 581
Weight: 0.10 lb(s)
Stock quantity: 22

2606. 3/8" x 2" Wood Horizontal VERTIGO (Box of 25)

One step installation processNo predrilling requiredReduces installation time and costThreaded rod attachmentAllows specifiers and designers to engineer systems with fewer attachment pointsInstalls with SAMMYS Nut DriverEnsures correct installation torqueReduces occurrences of fastener failure due to over driving

Price: 1.56 USD
SKU: 2716
Weight: 1.45 lb(s)
Stock quantity: 75

2607. 3/8" x 2" Wood Vertical VERTIGO (Box of 25)

One step installation processNo predrilling requiredReduces installation time and costThreaded rod attachmentAllows specifiers and designers to engineer systems with fewer attachment pointsInstalls with SAMMYS Nut DriverEnsures correct installation torqueReduces occurrences of fastener failure due to over driving

Price: 1.19 USD
SKU: 6633
Weight: 1.45 lb(s)
Stock quantity: 588

2608. 3/8" x 20" Copper Chrome Plated Delta Lavatory Supply

Temperature rating: 40° to 180° F3/8" O.D. x 3/8" Comp.Pressure rating: 125 psi maximum APMO and CSA listed to ASME A112.18.1/CSA B125.1

Price: 5.80 USD
SKU: 4867
Weight: 0.14 lb(s)
Stock quantity: 19

2609. 3/8" x 20" Copper Chrome Plated Lavatory Supply

Temperature rating: 40° to 180°FPressure rating: 125 psi maximum IAPMO and CSA listed to ASME A112.18.1/CSA B125.1

Price: 4.60 USD
SKU: 3609
Weight: 0.14 lb(s)
Stock quantity: 12

2610. 3/8" x 20" Copper Chrome Plated Toilet Supply

Temperature rating: 40° to 180°FPressure rating: 125 psi maximumIAPMO and CSA listed to ASME A112.18.1/CSA B125.1

Price: 4.20 USD
SKU: 2458
Weight: 0.14 lb(s)
Stock quantity: -2

2611. 3/8" x 20" Stainless Steel Braided Delta Lavatory Supply

Reliable, trouble-free service- Inner core of non-toxic polymer withstands temperatures of 33°F to 174°F3/8" MIP x 3/8" FIPQuick and easy installation- No special tools; no soldering No pipe bending- Flexible connectors simplify installation- even in cramped spaces Chrome plated nutNSF approved

Price: 2.95 USD
SKU: 4957
Weight: 0.45 lb(s)
Stock quantity: 156

2612. 3/8" x 2-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.58 USD
SKU: 1573
Weight: 0.12 lb(s)
Stock quantity: 24

2613. 3/8" x 2-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.70 USD
SKU: 528
Weight: 0.15 lb(s)
Stock quantity: 23

2614. 3/8" x 3" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.95 USD
SKU: 1574
Weight: 0.14 lb(s)
Stock quantity: 9

2615. 3/8" x 3" Hex Tap Bolt

Price: 0.64 USD
SKU: 339
Weight: 0.48 lb(s)
Stock quantity: 60

2616. 3/8" x 3" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.84 USD
SKU: 529
Weight: 0.18 lb(s)
Stock quantity: 23

2617. 3/8" x 3/8" x 1/4" Compression Swivel Tee

Price: 4.44 USD
SKU: 4333
Weight: 0.10 lb(s)
Stock quantity: 18

2618. 3/8" x 3/8" x 3/8" Compression Swivel Tee

Price: 4.44 USD
SKU: 4340
Weight: 0.10 lb(s)
Stock quantity: 2

2619. 3/8" x 3-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.11 USD
SKU: 1575
Weight: 0.17 lb(s)
Stock quantity: 22

2620. 3/8" x 3-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.94 USD
SKU: 537
Weight: 0.21 lb(s)
Stock quantity: 24

2621. 3/8" x 36" Copper Chrome Plated Toilet Supply

Temperature rating: 40° to 180°FPressure rating: 125 psi maximumIAPMO and CSA listed to ASME A112.18.1/CSA B125.1

Price: 7.67 USD
SKU: 4991
Weight: 0.20 lb(s)
Stock quantity: 0

2622. 3/8" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.50 USD
SKU: 1576
Weight: 0.19 lb(s)
Stock quantity: 20

2623. 3/8" x 4" Carriage Bolt

Price: 0.97 USD
SKU: 1888
Weight: 0.55 lb(s)
Stock quantity: 86

2624. 3/8" x 4" Hanger Bolt

Price: 0.76 USD
SKU: 4852
Weight: 0.56 lb(s)
Stock quantity: 61

2625. 3/8" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.96 USD
SKU: 538
Weight: 0.24 lb(s)
Stock quantity: 25

2626. 3/8" x 4-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.67 USD
SKU: 1577
Weight: 0.22 lb(s)
Stock quantity: 21

2627. 3/8" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.35 USD
SKU: 485
Weight: 0.27 lb(s)
Stock quantity: 25

2628. 3/8" x 5" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 2.94 USD
SKU: 1578
Weight: 0.25 lb(s)
Stock quantity: 20

2629. 3/8" x 5" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.35 USD
SKU: 486
Weight: 0.31 lb(s)
Stock quantity: 25

2630. 3/8" x 50 ft Copper Tubing Type L Coil

Price: 41.25 USD
SKU: 2401
Weight: 6.34 lb(s)
Stock quantity: 9

2631. 3/8" x 5-1/2" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 3.17 USD
SKU: 1579
Weight: 0.27 lb(s)
Stock quantity: 21

2632. 3/8" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.50 USD
SKU: 479
Weight: 0.33 lb(s)
Stock quantity: 25

2633. 3/8" x 6' Galvanized Threaded Rod

Use a metal saw for cutting to suit your project needsFeatures long-lasting durable zinc-plated steel construction

Price: 2.41 USD
SKU: 1521
Weight: 2.00 lb(s)
Stock quantity: 596

2634. 3/8" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 3.44 USD
SKU: 1580
Weight: 0.30 lb(s)
Stock quantity: 19

2635. 3/8" x 6" Carriage Bolt

Price: 1.23 USD
SKU: 1896
Weight: 0.60 lb(s)
Stock quantity: 50

2636. 3/8" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 1.50 USD
SKU: 474
Weight: 0.37 lb(s)
Stock quantity: 25

2637. 3/8" x 6"Hanger Bolt

Price: 1.10 USD
SKU: 2709
Weight: 0.65 lb(s)
Stock quantity: 77

2638. 3/8" x 8" Hanger Bolt

Price: 1.22 USD
SKU: 2701
Weight: 0.70 lb(s)
Stock quantity: 0

2639. 3/8" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 1.02 USD
SKU: 1570
Weight: 0.04 lb(s)
Stock quantity: 4

2640. 3/8" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 0.53 USD
SKU: 577
Weight: 0.05 lb(s)
Stock quantity: 23

2641. 3/8"Copm. Retrofit x 3/8" Comp. 1/4 Turn Straight Stop Valve

Lead Free (Chrome) For use in potable water distribution systemsTemperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 10.00 USD
SKU: 4961
Weight: 0.22 lb(s)
Stock quantity: 2

2642. 30 psi Pressure Gauge

Price: 10.48 USD
SKU: 3628
Weight: 0.50 lb(s)
Stock quantity: 3

2643. 30 psi Pressure Gauge

Price: 7.44 USD
SKU: 4429
Weight: 0.24 lb(s)
Stock quantity: 2

2644. 30 psi Pressure Gauge

Price: 5.20 USD
SKU: 3876
Weight: 0.24 lb(s)
Stock quantity: 7

2645. 300 psi Pressure Gauge

Price: 5.53 USD
SKU: 3898
Weight: 0.24 lb(s)
Stock quantity: 6

2646. 300 psi Pressure Gauge

Price: 10.48 USD
SKU: 2440
Weight: 0.52 lb(s)
Stock quantity: 1

2647. 3-1/2" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 14.89 USD
SKU: 3117
Weight: 0.62 lb(s)
Stock quantity: -1

2648. 3-1/4" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 14.89 USD
SKU: 3536
Weight: 0.60 lb(s)
Stock quantity: 0

2649. 32 oz. Arctic Armor Spray-on Thermal Shield Gel

Protects components and materials during soldering to avoid heat damageProtects valves during solderingReduces the threat of costly heat damage to valve seals and gasketsProtects painted and nished surfaces from discoloration due to torch heatUnique gelled formula sticks to surfaces without dripping or running offClear, non-staining gel leaves no residue, eliminating cleanupSafe, non-toxic, harmless to skin, and odorlessMade in U.S.A. For Use On:Valves and fittingsNew construction and piping installationShower valves installation and repairTrim work and cabinetryDrywall and studsCommercial rooftop repairFurnace repair and installationRefrigeration repair and installationMedical gas systemsValve installation and repairWelding

Price: 19.95 USD

SKU: 8837

Weight: 4.00 lb(s)

Stock quantity: 0

2650. 32 oz. BigGas Bubbles Leak Detector

Price: 5.82 USD
SKU: 1845
Weight: 2.30 lb(s)
Stock quantity: 6

2651. 32 oz. Boiler and Heating System Cleaner

Contains silicone tp protect pumps by lubricating sealsFrees and lubricates zone valvesHelps stop priming and foaming with a special anti-foam agentLiquid cleaner and corrosion preventative treatmentHelps maximize boiler efficiency

Price: 14.65 USD
SKU: 1807
Weight: 2.26 lb(s)
Stock quantity: 10

2652. 32 oz. Boiler Liquid

Prevents steam boiler surgingWill not clog or coat submerged hot water heating coils, controls, vents or valvesResists high pressure and is not affected by boiler cleanersWill not cause priming or foaming

Price: 16.80 USD
SKU: 4797
Weight: 2.64 lb(s)
Stock quantity: 8

2653. 32 oz. Clobber® Drain And Waste System Cleaner, Professional License is Required

BEFORE PRODUCT WILL BE SHIPPED YOU HAVE TO PROVIDE US WITH YOUR PROFESSIONAL LICENSE BY E-MAIL (orders@thecraftsupply.com)Fastest method for clearing emergency waste line stoppagesRapidly disintegrates paper, rags, food and all organic matterFormulated to inhibit corrosive action on ferrous and non-ferrous metalsWill not harm septic tanks, cesspools, drainage fields and leaching systems when used according to directionsCan be used to thaw frozen lines

Price: 14.80 USD

SKU: 5374

Weight: 4.00 lb(s)

Stock quantity: 1

2654. 32 oz. Dark Cutting Oil

Contains activated sulfur-lard and extreme pressure-antiwear additivesFree of chlorine, other halogens, PCBs and heavy metalsBetter heat dissipationLong lasting formula with less residue backup

Price: 11.49 USD
SKU: 1803
Weight: 2.20 lb(s)
Stock quantity: 27

2655. 32 oz. Glug Liquid Drain Opener (bath)

Attacks kitchen clogs caused by buildup of fats, grease and foodstuffsAttacks bath clogs caused by hair and soap products

Price: 11.34 USD
SKU: 6617
Weight: 2.40 lb(s)
Stock quantity: 0

2656. 32 oz. Megabubble Leak Detector

Price: 14.70 USD
SKU: 1984
Weight: 2.30 lb(s)
Stock quantity: 33

2657. 32 oz. PVC Cement

Meets ASTM D-2564 Listed by NSF International for use on potable water, sewer and drain, waste & vent systemsMost effective when used in temperature ranges from 40° F to 100° F

Price: 14.07 USD
SKU: 3842
Weight: 2.10 lb(s)
Stock quantity: 3

2658. 32 oz. PVC Primer (Clear)

Recommended method to soften and prepare surface of PVC pipe and fittings before applying solvent cements. Meets ASTM F656.

Price: 12.29 USD
SKU: 3730
Stock quantity: 4

2659. 3-3/4" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 20.33 USD
SKU: 3539
Weight: 0.64 lb(s)
Stock quantity: 0

2660. 36" Aluminum Straight Pipe Wrench

Price: 191.40 USD
SKU: 4347
Weight: 11.00 lb(s)
Stock quantity: 1

2661. 36" Stainless Steel Braided Connector 3/8" Comp. x 1/2" IPS

Temperature rating: 40° to 140°F, intermittent to 180°F Pressure rating: 125 psi maximum IAPMO and CSA listed to ASME A112.18.6/CSA B125.6 Quick and easy installation- No special tools; no soldering No pipe bending- Flexible connectors simplify installation- even in cramped spaces

Price: 3.21 USD

SKU: 653

Weight: 0.40 lb(s)

Stock quantity: 8

2662. 3-7/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 21.80 USD
SKU: 4181
Weight: 0.64 lb(s)
Stock quantity: 2

2663. 3-Speed Cast Iron Circulator Pump （Astro 2 Series, Model 210 CI)

Cast iron pump body constructionCeramic shaft and bearingsCross-reference information is printed on the box, for convenient accesse-Coating on the inside of cast-iron volutes provides enhanced corrosion protection for improved reliabilityFlange-to-flange and bolt-to-bolt compatibility offers quick and easy exchange of competing modelsPlug-in terminal strip saves timeHigh-flow check valve, is pre-installed for convenience. Where the installation does not call for a check valve, it can be removed in secondsMax. fluid temperature: 230°F Max. working pressure: 150 psi

Price: 203.00 USD
SKU: 6152
Weight: 8.00 lb(s)
Stock quantity: 0

2664. 4 -1/2" x7/8" Metal/Stainless Abrasive Cut-Off Wheel

Designed for use with small angle grinderType 1A straight wheel for cuttingUsed at a 90-degree angleFor cutting only, no grindingAluminum oxide special grain cuts high-tensile strength materials without excessive fracturingUse for metal/stainless cuttingRapido™ technology performs up to 50% fasterRequires less forceExcellent for vibration-free cutting/no burningNot to exceed 13,280 RPMArbor Size: 7/8"

Price: 2.24 USD
SKU: 8526
Weight: 0.01 lb(s)
Stock quantity: 40

2665. 4 lbs. Plaster of Paris Dry Mix

Price: 5.00 USD
SKU: 2991
Weight: 5.00 lb(s)
Stock quantity: 10

2666. 4 oz. Lube Oil With Extenda-Spout

Non-gumming, non-toxic, non-detergent, and will not foam during useContains rust and corrosion preventativesCustom-formulated, multi-purpose lubricating oilNOT FOR USE WITH LIGHT ELECTRIC MOTORS

Price: 5.70 USD
SKU: 6213
Weight: 0.30 lb(s)
Stock quantity: 20

2667. 4 oz. PVC Cement Medium Body, Medium Set (Clear)

For PVC Types, potable water, DWV, and SW pipe and fittings up to 6" diameterSchedules 40 and 80 Meets ASTM D2564

Price: 4.14 USD
SKU: 1798
Weight: 0.32 lb(s)
Stock quantity: 20

2668. 4 oz. PVC Primer (Purple)

Recommended method to soften and prepare surface of PVC pipe and fittings before applying solvent cementsPurple primers contain a dye which is difficult or impossible to remove from many surfacesMeets ASTM F656

Price: 5.04 USD
SKU: 379
Weight: 0.32 lb(s)
Stock quantity: 16

2669. 4 Zone Expandable Switching Relay w/ Priority (ZSR104)

Compatible with 2, 3 and 4-wire thermostats or other low voltage controllers with switching action120 VAC inputHeavy duty, sealed, fuse protected relay (with spare fuse)1 primary pump output and 3 to 6 (model dependent) zone pump outputs (120 VAC/5 A each)Zone priority selectable with 1-hour time-out featureConvenient R,W,C and T,T,COM dual labeling at thermostat terminalsDHW (ZR/ZC) dry contacts rated for switching line voltageHigh capacity 12 VA or 20 VA transformer (model dependent)Automatic resettable fuse on 24 V circuitSelectable post purgeSelectable pump exercising3 pump ground terminals for simplified wiringExpandable to unlimited number of zones using simple 3-wire connection between controlsLarge screw terminals for ease of wiringFront panel LED indicator light for functional statusETL certified to CSA and UL standards

Price: 259.91 USD

SKU: 5335

Weight: 2.00 lb(s)

Stock quantity: 5

2670. 4" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 21.90 USD
SKU: 3342
Weight: 0.82 lb(s)
Stock quantity: 0

2671. 4" Black 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 50.20 USD
SKU: 2367
Weight: 7.50 lb(s)
Stock quantity: 3

2672. 4" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 44.26 USD
SKU: 3151
Weight: 9.80 lb(s)
Stock quantity: 7

2673. 4" Black Cap

Use to close off one end of a pipe Meets ASTM and ASME standards

Price: 12.87 USD
SKU: 442
Weight: 4.22 lb(s)
Stock quantity: 8

2674. 4" Black Cast Iron Steam 45° Elbow (Imported)

Price: 85.93 USD
SKU: 1288
Weight: 9.00 lb(s)
Stock quantity: 5

2675. 4" Black Cast Iron Steam 90° Elbow (Imported)

Price: 65.45 USD
SKU: 909
Weight: 9.20 lb(s)
Stock quantity: 3

2676. 4" Black Cast Iron Steam Tee (Imported)

Price: 96.05 USD
SKU: 1028
Weight: 9.22 lb(s)
Stock quantity: 3

2677. 4" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 38.21 USD
SKU: 200
Weight: 5.97 lb(s)
Stock quantity: 10

2678. 4" Black J HOOK

Price: 6.44 USD
SKU: 4040
Stock quantity: 0

2679. 4" Black Plug

For use in gas, oil, and air applicationsMeets ASTM and ASME standards

Price: 13.12 USD
SKU: 405
Weight: 2.79 lb(s)
Stock quantity: 3

2680. 4" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 46.60 USD
SKU: 3708
Weight: 12.50 lb(s)
Stock quantity: 4

2681. 4" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 77.40 USD
SKU: 128
Weight: 8.26 lb(s)
Stock quantity: 2

2682. 4" Brass Plug

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 49.00 USD
SKU: 1450
Weight: 2.90 lb(s)
Stock quantity: 0

2683. 4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 97.20 USD
SKU: 2037
Weight: 6.15 lb(s)
Stock quantity: 2

2684. 4" Copper 45° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 52.80 USD
SKU: 1995
Weight: 3.75 lb(s)

2685. 4" Copper 90° Elbow

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 58.16 USD
SKU: 2012
Weight: 3.90 lb(s)

2686. 4" Copper Caps

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 35.28 USD
SKU: 1874
Weight: 1.53 lb(s)

2687. 4" Copper Coupling (Socket) w/Tube Stop

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 31.76 USD
SKU: 1919
Weight: 1.00 lb(s)
Stock quantity: 9

2688. 4" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 3.47 USD
SKU: 1338
Weight: 0.91 lb(s)
Stock quantity: 32

2689. 4" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69

Price: 5.65 USD
SKU: 1340
Weight: 1.67 lb(s)
Stock quantity: 11

2690. 4" Copper Epoxy Coated Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 4.09 USD
SKU: 1331
Weight: 0.90 lb(s)
Stock quantity: 26

2691. 4" Copper Epoxy Coated Strut Clamp

Price: 4.55 USD
SKU: 2132
Weight: 0.61 lb(s)
Stock quantity: 70

2692. 4" Copper Slip Coupling (Socket)

Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 27.23 USD
SKU: 5584
Weight: 2.02 lb(s)
Stock quantity: 2

2693. 4" Copper x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 12.17 USD
SKU: 3565
Weight: 0.82 lb(s)
Stock quantity: 0

2694. 4" Copper x 1/2" Wall Thickness 6 ft. Length Thermacell Insulation

Price: 25.29 USD
SKU: 3967
Weight: 0.40 lb(s)
Stock quantity: 4

2695. 4" Copper x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 9.99 USD
SKU: 3845
Weight: 0.82 lb(s)
Stock quantity: 54

2696. 4" Copper x 3/8" Wall Thickness 6 ft. Length Thermacell Insulation

Price: 18.17 USD
SKU: 8277
Weight: 0.40 lb(s)
Stock quantity: 0

2697. 4" Copper x Female Adapter

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 74.25 USD
SKU: 1883
Weight: 0.04 lb(s)

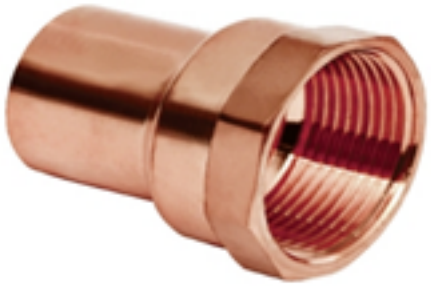

2698. 4" Copper x Male Adapter

Adapts a solder connection to a threaded connectionDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 69.80 USD
SKU: 2166
Weight: 3.28 lb(s)

2699. 4" Double Check Detector ASSEMBL

Lead FreeMaximum working pressure 175 psiTemperature range 32°F to 140°F

Price: 1491.60 USD
SKU: 4811
Weight: 60.00 lb(s)
Stock quantity: 0

2700. 4" Double Check Detector ASSEMBL (709DCDA)

Maximum working pressure 175 psiTemperature range 33°F to 110°F Maximum flow at low pressure dropRequire no special tools for servicingMeets in AWWA Standard C510

Price: 1843.44 USD
SKU: 3932
Weight: 60.00 lb(s)

2701. 4" Flanged Gate Valve (125)

Price: 253.75 USD
SKU: 3712
Weight: 50.00 lb(s)
Stock quantity: 0

2702. 4" Flexible Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 5.31 USD
SKU: 3042
Weight: 0.90 lb(s)
Stock quantity: 6

2703. 4" Flexible Pipe Cap

Rated for underground Flexes with ground movement Flexible Connectors are leak-proof, rot-proof and sealed against infiltration and exfiltrationConforms to CSA B602, certified and UPC approved

Price: 3.16 USD
SKU: 2659
Weight: 0.50 lb(s)
Stock quantity: 31

2704. 4" FTG x Copper 45° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 124.58 USD
SKU: 4423
Weight: 0.52 lb(s)

2705. 4" FTG x Copper 90° Street Elbow

Dezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 75.07 USD
SKU: 4416
Weight: 4.07 lb(s)

2706. 4" Galvanized 45° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 46.13 USD
SKU: 2873
Weight: 7.57 lb(s)
Stock quantity: 2

2707. 4" Galvanized 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 48.06 USD
SKU: 2861
Weight: 9.99 lb(s)
Stock quantity: 0

2708. 4" Galvanized Cap

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 20.50 USD
SKU: 2
Weight: 4.22 lb(s)
Stock quantity: 0

2709. 4" Galvanized Clevis Hanger

Pipe Size: 4"Max. Rec. Load: 1430 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 2.95 USD
SKU: 3761
Weight: 1.35 lb(s)
Stock quantity: 211

2710. 4" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 36.74 USD
SKU: 10
Weight: 5.97 lb(s)
Stock quantity: 2

2711. 4" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 4.95 USD

SKU: 1416

Weight: 2.21 lb(s)

Stock quantity: 182

2712. 4" Galvanized Split Ring Hanger

Approvals: Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69

Price: 5.45 USD
SKU: 1564
Weight: 0.70 lb(s)
Stock quantity: 52

2713. 4" Galvanized Strut Clamp

Price: 1.88 USD
SKU: 1500
Weight: 0.66 lb(s)
Stock quantity: 104

2714. 4" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 56.41 USD
SKU: 2997
Weight: 12.46 lb(s)
Stock quantity: 1

2715. 4" Galvanized Two Hole Strap

Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.May be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4” X 1” tek type screwsApprovals: Underwriters Laboratories listed for US and Canada.

Price: 1.68 USD
SKU: 1743
Weight: 0.51 lb(s)
Stock quantity: 30

2716. 4" Galvanized Union

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 111.92 USD
SKU: 3542
Weight: 8.26 lb(s)
Stock quantity: 0

2717. 4" Grooved Butterfly Control Valve

Approvals:UL, ULC, FM Factory installed UL Listed and FM Approved Double Tamper Switch for indoor and outdoor use

Price: 238.70 USD
SKU: 4118
Weight: 25.35 lb(s)
Stock quantity: 2

2718. 4" Grooved Butterfly Valve

300 PSIMaximum Working Temperature 200° F

Price: 315.83 USD
SKU: 259
Weight: 12.50 lb(s)
Stock quantity: 1

2719. 4" Grooved Check Valve

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 159.65 USD
SKU: 4111
Weight: 14.00 lb(s)

2720. 4" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 9.01 USD
SKU: 171
Weight: 3.20 lb(s)
Stock quantity: 106

2721. 4" Grooved Split Flange

Made of durable, high-strength ductile iron comforming to ASTM A536

Price: 38.78 USD
SKU: 3600
Weight: 8.00 lb(s)
Stock quantity: 5

2722. 4" Hole Saw Pilot Bit

Shank: 1/4" 60mm (2-3/8 in) cutting depth for deeper holes in one pass and increased productivity Snap-Lock Plus™ mandrel system allows a quick and easy change with no down time Fits all Diablo Snap-Lock Plus™ mandrels

Price: 4.07 USD
SKU: 8663
Weight: 0.05 lb(s)
Stock quantity: 5

2723. 4" Husky Coupling (4000 Series)

Extra width for lateral supportAdditional sealing clamps for better load distribution and a more positive seal304 stainless steel heavy duty construction. Shield color coated orangeMeets ASTM C-1540 standard specification for Heavy Duty shielded couplings

Price: 11.65 USD
SKU: 4226
Weight: 0.90 lb(s)
Stock quantity: 37

2724. 4" IPS Ball Valve

Full Port Ball Valve Thread Conform ANSI B1.20.1 Forged Brass Body Blow Out Proof Stem Design Packing Nut & Packing On The Stem Seal Stainless Steel Ball 600 psi (WOG) 150 psi (WSP) Service Tempature Range : -20° F to 300° F CSA Approved, Per NSF / ANSI-61

Price: 168.22 USD
SKU: 4261
Weight: 17.40 lb(s)
Stock quantity: 1

2725. 4" IPS Brass Flange

Price: 151.58 USD
SKU: 1513
Weight: 6.70 lb(s)
Stock quantity: 0

2726. 4" IPS Gate Valve

Pressure rating 200 psi wogTemperaure rating is 180°FCast brass constructionConforms to NSF / ANSI 372, AB 1953

Price: 141.47 USD
SKU: 4383
Weight: 18.00 lb(s)
Stock quantity: 1

2727. 4" IPS Swing Check Valve

Lead FreeCast brass swing check valve125 WSP, 200 WOGApproved By UPC, NSF

Price: 143.22 USD
SKU: 4376
Weight: 11.40 lb(s)

2728. 4" IPS x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 12.17 USD
SKU: 3577
Weight: 0.82 lb(s)
Stock quantity: 0

2729. 4" IPS x 1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 9.99 USD
SKU: 2310
Weight: 0.82 lb(s)
Stock quantity: 20

2730. 4" IPS x 2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 26.35 USD
SKU: 4482
Weight: 0.82 lb(s)
Stock quantity: 0

2731. 4" No Hub Adjustable Floor Drain

Cast iron threaded adjustable adaptorRound polished bronze Image may not represent actual product

Price: 60.90 USD
SKU: 4685
Weight: 6.00 lb(s)
Stock quantity: 26

2732. 4" No Hub Cast Iron 1/16 Bend

Cast-iron constructionMinimum service temperature 32°F and Maximum 212°FIAPMO certified and NSF listed Excellent sound-deadening qualitiesWithout a hubNot intended for pressure use

Price: 9.57 USD
SKU: 6533
Weight: 3.44 lb(s)
Stock quantity: 17

2733. 4" No Hub Cast Iron 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 9.76 USD
SKU: 6572
Weight: 6.50 lb(s)
Stock quantity: 51

2734. 4" No Hub Cast Iron 1/8 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 6.70 USD
SKU: 6450
Weight: 4.00 lb(s)
Stock quantity: 48

2735. 4" No Hub Cast Iron Blind Cap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 8.15 USD
SKU: 7522
Weight: 2.00 lb(s)
Stock quantity: 14

2736. 4" No Hub Cast Iron Cleanout Ferrule with Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 25.07 USD
SKU: 7527
Weight: 3.17 lb(s)
Stock quantity: 7

2737. 4" No Hub Cast Iron Cleanout Tee With Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 37.49 USD
SKU: 7523
Weight: 10.05 lb(s)
Stock quantity: 0

2738. 4" No Hub Cast Iron Double 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 27.16 USD
SKU: 7644
Weight: 9.70 lb(s)
Stock quantity: 14

2739. 4" No Hub Cast Iron Double Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 48.44 USD
SKU: 7525
Weight: 10.97 lb(s)
Stock quantity: 1

2740. 4" No Hub Cast Iron Double Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 53.58 USD
SKU: 7526
Weight: 12.14 lb(s)
Stock quantity: 2

2741. 4" No Hub Cast Iron Long Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 29.69 USD
SKU: 7530
Weight: 12.30 lb(s)
Stock quantity: 5

2742. 4" No Hub Cast Iron P-Trap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 39.97 USD
SKU: 6547
Weight: 17.00 lb(s)
Stock quantity: 2

2743. 4" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 14.89 USD
SKU: 6457
Weight: 8.90 lb(s)
Stock quantity: 29

2744. 4" No Hub Cast Iron Short Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 17.20 USD
SKU: 7532
Weight: 8.10 lb(s)
Stock quantity: 29

2745. 4" No Hub Cast Iron Upright Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 57.22 USD
SKU: 7645
Weight: 12.90 lb(s)
Stock quantity: 0

2746. 4" No Hub Cast Iron Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 14.76 USD
SKU: 6458
Weight: 9.50 lb(s)
Stock quantity: 44

2747. 4" No Hub Floor Drain

Pressure rating: maximum 4.3 PSI Temperature rating: minimum 32°F, maximum 212°FHigh resistance to both corrosion and abrasion

Price: 21.89 USD
SKU: 380
Weight: 5.50 lb(s)
Stock quantity: 16

2748. 4" No Hub Heavy Duty Coupling

Standard couplings shall conform to the requirements contained in the latest edition of ASTM C1540Shield assembly, clamp, band, and screw housing shall be made from series 301 stainless steel, and the screw made from series 304 stainless steelGaskets shall comply with requirements contained in the latest edition of ASTM C564

Price: 6.94 USD
SKU: 831
Weight: 0.80 lb(s)
Stock quantity: 137

2749. 4" No Hub Roof Drain

High resistance to both corrosion and abrasion

Price: 42.05 USD
SKU: 795
Weight: 15.20 lb(s)
Stock quantity: 9

2750. 4" No-Hub Coupling

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certifiedCouplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310Neoprene rubber gasket meets/exceeds ASTM C 564Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 2.82 USD

SKU: 805

Weight: 0.42 lb(s)

Stock quantity: 728

2751. 4" OS&Y Flanged Valve (200)

Maximum working pressure: 200 psi

Price: 353.80 USD
SKU: 3584
Weight: 50.00 lb(s)
Stock quantity: 5

2752. 4" PVC Check Valve (Solvent)

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 60.45 USD
SKU: 6039
Weight: 2.50 lb(s)

2753. 4" PVC Check Valve (Threaded)

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 60.45 USD
SKU: 50002
Weight: 2.50 lb(s)

2754. 4" PVC DWV 45° Elbow (HUB x HUB)

Sometimes called a "Street Eighth Bend".Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 5.20 USD
SKU: 809
Weight: 1.80 lb(s)
Stock quantity: 37

2755. 4" PVC DWV 45° Street Elbow (HUB x SPIGOT)

Sometimes called a "Street Eighth Bend".Maximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 5.04 USD
SKU: 6577
Weight: 1.70 lb(s)
Stock quantity: 25

2756. 4" PVC DWV 90° Elbow

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 6.39 USD
SKU: 728
Weight: 2.40 lb(s)
Stock quantity: 45

2757. 4" PVC DWV Cap (HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 5.94 USD
SKU: 834
Weight: 0.80 lb(s)
Stock quantity: 10

2758. 4" PVC DWV Coupling

Maximum service temperature 140°FDo not test or use with compressed air or other gasesHub x hub connectionsASTM D2665NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 3.23 USD
SKU: 990
Weight: 0.90 lb(s)
Stock quantity: 34

2759. 4" PVC DWV Double Sanitary Tee (ALL HUB)

Price: 20.27 USD
SKU: 928
Weight: 3.60 lb(s)
Stock quantity: 4

2760. 4" PVC DWV Double Wye (ALL HUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 29.25 USD
SKU: 3844
Weight: 4.20 lb(s)
Stock quantity: 2

2761. 4" PVC DWV DoubleSanitary Tee (HUB x HUB x HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 8.73 USD
SKU: 919
Stock quantity: 18

2762. 4" PVC DWV Female Adapter (HUB x FIP)

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 4.05 USD
SKU: 840
Weight: 0.90 lb(s)
Stock quantity: 4

2763. 4" PVC DWV Fitting Adapter (SPIGOT x FIP)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 4.90 USD
SKU: 983
Weight: 0.80 lb(s)
Stock quantity: 2

2764. 4" PVC DWV Male Adapter

Maximum service temperature 140°FNot intended for pressure useASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedSize range 1¼" to 4"

Price: 6.03 USD
SKU: 970
Weight: 0.80 lb(s)
Stock quantity: 2

2765. 4" Shielded Transition Coupling (Cast Iron to PVC, Steel, Extra Heavy Cast Iron)

Corrosion-resistant 300 Series stainless steel componentMaximum working pressure of 4.3 psi Neoprene rubber sleeve conforms to ASTM C 564Certified to ASTM C-1460, CSA B602

Price: 6.65 USD
SKU: 6546
Weight: 0.56 lb(s)
Stock quantity: 38

2766. 4" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 650 lbs.Pipe Size: 4"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69

Price: 1.01 USD
SKU: 1920
Weight: 0.30 lb(s)
Stock quantity: 53

2767. 4" Standard Grooved 45° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 10.51 USD
SKU: 92
Weight: 5.50 lb(s)
Stock quantity: 20

2768. 4" Standard Grooved 90° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 12.33 USD
SKU: 111
Weight: 7.80 lb(s)
Stock quantity: 25

2769. 4" Standard Grooved Cap

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 6.99 USD
SKU: 4191
Weight: 0.70 lb(s)
Stock quantity: 10

2770. 4" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 18.67 USD
SKU: 3346
Weight: 11.80 lb(s)
Stock quantity: 3

2771. 4" Sweat Ball Valve

Pressure rating 200 psi wogTemperaure range: - 20°F to 300°FForged brass bodyConforms to: ASME B16.22Approved to: UL 125, Per NSF/ANSI-61, NSF/ANSI-372, IGC-157

Price: 154.00 USD
SKU: 4915
Weight: 17.42 lb(s)
Stock quantity: 0

2772. 4" Sweat Brass Flange (8 hole)

Price: 103.80 USD
SKU: 4288
Weight: 6.70 lb(s)
Stock quantity: 3

2773. 4" Sweat Check Valve

For installing on copper pipe using standard copper soldering method Arrow on the valve body shows direction of the flow Suitable for upright horizontal and vertical (arrow pointing upward) installations in plumbing and heating systems Pressure Ratings: 200 psi Non-Shock WOG Construction: Lead-Free Brass Body

Price: 131.20 USD

SKU: 3304

Weight: 10.24 lb(s)

2774. 4" Test Plug

Large wing nut for easy operationGalvanized steel flange with molded rubber gasket

Price: 3.55 USD
SKU: 1538
Weight: 0.72 lb(s)
Stock quantity: 31

2775. 4" Waterflow Alarm Switch with Retard

NEMA 4/IP54 Rated Enclosure suitable for indoor or outdoor use with factory installed gasket and die-cast housing when used with appropriate conduit fittingTemperature Range: 40°F - 120°FNon-corrosive sleeve factory installed in saddle

Price: 158.99 USD
SKU: 4739
Weight: 4.80 lb(s)
Stock quantity: 6

2776. 4" x 1" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 55.80 USD
SKU: 4012
Weight: 7.39 lb(s)
Stock quantity: 2

2777. 4" x 1" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 16.51 USD
SKU: 155
Weight: 5.50 lb(s)
Stock quantity: 26

2778. 4" x 10' Innoflue Pipe

Price: 83.40 USD
SKU: 8546
Stock quantity: 13

2779. 4" x 10' SCH 40 Black Pipe

Price: 106.47 USD
SKU: 1091
Stock quantity: 16

2780. 4" x 10' SCH 40 Black Pipe GG

Price: 147.85 USD
SKU: 7617
Stock quantity: 6

2781. 4" x 10' SCH 40 Galvanized Pipe

Price: 125.14 USD
SKU: 6322
Stock quantity: 3

2782. 4" x 10' SCH 40 PVC DWV Pipe

Price: 22.51 USD
SKU: 6513
Stock quantity: 28

2783. 4" x 10' Type L Copper Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.110"

Price: 238.07 USD
SKU: 2959
Weight: 53.80 lb(s)
Stock quantity: 7

2784. 4" x 10" No Hub Cast Iron Pipe

Cast-iron construction 212° F maximum working temperature For non-pressure applications Noncombustible and offers superior sound-deadening performance Conform to ASTM A 888 and CISPI Standard 301

Price: 73.63 USD
SKU: 6410
Weight: 71.20 lb(s)
Stock quantity: 55

2785. 4" x 10.6 SCH 10 Black Pipe GG

Price: 58.58 USD
SKU: 1102
Stock quantity: 37

2786. 4" x 1-1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 14.11 USD
SKU: 4817
Weight: 2.79 lb(s)
Stock quantity: 2

2787. 4" x 1-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 55.49 USD
SKU: 4020
Weight: 7.87 lb(s)
Stock quantity: 2

2788. 4" x 1-1/2" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 15.05 USD
SKU: 3453
Weight: 2.79 lb(s)
Stock quantity: 0

2789. 4" x 1-1/2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 41.42 USD
SKU: 459
Weight: 4.59 lb(s)
Stock quantity: 0

2790. 4" x 1-1/2" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 20.24 USD
SKU: 144
Weight: 5.50 lb(s)
Stock quantity: 29

2791. 4" x 1-1/4" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 19.38 USD
SKU: 129
Weight: 5.50 lb(s)
Stock quantity: 39

2792. 4" x 12' Innoflue Pipe

Price: 18.86 USD
SKU: 8265
Stock quantity: 21

2793. 4" x 2" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 51.71 USD
SKU: 3209
Weight: 5.06 lb(s)
Stock quantity: 1

2794. 4" x 2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 13.41 USD
SKU: 270
Weight: 2.82 lb(s)
Stock quantity: 2

2795. 4" x 2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 30.56 USD
SKU: 2915
Weight: 4.71 lb(s)
Stock quantity: 1

2796. 4" x 2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 54.45 USD
SKU: 4332
Weight: 8.47 lb(s)
Stock quantity: 1

2797. 4" x 2" Brass Tee

Brass fittings provide great longevity and superior corrosion resistanceMax. pressure: 125 psiTemp. range: -20° to 400°F
Material is to ASTM B62 standardMeets all applicable ANSI standards

Price: 200.38 USD
SKU: 1136
Weight: 9.60 lb(s)
Stock quantity: 0

2798. 4" x 2" Copper Reducer Coupling

Price: 43.20 USD
SKU: 1950
Weight: 1.17 lb(s)
Stock quantity: 2

2799. 4" x 2" FTG x C Copper Reducer Fitting Adapter

Price: 40.72 USD
SKU: 4828
Weight: 2.12 lb(s)
Stock quantity: 3

2800. 4" x 2" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 13.27 USD
SKU: 3165
Weight: 2.82 lb(s)
Stock quantity: 0

2801. 4" x 2" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 37.67 USD
SKU: 449
Weight: 4.71 lb(s)
Stock quantity: 0

2802. 4" x 2" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 63.76 USD
SKU: 4164
Weight: 8.47 lb(s)
Stock quantity: 0

2803. 4" x 2" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 21.46 USD
SKU: 4186
Weight: 5.30 lb(s)
Stock quantity: 24

2804. 4" x 2" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 8.64 USD
SKU: 231
Weight: 2.00 lb(s)
Stock quantity: 5

2805. 4" x 2" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 11.74 USD
SKU: 1284
Weight: 2.60 lb(s)
Stock quantity: 2

2806. 4" x 2" No Hub Cast Iron Double Sanitary Tee

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 32.65 USD
SKU: 7649
Weight: 7.33 lb(s)
Stock quantity: 2

2807. 4" x 2" No Hub Cast Iron Double Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 29.62 USD
SKU: 7650
Weight: 6.48 lb(s)
Stock quantity: 1

2808. 4" x 2" No Hub Cast Iron Sanitary Tap Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 32.11 USD
SKU: 7651
Weight: 5.80 lb(s)
Stock quantity: 0

2809. 4" x 2" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 10.23 USD
SKU: 6452
Weight: 5.30 lb(s)
Stock quantity: 29

2810. 4" x 2" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 4.19 USD
SKU: 7533
Weight: 2.27 lb(s)
Stock quantity: 26

2811. 4" x 2" No Hub Cast Iron Upright Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 21.74 USD
SKU: 7652
Weight: 7.70 lb(s)
Stock quantity: 0

2812. 4" x 2" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 9.81 USD
SKU: 6454
Weight: 5.47 lb(s)
Stock quantity: 43

2813. 4" x 2" PVC DWV Double Sanitary Tee (ALL HUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 14.40 USD
SKU: 1240
Weight: 3.60 lb(s)
Stock quantity: 1

2814. 4" x 2" PVC DWV Double Wye (ALL HUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 39.40 USD
SKU: 4629
Weight: 1.80 lb(s)
Stock quantity: 2

2815. 4" x 2" PVC DWV Reducer Coupling (HUBxHUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness.Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 4.86 USD
SKU: 2601
Weight: 0.80 lb(s)
Stock quantity: 13

2816. 4" x 2" PVC DWV Sanitary Tee (HUB x HUB x HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 9.00 USD
SKU: 1292
Weight: 1.60 lb(s)
Stock quantity: 10

2817. 4" x 2" PVC DWV Wye (HUBxHUBxHUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness

Price: 6.84 USD
SKU: 1045
Weight: 2.10 lb(s)
Stock quantity: 18

2818. 4" x 2" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 4.64 USD
SKU: 3482
Weight: 0.84 lb(s)
Stock quantity: 2

2819. 4" x 2" Reducing No-Hub Coupling

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certifiedCouplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310Neoprene rubber gasket meets/exceeds ASTM C 564Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 6.45 USD

SKU: 2392

Weight: 1.15 lb(s)

Stock quantity: 17

2820. 4" x 2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 23.32 USD
SKU: 3335
Weight: 8.80 lb(s)
Stock quantity: 9

2821. 4" x 2-1/2" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 10.08 USD
SKU: 255
Weight: 3.20 lb(s)
Stock quantity: 2

2822. 4" x 2-1/2" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 30.62 USD
SKU: 3154
Weight: 4.59 lb(s)
Stock quantity: 2

2823. 4" x 2-1/2" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 45.00 USD
SKU: 4510
Weight: 9.44 lb(s)
Stock quantity: 1

2824. 4" x 2-1/2" Copper Reducer Coupling

Price: 44.96 USD
SKU: 1949
Weight: 1.74 lb(s)
Stock quantity: 3

2825. 4" x 2-1/2" Galvanized Bushing

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 15.05 USD
SKU: 3144
Weight: 3.20 lb(s)
Stock quantity: 0

2826. 4" x 2-1/2" Galvanized Coupling

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 37.67 USD
SKU: 37
Weight: 5.20 lb(s)
Stock quantity: 0

2827. 4" x 2-1/2" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 20.75 USD
SKU: 3310
Weight: 6.00 lb(s)
Stock quantity: 6

2828. 4" x 2-1/2" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 12.65 USD
SKU: 1025
Weight: 2.20 lb(s)
Stock quantity: 5

2829. 4" x 2-1/2" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 26.82 USD
SKU: 3802
Weight: 2.50 lb(s)
Stock quantity: 4

2830. 4" x 2-1/2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 18.99 USD
SKU: 3332
Weight: 9.00 lb(s)
Stock quantity: 24

2831. 4" x 24' Flue Pipe

Price: 3.80 USD
SKU: 2748
Stock quantity: 36

2832. 4" x 24' Innoflue Pipe

Price: 27.15 USD
SKU: 8266
Stock quantity: 21

2833. 4" x 3" Black 90° Elbow

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Material meeting with ASTM A-197 standardsMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 38.20 USD
SKU: 39
Weight: 6.36 lb(s)
Stock quantity: 2

2834. 4" x 3" Black Bushing

Used to reduce size of a pipe or fittingMeets ASTM and ASME standards

Price: 10.26 USD
SKU: 251
Weight: 3.03 lb(s)
Stock quantity: 0

2835. 4" x 3" Black Coupling

Use to connect 2 pieces of pipe of the same size in a straight, in-line runMeets ASTM standard

Price: 32.67 USD
SKU: 191
Weight: 5.83 lb(s)
Stock quantity: 2

2836. 4" x 3" Black Tee

Connection: threaded Meets ANSI/ASME B1.20.1 and ASTM A-197 standards

Price: 53.10 USD
SKU: 4504
Weight: 10.63 lb(s)
Stock quantity: 1

2837. 4" x 3" Copper Reducer Coupling

Price: 39.50 USD
SKU: 1948
Weight: 1.77 lb(s)
Stock quantity: 2

2838. 4" x 3" FTG x C Copper Reducer Fitting Adapter

Price: 37.24 USD
SKU: 1982
Weight: 1.77 lb(s)
Stock quantity: 2

2839. 4" x 3" Galvanized Bushing

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 14.06 USD
SKU: 3474
Weight: 3.03 lb(s)
Stock quantity: 0

2840. 4" x 3" Galvanized Coupling

Connection: Threaded Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 37.67 USD
SKU: 66
Weight: 5.83 lb(s)
Stock quantity: 0

2841. 4" x 3" Galvanized Tee

Connection: Threaded (female x female)Threaded ends meeting with ANSI/ASME B1.20.1 standards Certified to NSF 61Coating: GalvanizedMaximum working temperature: 300° FMaximum working pressure: 150 psi

Price: 65.92 USD
SKU: 3562
Weight: 10.63 lb(s)
Stock quantity: 0

2842. 4" x 3" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 22.16 USD
SKU: 4194
Weight: 5.50 lb(s)
Stock quantity: 2

2843. 4" x 3" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 13.29 USD
SKU: 170
Weight: 2.90 lb(s)
Stock quantity: 2

2844. 4" x 3" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 12.69 USD
SKU: 4189
Weight: 2.80 lb(s)
Stock quantity: 2

2845. 4" x 3" No Hub Cast Iron Double Sanitary Tee

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 39.35 USD
SKU: 7655
Weight: 8.54 lb(s)
Stock quantity: 2

2846. 4" x 3" No Hub Cast Iron Double Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 33.48 USD
SKU: 7656
Weight: 8.85 lb(s)
Stock quantity: 5

2847. 4" x 3" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 12.18 USD
SKU: 6543
Weight: 7.57 lb(s)
Stock quantity: -7

2848. 4" x 3" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 5.46 USD
SKU: 7534
Weight: 2.27 lb(s)
Stock quantity: 23

2849. 4" x 3" No Hub Cast Iron Upright Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 28.93 USD
SKU: 7657
Weight: 10.10 lb(s)
Stock quantity: 0

2850. 4" x 3" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 13.16 USD
SKU: 6538
Weight: 7.28 lb(s)
Stock quantity: 16

2851. 4" x 3" PVC DWV Closet Flange FTG w/Metal Ring (SPIGOT)

Meets ASTM D2665NSF ListedDo not use with compressed air or other gasesMaximum service temperature 140F

Price: 8.01 USD
SKU: 3478
Weight: 0.90 lb(s)
Stock quantity: 9

2852. 4" x 3" PVC DWV Closet Flange w/Metal Ring (HUB)

Meets ASTM D2665NSF ListedDo not use with compressed air or other gasesMaximum service temperature 140F

Price: 6.39 USD
SKU: 3113
Weight: 0.90 lb(s)
Stock quantity: 5

2853. 4" x 3" PVC DWV Double Sanitary Tee (ALL HUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 16.54 USD
SKU: 1267
Weight: 4.00 lb(s)
Stock quantity: 4

2854. 4" x 3" PVC DWV PLASTIC Closet Flange

Meets ASTM D2665NSF ListedDo not use with compressed air or other gasesMaximum service temperature 140F

Price: 3.60 USD
SKU: 2984
Weight: 0.75 lb(s)
Stock quantity: 6

2855. 4" x 3" PVC DWV Reducer Coupling (HUBxHUB)

Maximum service temperature 140°F Do not test or use with compressed air or other gasesPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness.Hub x hub connectionsASTM D2665 and D3311UL Listed 94V-0USF U.P. Certified

Price: 5.40 USD
SKU: 853
Weight: 0.90 lb(s)
Stock quantity: 7

2856. 4" x 3" PVC DWV Reducing Double Wye (ALL HUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 20.79 USD
SKU: 929
Weight: 2.40 lb(s)
Stock quantity: 1

2857. 4" x 3" PVC DWV Sanitary Tee (HUB x HUB x HUB)

Used in sanitary drain, waste, and vent (DWV), sewer and storm drainage applicationsMaximum service temperature 140°FNot for use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 11.07 USD
SKU: 1299
Weight: 2.20 lb(s)
Stock quantity: 7

2858. 4" x 3" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 4.81 USD
SKU: 3102
Weight: 0.80 lb(s)
Stock quantity: 1

2859. 4" x 3" Reducing No-Hub Coupling

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certifiedCouplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310Neoprene rubber gasket meets/exceeds ASTM C 564Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 6.45 USD

SKU: 967

Weight: 0.90 lb(s)

Stock quantity: 13

2860. 4" x 3" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 18.73 USD
SKU: 3305
Weight: 8.80 lb(s)
Stock quantity: 35

2861. 4" x 3"PVC DWV Wye (HUBxHUBxHUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness

Price: 9.09 USD
SKU: 1052
Weight: 2.80 lb(s)
Stock quantity: 11

2862. 4" x 36' Innoflue Pipe

Price: 38.25 USD
SKU: 8267
Stock quantity: 24

2863. 4" x 4" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 58.98 USD
SKU: 1769
Weight: 3.39 lb(s)
Stock quantity: 0

2864. 4" x 4" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 12.57 USD
SKU: 3405
Weight: 4.12 lb(s)
Stock quantity: 1

2865. 4" x 4" PVC DWV Closet Flange FTG w/Metal Ring (SPIGOT)

Meets ASTM D2665NSF ListedDo not use with compressed air or other gasesMaximum service temperature 140F

Price: 9.90 USD
SKU: 1301
Weight: 0.90 lb(s)
Stock quantity: 10

2866. 4" x 4" PVC DWV Closet Flange w/Metal Ring (HUB)

Meets ASTM D2665NSF ListedDo not use with compressed air or other gasesMaximum service temperature 140F

Price: 9.18 USD
SKU: 1294
Weight: 0.80 lb(s)
Stock quantity: 3

2867. 4" x 4" PVC DWV PLASTIC Closet Flange

Meets ASTM D2665NSF ListedDo not use with compressed air or other gasesMaximum service temperature 140F

Price: 3.60 USD
SKU: 8617
Weight: 0.80 lb(s)
Stock quantity: 4

2868. 4" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 10.82 USD
SKU: 711
Weight: 4.12 lb(s)
Stock quantity: 0

2869. 4" x 4" x 1" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 70.95 USD
SKU: 2130
Weight: 4.16 lb(s)

2870. 4" x 4" x 1-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 70.13 USD
SKU: 2128
Weight: 4.22 lb(s)

2871. 4" x 4" x 1-1/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 73.43 USD
SKU: 2129
Weight: 4.26 lb(s)

2872. 4" x 4" x 2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 75.07 USD
SKU: 2127
Weight: 4.43 lb(s)

2873. 4" x 4" x 2-1/2" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 84.97 USD
SKU: 2126
Weight: 4.96 lb(s)

2874. 4" x 4" x 3" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 81.58 USD
SKU: 2125
Weight: 5.65 lb(s)

2875. 4" x 4" x 3/4" C x C x C Tee

C x C x C connections Requires solder connection for useDezincification resistantConforms to NSF ANSI-61IAPMO ApprovedMeets ANSI 16 StandardsMaterial Specifications to ASTM B88

Price: 80.02 USD
SKU: 2131
Weight: 5.00 lb(s)

2876. 4" x 4" x 3/8" Black Fish Plate

Price: 3.61 USD
SKU: 1505
Weight: 0.19 lb(s)
Stock quantity: 0

2877. 4" x 4-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 13.51 USD
SKU: 3125
Weight: 4.71 lb(s)
Stock quantity: 2

2878. 4" x 4-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 12.23 USD
SKU: 700
Weight: 4.71 lb(s)
Stock quantity: 4

2879. 4" x 5" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 13.51 USD
SKU: 3537
Weight: 5.44 lb(s)
Stock quantity: 2

2880. 4" x 5" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 11.12 USD
SKU: 701
Weight: 5.44 lb(s)
Stock quantity: 1

2881. 4" x 5-1/2" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 14.98 USD
SKU: 3416
Weight: 6.07 lb(s)
Stock quantity: 2

2882. 4" x 5-1/2" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 11.64 USD
SKU: 703
Weight: 6.07 lb(s)
Stock quantity: 3

2883. 4" x 6" Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 66.96 USD
SKU: 8511
Weight: 5.51 lb(s)
Stock quantity: 5

2884. 4" x 6" Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 18.76 USD
SKU: 3360
Weight: 6.31 lb(s)
Stock quantity: 5

2885. 4" x 6" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 13.18 USD
SKU: 704
Weight: 6.31 lb(s)
Stock quantity: 4

2886. 4" x 72' Innoflue Pipe

Price: 53.85 USD
SKU: 8268
Stock quantity: 9

2887. 4" x CLOSE Brass Nipple

Lead-freeDurable and resists corrosionWorking temperature: -65°F-250°F Working pressure: up to 1200 PSIMeets or exceeds all applicable ANSI standards

Price: 46.82 USD
SKU: 1766
Weight: 2.20 lb(s)
Stock quantity: 0

2888. 4" x Close Galvanized Nipple

Galvanized steel (resists rust and corrosion)Durable constructionMale threaded connectionProduct meet all low-lead requirementsANSI/ASME B1.20.1 ASTM A-197

Price: 10.58 USD
SKU: 3684
Weight: 2.84 lb(s)
Stock quantity: 4

2889. 4" x Close SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 9.07 USD
SKU: 513
Weight: 2.84 lb(s)
Stock quantity: 2

2890. 4"Copper x 2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 24.22 USD
SKU: 974
Weight: 0.82 lb(s)
Stock quantity: 0

2891. 4"PVC DWV Wye (HUB x HUB xHUB)

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. CertifiedPolyvinyl chloride (PVC) is the most frequently specified of all thermoplastic materials because of its light weight, durability, and cost-effectiveness

Price: 11.07 USD
SKU: 6601
Weight: 3.60 lb(s)
Stock quantity: 20

2892. 4.1 kW Electric Tankless Water Heater

On demand hot water. Flow switch activates heater only on demand (no standby heat loss)Endless hot water – no storage capacity to run out Easy installation. No T&P relief valve needed (check local codes), only one cold water line need be brought to installation, mounts on wallHigh temperature limit switch with automatic resetOptional flow restricting aerator (for EX-DL models) ensures proper temperature rise. Standard with SP modelsNi Chrome element – a unique, patented flow path ensures optimum heat transfer and extended element life Min. Dynamic Operating Pressure: 35 PSIMax. Dynamic Operating Pressure: 150 PSIRhase: SingleAmperage: 20Wire Size: 12 AWGModel: SP4208

Price: 276.75 USD

SKU: 6382

Weight: 4.00 lb(s)

Stock quantity: -1

2893. 4.8 gal Hydronic Expansion Tank For Heating Systems

Certified synthetic SBR rubber diaphragmMIG welding eliminates interior rough spots and sharp edgesAll diaphragms designed to maximize drawdownExternal baked epoxy-polyester coating provides a durable appliance finishWelded side outlet allows easy and quick installationProtected pre charge valve eliminates potential leak pathLow profile tank design with full membrane depth eliminates stretching of diaphragm, providing increased life cycleModel FTH30Max. Operating Pressure: 60 psiOperating Temperature: 210° FFactory Precharge: 12 psi

Price: 38.10 USD

SKU: 2279

Weight: 6.80 lb(s)

Stock quantity: 6

2894. 4.8gal Thermal Expansion Tank For Hot Water Heater

All tanks are NSF61 CertifiedMIG welding eliminates interior rough spots and sharp edges150 psi max pressure ratingExternal baked epoxy-polyester coating provides a durable appliance finishExclusive polypropylene liner eliminates internal corrosionProtected precharge valve eliminates potential leak pathMax. Operating Pressure: 150 psiOperating Temperature: 210° FFactory Precharge: 40 psiModel: FTT12

Price: 46.45 USD

SKU: 5047

Weight: 10.00 lb(s)

Stock quantity: 2

2895. 4/10 HP Duplex Sewage System (1100-Series, Model 1103LE41M)

Heavy duty structural foam basin; 30" diameter x 36” high; 110 gallon capacity Completely assembled system with piping included Floats for control unit factory pre-set* 4" inlet hub with rubber pipe seal Heavy, 1/4" enamel coated steel cover with separate pump access covers and a 10" diameter inspection cover (Fiberglass cover assembly available) Pump restraints (torque-stops) hold pumps securely in proper position3" discharge

Price: 2011.50 USD

SKU: 8714

Weight: 210.00 lb(s)

Stock quantity: 0

2896. 4/10 HP Pro380 Simplex Sewage Package (Model P382LE41)

2" Discharge Separate access cover QuickTree® float system allows easy removal of floats without pulling the pump Shallow 24" basin for easier burial in difficult soil conditions Large 41 gallon capacity Anti-flotation collar Molded torque-stops Integrally molded handles Unique integrated cord seal technology Integral rubber cover seals

Price: 521.50 USD

SKU: 8504

Weight: 60.00 lb(s)

Stock quantity: 1

2897. 4/10 HP Sewage Pump (9SN-Series, Model 9SN-CIA-RF)

Permanent Split Capacitor (PSC) Energy-saving low amp draw Designed for continuous duty 2" FNPT (51 mm) and 3" FNPT (76.2 mm) discharge models Handles solids up to 2" (51 mm) diameter Multiple switch options for automatic operation 140 °F (60 °C) liquid temperature rating cCSAus listed

Price: 311.80 USD

SKU: 8664

Weight: 39.00 lb(s)

Stock quantity: 0

2898. 4/10 HP Sewage Pump (LE40-Series, Model LE41A)

Heavy cast iron construction Oil filled, thermally protected motor Permanently lubricated bearings Corrosion resistant, vortex style impeller made of high temperature engineering polymer All stainless steel fasteners and rotor shaft Quick-disconnect 10' standard power cord allows replacement of cord in seconds without breaking seals to motor. (25' length optional)Maximum fluid temperature 140˚F

Price: 303.24 USD

SKU: 8716

Weight: 40.00 lb(s)

Stock quantity: 2

2899. 40 gal ProMax® Gas Water Heater

The internal microprocessor provides enhanced operating parameters and tighter differentials for precise sensing and faster heating response to optimize performanceUses a thermopile to generate the power needed to operate the electronic gas control without requiring an external power source The electronic gas control incorporates an LED status indicator that monitors system operation & service diagnostics Dynaclean™ Diffuser Dip Tube helps reduce lime and sediment buildup, maximizes hot water output. Made from long-lasting PEX cross-linked polymerModel: XCV-40

Price: 627.75 USD

SKU: 4109

Weight: 138.00 lb(s)

Stock quantity: 3

2900. 400 psi Pressure Gauge

Price: 4.68 USD
SKU: 7612
Weight: 0.30 lb(s)
Stock quantity: 3

2901. 4-1/2" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 46.77 USD
SKU: 3531
Weight: 0.83 lb(s)
Stock quantity: 6

2902. 4-1/2" x 7/8" Abrasive Cut-Off Wheel

Extra-high cutting speed offering high productivityIdeal for cutting stainless steel thanks to low-burring and heat reducing featureContaminant-free, for use on stainless steel or steelUniversal Performance (UP) disc with a more flexible bond for lasting high performance and valueOSA certified product complies with the highest safety standardsArbor Size: 7/8"

Price: 2.88 USD
SKU: 8467
Weight: 0.01 lb(s)
Stock quantity: 308

2903. 4-1/4" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 31.17 USD
SKU: 3109
Weight: 0.85 lb(s)
Stock quantity: 3

2904. 4-1/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 23.77 USD
SKU: 4479
Weight: 0.84 lb(s)
Stock quantity: 2

2905. 5 Function Shower Head

Satin Nickel

Price: 17.60 USD
SKU: 4602
Weight: 0.50 lb(s)
Stock quantity: 1

2906. 5 Function Shower Set

Crome Plated

Price: 33.00 USD
SKU: 4740
Weight: 1.30 lb(s)
Stock quantity: 1

2907. 5 gal. Cryo-Tek™ Original Antifreeze

For heating systems requiring freeze protection as well as corrosion preventionUse in systems fabricated with metal, plastics (except CPVC) and rubber piping, fittings, seals and other partsBlend of 45 percent virgin propylene glycol and the triple protection inhibitor package

Price: 52.80 USD
SKU: 6611
Weight: 50.00 lb(s)
Stock quantity: 30

2908. 5 lbs. Sta Put Plumbers Putty

A plumbing sealing and caulking compound for setting plumbing fixtures, bowls, faucets, basin cocks, strainers, plugs, and sink frames.Will not stick to fingers or hands.Always the same smooth, uniform appearance from top to bottom of container with superior sealing qualities.Sta put will not harden, crumble, crack or shrink.It is flexible and stretchable, spreads easily, and can be molded into rings or shaped to the precise configuration needed. It provides a gas proof, fume proof, odor proof, insect proof and watertight seal.Meets Federal Specification TT-P-1536

Price: 608.58 USD

SKU: 4455

Weight: 6.00 lb(s)

Stock quantity: 0

2909. 5 Zone Valve Relay Control (AZ-5)

Transformer Voltage: 120V, 60 HZ, 75VA End Switch Contact Rating: 5A-1/8 HP @120VALED diagnostic lights for easy troubleshootingClearly marked terminal for easy and accurate installation

Price: 162.56 USD
SKU: 5463
Weight: 7.20 lb(s)
Stock quantity: 1

2910. 5" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 52.65 USD
SKU: 4101
Weight: 0.95 lb(s)
Stock quantity: 0

2911. 5" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 8.46 USD
SKU: 1348
Weight: 1.90 lb(s)
Stock quantity: 23

2912. 5" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69

Price: 11.53 USD
SKU: 1350
Weight: 2.42 lb(s)
Stock quantity: 6

2913. 5" Copper Epoxy Coated Strut Clamp

Price: 3.20 USD
SKU: 8407
Weight: 0.74 lb(s)
Stock quantity: 32

2914. 5" Copper x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 14.57 USD
SKU: 3581
Weight: 0.90 lb(s)
Stock quantity: 0

2915. 5" Flexible Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 7.47 USD
SKU: 3052
Weight: 1.38 lb(s)
Stock quantity: 3

2916. 5" Flexible Pipe Cap

Rated for underground Flexes with ground movement Flexible Connectors are leak-proof, rot-proof and sealed against infiltration and exfiltrationConforms to CSA B602, certified and UPC approved

Price: 4.25 USD
SKU: 2681
Weight: 0.50 lb(s)
Stock quantity: 5

2917. 5" Galvanized Clevis Hanger

Pipe Size: 5"Max. Rec. Load: 1430 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 6.42 USD
SKU: 3480
Weight: 1.88 lb(s)
Stock quantity: 13

2918. 5" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 7.74 USD

SKU: 8555

Weight: 3.64 lb(s)

Stock quantity: 17

2919. 5" Galvanized Strut Clamp

Price: 2.39 USD
SKU: 2731
Weight: 0.79 lb(s)
Stock quantity: 26

2920. 5" Grooved Butterfly Valve

300 PSIMaximum Working Temperature 200° F

Price: 569.40 USD
SKU: 3814
Weight: 18.00 lb(s)
Stock quantity: 0

2921. 5" Grooved Check Valve

For use up to 250 psi working pressure at 70°FFor horizontal and vertical installationLeak-tight sealMeets the ASTM A126 Made of durable cast iron, with a stainless-steel clapper, and E.P.D.M rubber facing

Price: 405.00 USD
SKU: 5303
Weight: 21.00 lb(s)

2922. 5" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 11.16 USD
SKU: 3574
Weight: 4.50 lb(s)
Stock quantity: 8

2923. 5" Grooved Split Flange

Made of durable, high-strength ductile iron comforming to ASTM A536

Price: 58.06 USD
SKU: 4234
Weight: 8.80 lb(s)
Stock quantity: 1

2924. 5" Husky Coupling (4000 Series)

Extra width for lateral supportAdditional sealing clamps for better load distribution and a more positive seal304 stainless steel heavy duty construction. Shield color coated orangeMeets ASTM C-1540 standard specification for Heavy Duty shielded couplings

Price: 24.44 USD
SKU: 4073
Weight: 1.70 lb(s)
Stock quantity: 20

2925. 5" IPS x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 14.57 USD
SKU: 5188
Weight: 0.90 lb(s)
Stock quantity: 0

2926. 5" No Hub Cast Iron 1/16 Bend

Cast-iron constructionMinimum service temperature 32°F and Maximum 212°FIAPMO certified and NSF listed Excellent sound-deadening qualitiesWithout a hubNot intended for pressure use

Price: 21.22 USD
SKU: 7535
Weight: 5.12 lb(s)
Stock quantity: 3

2927. 5" No Hub Cast Iron 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 21.51 USD
SKU: 7536
Weight: 9.30 lb(s)
Stock quantity: 5

2928. 5" No Hub Cast Iron 1/8 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 14.49 USD
SKU: 7537
Weight: 7.40 lb(s)
Stock quantity: 7

2929. 5" No Hub Cast Iron Blind Cap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 14.86 USD
SKU: 7538
Weight: 2.90 lb(s)
Stock quantity: 0

2930. 5" No Hub Cast Iron Cleanout Ferrule with Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 39.35 USD
SKU: 8244
Weight: 7.04 lb(s)
Stock quantity: 0

2931. 5" No Hub Cast Iron Cleanout Tee With Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 85.56 USD
SKU: 1754
Weight: 16.39 lb(s)
Stock quantity: 0

2932. 5" No Hub Cast Iron Long Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 43.24 USD
SKU: 7539
Weight: 18.60 lb(s)
Stock quantity: 7

2933. 5" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 34.56 USD
SKU: 7546
Weight: 12.53 lb(s)
Stock quantity: 4

2934. 5" No Hub Cast Iron Short Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 32.14 USD
SKU: 7540
Weight: 13.10 lb(s)
Stock quantity: 7

2935. 5" No Hub Cast Iron Upright Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 103.82 USD
SKU: 7894
Weight: 19.90 lb(s)
Stock quantity: 0

2936. 5" No Hub Cast Iron Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 33.73 USD
SKU: 7547
Weight: 15.09 lb(s)
Stock quantity: 0

2937. 5" No Hub Heavy Duty Coupling

Standard couplings shall conform to the requirements contained in the latest edition of ASTM C1540Shield assembly, clamp, band, and screw housing shall be made from series 301 stainless steel, and the screw made from series 304 stainless steelGaskets shall comply with requirements contained in the latest edition of ASTM C564

Price: 13.65 USD
SKU: 839
Weight: 1.30 lb(s)
Stock quantity: 26

2938. 5" No-Hub Coupling

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certifiedCouplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310Neoprene rubber gasket meets/exceeds ASTM C 564Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 7.48 USD

SKU: 6619

Weight: 0.90 lb(s)

Stock quantity: 46

2939. 5" Shielded Transition Coupling (Cast Iron to PVC, Steel, Extra Heavy Cast Iron)

Corrosion-resistant 300 Series stainless steel componentMaximum working pressure of 4.3 psi Neoprene rubber sleeve conforms to ASTM C 564Certified to ASTM C-1460, CSA B602

Price: 17.10 USD
SKU: 2359
Weight: 1.24 lb(s)
Stock quantity: 10

2940. 5" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 1000 lbs.Pipe Size: 5"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69

Price: 1.67 USD

SKU: 1928

Weight: 0.50 lb(s)

Stock quantity: 40

2941. 5" Standard Grooved 45° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 25.29 USD
SKU: 184
Weight: 8.50 lb(s)
Stock quantity: 5

2942. 5" Standard Grooved 90° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 25.29 USD
SKU: 207
Weight: 12.10 lb(s)
Stock quantity: 4

2943. 5" Standard Grooved Cap

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 13.55 USD
SKU: 4080
Weight: 1.14 lb(s)
Stock quantity: 2

2944. 5" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 37.40 USD
SKU: 4692
Weight: 19.20 lb(s)
Stock quantity: 2

2945. 5" Waterflow Alarm Switch with Retard

NEMA 4/IP54 Rated Enclosure suitable for indoor or outdoor use with factory installed gasket and die-cast housing when used with appropriate conduit fittingTemperature Range: 40°F - 120°FNon-corrosive sleeve factory installed in saddle

Price: 163.52 USD
SKU: 4754
Weight: 5.76 lb(s)
Stock quantity: 2

2946. 5" x 10' SCH 10 Black Pipe GG

Price: 97.28 USD
SKU: 1103
Stock quantity: 0

2947. 5" x 10' SCH 40 Black Pipe

Price: 132.00 USD
SKU: 448
Stock quantity: 0

2948. 5" x 10" No Hub Cast Iron Pipe

Cast-iron construction 212° F maximum working temperature For non-pressure applications Noncombustible and offers superior sound-deadening performance Conform to ASTM A 888 and CISPI Standard 301

Price: 80.33 USD
SKU: 7920
Weight: 97.60 lb(s)
Stock quantity: 18

2949. 5" x 2" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 25.98 USD
SKU: 7549
Weight: 8.28 lb(s)
Stock quantity: 4

2950. 5" x 2" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 14.09 USD
SKU: 7548
Weight: 3.31 lb(s)
Stock quantity: 2

2951. 5" x 2" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 24.87 USD
SKU: 7550
Weight: 8.81 lb(s)
Stock quantity: 3

2952. 5" x 2" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 10.08 USD
SKU: 4452
Weight: 0.90 lb(s)
Stock quantity: 0

2953. 5" x 2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 45.67 USD
SKU: 4883
Weight: 11.00 lb(s)
Stock quantity: 0

2954. 5" x 2"No Hub Cast Iron Upright Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 94.01 USD
SKU: 7893
Weight: 11.00 lb(s)
Stock quantity: 0

2955. 5" x 24' Flue Pipe

Price: 3.89 USD
SKU: 2747
Stock quantity: 17

2956. 5" x 3" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 28.56 USD
SKU: 257
Weight: 3.30 lb(s)
Stock quantity: 3

2957. 5" x 3" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 26.09 USD
SKU: 7895
Weight: 10.18 lb(s)
Stock quantity: 4

2958. 5" x 3" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 14.32 USD
SKU: 7914
Weight: 3.75 lb(s)
Stock quantity: 5

2959. 5" x 3" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 28.18 USD
SKU: 7882
Weight: 10.49 lb(s)
Stock quantity: 2

2960. 5" x 3" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 10.08 USD
SKU: 3489
Weight: 0.80 lb(s)
Stock quantity: 1

2961. 5" x 4" No Hub Cast Iron Double Sanitary Tee

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 69.97 USD
SKU: 7907
Weight: 13.38 lb(s)
Stock quantity: 0

2962. 5" x 4" No Hub Cast Iron Double Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 71.13 USD
SKU: 7932
Weight: 15.69 lb(s)
Stock quantity: 0

2963. 5" x 4" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 26.80 USD
SKU: 7896
Weight: 11.54 lb(s)
Stock quantity: 3

2964. 5" x 4" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 9.72 USD
SKU: 7915
Weight: 3.21 lb(s)
Stock quantity: 6

2965. 5" x 4" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 29.04 USD
SKU: 7883
Weight: 13.07 lb(s)
Stock quantity: 4

2966. 5" x 4" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 9.81 USD
SKU: 2699
Weight: 1.20 lb(s)
Stock quantity: 2

2967. 5.5 oz. Kwik Seal® Kitchen & Bath Adhesive Caulk (Clear)

100% waterproofProvides a durable, watertight seal Excellent adhesion and flexibilityTools easilyCured caulk is mildew resistantPaintableEasy water clean-up

Price: 3.85 USD
SKU: 4648
Weight: 0.40 lb(s)
Stock quantity: 141

2968. 5.5 oz. Kwik Seal® Kitchen & Bath Adhesive Caulk (White)

100% waterproofProvides a durable, watertight sealExcellent adhesion and flexibilityTools easilyCured caulk is mildew resistantPaintableEasy water clean-up

Price: 3.97 USD
SKU: 3883
Weight: 0.60 lb(s)
Stock quantity: -2

2969. 5/16" HSS Black & Gold Drill Bit

KFD Killer Force Drill Bits are manufactured from M2 premium grade high speed steelFor use in a wide range of materials in the iron and steel families such aluminum, iron, stainless steel and other hard metal drilling135 degree split point tip for self-centering and reducing thrust. Compared to a conventional 118 degree tip, these drills wont go "walking" on youBlack and gold surface treated for use in stainless steel and other hard metal drilling

Price: 2.62 USD
SKU: 2508
Weight: 0.05 lb(s)
Stock quantity: 10

2970. 5/16" Nut Driver

Price: 9.45 USD
SKU: 8502
Weight: 0.26 lb(s)
Stock quantity: 24

2971. 5/16" Screw Driver

Price: 20.31 USD
SKU: 8473
Weight: 0.30 lb(s)
Stock quantity: 3

2972. 5/16" x 2-1/4" Johni Bolt Kit

Price: 1.68 USD
SKU: 1718
Weight: 0.50 lb(s)
Stock quantity: 84

2973. 5/16" x 3-1/2" Johni Bolt Kit

Price: 1.88 USD
SKU: 2343
Weight: 0.70 lb(s)
Stock quantity: 42

2974. 5/8 PEX x 1/2" Sweat Copper Fitting Adapter

Price: 1.89 USD
SKU: 6056
Weight: 0.06 lb(s)
Stock quantity: 0

2975. 5/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 7.51 USD
SKU: 4348
Weight: 0.19 lb(s)
Stock quantity: 2

2976. 5/8" Black Junior Beam Clamp

Max. Pipe Size: 4"Max. Rec. Load: 400 lbs.Approvals: Complies with Federal Specifications A-A1192A (Type 19) and Manufacturers' Standardization Society ANSI/ MSS SPSP-58 (Type 19) which supersedes ANSI/MSS SP-69

Price: 2.23 USD
SKU: 1456
Weight: 0.39 lb(s)
Stock quantity: 0

2977. 5/8" Black Wide Mouth Beam Clamp

Malleable iron with hardened steel cup point set screw and locknutMax. Pipe Size: 8"Max. Rec. Load: 850 lbs.Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL). Complies with Federal Specifications A-A-1192A (Type 19) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 19) which supersedes ANSI/MSS SP-69

Price: 2.54 USD
SKU: 4251
Weight: 0.74 lb(s)
Stock quantity: 20

2978. 5/8" Comp. x 3/8" Comp. Angle Stop Valve

Lead Free (Chrome) Temperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 3.99 USD
SKU: 3505
Weight: 0.20 lb(s)
Stock quantity: 4

2979. 5/8" Comp. x 3/8" Comp. Straight Stop Valve

Lead Free (Chrome) For use in potable water distribution systemsTemperature rating: 40° to 140° Pressure rating: 125 psi maximumNSF/ ANSI 61, UPS

Price: 4.41 USD
SKU: 5149
Weight: 0.22 lb(s)
Stock quantity: 0

2980. 5/8" Compression Brass Sleeve

Price: 1.15 USD
SKU: 5181
Weight: 0.10 lb(s)
Stock quantity: 10

2981. 5/8" Compression Elbow

Price: 6.44 USD
SKU: 1232
Weight: 0.10 lb(s)
Stock quantity: 0

2982. 5/8" Compression Nut

Price: 2.16 USD
SKU: 5124
Weight: 0.10 lb(s)
Stock quantity: 9

2983. 5/8" Compression Tee

Price: 8.98 USD
SKU: 5370
Weight: 0.10 lb(s)
Stock quantity: 0

2984. 5/8" Compression Union

Price: 5.88 USD
SKU: 3588
Weight: 0.10 lb(s)
Stock quantity: 6

2985. 5/8" Double Expansion Shield Anchor

Price: 3.16 USD
SKU: 1699
Weight: 0.30 lb(s)
Stock quantity: 172

2986. 5/8" Finish Hex Nut Zinc (Box of 25)

Material: SteelFinish: Zinc

Price: 0.31 USD
SKU: 6498
Weight: 1.75 lb(s)
Stock quantity: 525

2987. 5/8" Galvanized Drop-In Anchor

Price: 1.16 USD
SKU: 2237
Weight: 0.30 lb(s)
Stock quantity: 117

2988. 5/8" Galvanized Junior Beam Clamp

Malleable iron with hardened steel cup point set screw and locknutMax. Pipe Size: 8"Max. Rec. Load: 600 lbs.Approvals: Underwriters' Laboratories Listed in the U.S. (UL). Canada (CUL). Complies with Federal Specifications A-A-1192A (Type 19) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 19) which supersedes ANSI/MSS SP-69

Price: 2.87 USD
SKU: 4796
Weight: 0.39 lb(s)
Stock quantity: 0

2989. 5/8" Galvanized Rod Coupling

Material: Carbon steelFinish: Electro-GalvanizedMax. Rec. Load: 2160 lbs.

Price: 1.47 USD
SKU: 1390
Weight: 0.17 lb(s)
Stock quantity: 38

2990. 5/8" Galvanized Round Washer (Box of 100)

Material: Carbon steelFinish: Electro-galvanized

Price: 0.36 USD
SKU: 1455
Weight: 5.56 lb(s)
Stock quantity: 688

2991. 5/8" Galvanized Wide Mouth Beam Clamp

Malleable iron with hardened steel cup point set screw and locknutMax. Pipe Size: 8"Max. Rec. Load: 850 lbs.Approvals: Underwriters' Laboratories Listed in the U.S. (UL). Canada (CUL). Complies with Federal Specifications A-A-1192A (Type 19) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 19) which supersedes ANSI/MSS SP-69

Price: 3.33 USD
SKU: 3788
Weight: 0.74 lb(s)
Stock quantity: 0

2992. 5/8" OD Plastic Escutcheon

Chrome Plated FinishMade of Plastic

Price: 1.20 USD
SKU: 487
Weight: 0.03 lb(s)
Stock quantity: 71

2993. 5/8" PEX 90° Elbow

Price: 1.68 USD
SKU: 3751
Weight: 0.06 lb(s)
Stock quantity: 25

2994. 5/8" PEX Clamp (Box of 50)

Stainless Steel

Price: 0.54 USD
SKU: 3450
Weight: 0.50 lb(s)
Stock quantity: 190

2995. 5/8" PEX Coupling

Price: 1.65 USD
SKU: 4798
Weight: 0.06 lb(s)
Stock quantity: 23

2996. 5/8" PEX Tee

Price: 1.47 USD
SKU: 5970
Weight: 0.06 lb(s)
Stock quantity: 0

2997. 5/8" PEX x 1/2" Female IPS Adapter

Price: 2.77 USD
SKU: 6052
Weight: 0.06 lb(s)
Stock quantity: 0

2998. 5/8" PEX x 1/2" Male IPS Adapter

Price: 2.77 USD
SKU: 6047
Weight: 0.06 lb(s)

2999. 5/8" PEX x 1/2" Sweat Copper Pipe Adapter

Price: 1.89 USD
SKU: 6061
Weight: 0.06 lb(s)
Stock quantity: 0

3000. 5/8" PEX x 3/4" Male IPS Adapter

Price: 2.77 USD
SKU: 4886
Weight: 0.06 lb(s)

3001. 5/8" PEX x 3/4" Male IPS Elbow

Price: 4.48 USD
SKU: 6067
Weight: 0.06 lb(s)
Stock quantity: 25

3002. 5/8" PEX x 3/4" Sweat Copper Fitting Adapter

Price: 1.89 USD
SKU: 3441
Weight: 0.06 lb(s)
Stock quantity: 0

3003. 5/8" PEX x 3/4" Sweat Copper Pipe Adapter

Price: 1.89 USD
SKU: 4741
Weight: 0.06 lb(s)
Stock quantity: 0

3004. 5/8" PEX x 3/4" Sweat Copper Pipe Elbow

Price: 1.73 USD
SKU: 3382
Weight: 0.06 lb(s)
Stock quantity: 0

3005. 5/8" x 2" Galvanized Fender Washer (Box of 100)

Material: Carbon steelFinish: Electro-galvanized

Price: 0.64 USD
SKU: 1031
Weight: 6.06 lb(s)
Stock quantity: 100

3006. 5/8" x 2" Hex Tap Bolt

Price: 0.81 USD
SKU: 2247
Weight: 0.23 lb(s)
Stock quantity: 0

3007. 5/8" x 2-1/2" Hex Tap Bolt

Price: 0.76 USD
SKU: 3133
Weight: 0.27 lb(s)
Stock quantity: 54

3008. 5/8" x 2-3/4" Hex Tap Bolt

Price: 0.85 USD
SKU: 1674
Weight: 0.29 lb(s)
Stock quantity: 0

3009. 5/8" x 3" Hex Tap Bolt

Price: 1.00 USD
SKU: 6536
Weight: 0.38 lb(s)
Stock quantity: 99

3010. 5/8" x 5" Hex Tap Bolt

Price: 1.95 USD
SKU: 2214
Weight: 0.50 lb(s)
Stock quantity: 0

3011. 5/8" x 50' Garden Hose Pro Black

Price: 35.10 USD
SKU: 7943
Weight: 4.00 lb(s)
Stock quantity: 9

3012. 5/8" x 50' Super Duty Garden Hose Gray

Price: 36.57 USD
SKU: 8464
Weight: 4.00 lb(s)
Stock quantity: 12

3013. 5/8" x 6' Galvanized Threaded Rod

Use a metal saw for cutting to suit your project needsFeatures long-lasting durable zinc-plated steel construction

Price: 9.77 USD
SKU: 1895
Weight: 2.50 lb(s)
Stock quantity: 58

3014. 50 gal ProMax® Gas Water Heater

The internal microprocessor provides enhanced operating parameters and tighter differentials for precise sensing and faster heating response to optimize performanceUses a thermopile to generate the power needed to operate the electronic gas control without requiring an external power sourceThe electronic gas control incorporates an LED status indicator that monitors system operation & service diagnosticsDynaclean™ Diffuser Dip Tube helps reduce lime and sediment buildup, maximizes hot water output. Made from long-lasting PEX cross-linked polymerModel: XCV-50

Price: 649.74 USD

SKU: 1877

Weight: 153.00 lb(s)

Stock quantity: 3

3015. 50 gal ProMax® Plus High Recovery Gas Water Heater

Model: XCVX-50

Price: 781.61 USD
SKU: 4829
Weight: 195.00 lb(s)
Stock quantity: 0

3016. 50/50 Solder Wire

50 Sn/50 Pb 3 mm, 0.125", 1 lb 450°F - 464°F melting rangeAcid flux is contained within the core

Price: 15.77 USD
SKU: 2342
Weight: 1.00 lb(s)
Stock quantity: 0

3017. 50-AVR SDS Max Performance Package

Hammer drilling diameter range: 1/2" - 1-9/16" Optimum Hammer drilling range: 5/8" - 1-1/4"Hammer drilling RPM: 360 rpmFull hammering frequency: 3510 impacts/minuteFunctionality: Active Vibration Reduction (AVR), Chiseling, Depth gaugeTriaxial vibration value for hammer drilling into concrete (ah,HD): 9 m/s² 1Dust removal system available: TE DRS-Y, TE DRS-D, TE DRS-BK

Price: 838.60 USD

SKU: 8494

Weight: 13.40 lb(s)

Stock quantity: 0

3018. 528PRO Fill Valve Pro Grade Max Performance

It is fully adjustable to prevent water waste in all toilets. The refill adjuster delivers the right amount of water to the bowl to maintain original performance. This toilet fill valve is easy to install and adjust; no tools are required. Simply remove your old fill valve or ballcock, insert your new Korky fill valve, and adjust. The innovative twist-lock adjustment makes installation easy. Designed to fit more toilets, the Korky toilet fill valve adjusts from 8-1/2 inch to 14 inch and fits Kohler, TOTO, Gerber, American Standard and all other brands. Engineered for strength, the shank and valve components perform as well as brass and are designed to perform better in high pressure homes and properties. The 528PRO includes: (1) 528PRO Fill Valve, (1) Refill Tube, (1) Metal Refill Tube Clip, (1) Mounting Nut, (1) Cone Washer, (1) Coupling Nut, (1) Tamper Proof Key, (1) Refill Adjuster, and (1) Instructions.

Price: 19.56 USD

SKU: 8741

Weight: 1.00 lb(s)

Stock quantity: 11

3019. 6 gal ProLine® Specialty Compact Electric Water Heater

Price: 296.81 USD
SKU: 6117
Weight: 31.00 lb(s)
Stock quantity: 4

3020. 6 Head Sprinkler Cabinet

Each spare head cabinet comes with a hinged door which remains closed to protect the spare sprinklers from the elementsFeatures two holes on the back panel to allow for attachment to most surfaces utilizing the appropriate fastenersNot intended for exposed or harsh environmentsFor 1/2 or 3/4 IN sprinkler head

Price: 17.08 USD
SKU: 3841
Weight: 2.80 lb(s)
Stock quantity: 3

3021. 6 lbs. Pro Dope Pipe Joint Compound

Designed for use with metal threaded pipeUse in pipe systems carrying water, natural gas, air, steam, ammonia, brine, diluted acids and alkalisSuitable for use in temperatures ranging from 0 degrees Fahrenheit to 350 degrees FahrenheitPrevents rust and corrosionWithstands air and steam pressure up to 200 PSIDo not use for LP gas lines or on plastic pipeWipes clean from handsWill not leak or drip out of the containerResists hardening and cracking

Price: 18.18 USD

SKU: 3432

Weight: 6.80 lb(s)

Stock quantity: 4

3022. 6 Zone Expandable Switching Relay w/ Priority (ZSR106)

Compatible with 2, 3 and 4-wire thermostats or other low voltage controllers with switching action120 VAC inputHeavy duty, sealed, fuse protected relay (with spare fuse)1 primary pump output and 3 to 6 (model dependent) zone pump outputs (120 VAC/5 A each)Zone priority selectable with 1-hour time-out featureConvenient R,W,C and T,T,COM dual labeling at thermostat terminalsDHW (ZR/ZC) dry contacts rated for switching line voltageHigh capacity 12 VA or 20 VA transformer (model dependent)Automatic resettable fuse on 24 V circuitSelectable post purgeSelectable pump exercising3 pump ground terminals for simplified wiringExpandable to unlimited number of zones using simple 3-wire connection between controlsLarge screw terminals for ease of wiringFront panel LED indicator light for functional statusETL certified to CSA and UL standards

Price: 285.32 USD

SKU: 6561

Weight: 2.00 lb(s)

Stock quantity: 6

3023. 6" Black Union

Connects 2 black malleable iron gas or oil pipes Meets ASTM and ASME standards

Price: 154.00 USD
SKU: 8225
Weight: 9.50 lb(s)
Stock quantity: 0

3024. 6" Carbide Recip Blades for Thick Metal Cutting (3 Pack)

High performance carbide for greater durability and cutting performance in metals with a thickness from 3/16" to 9/16"Enhanced carbide tip to blade connection for extreme impact resistance1 in. oversized blade body for straighter cuts with less vibration

Price: 34.77 USD
SKU: 8622
Weight: 0.24 lb(s)
Stock quantity: 33

3025. 6" Copper Epoxy Coated Clevis Hanger

Approvals: Complies with Federal Specifications A-A-1192A (Type 1) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 9.67 USD
SKU: 1360
Weight: 2.20 lb(s)
Stock quantity: 8

3026. 6" Copper Epoxy Coated Riser Clamp

Approvals: Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 8) which supersedes ANSI/MSS SP-69

Price: 13.94 USD
SKU: 1363
Weight: 2.68 lb(s)
Stock quantity: 4

3027. 6" Copper Epoxy Coated Strut Clamp

Price: 5.60 USD
SKU: 8565
Weight: 0.94 lb(s)
Stock quantity: 25

3028. 6" Double Check Detector ASSEMBL

Lead FreeMaximum working pressure 175 psiTemperature range 32°F to 140°F

Price: 2013.76 USD
SKU: 4072
Weight: 120.00 lb(s)
Stock quantity: 0

3029. 6" Double Check Detector ASSEMBL (709DCDA)

Maximum working pressure 175 psiTemperature range 33°F to 110°FMaximum flow at low pressure dropRequire no special tools for servicingMeets in AWWA Standard C510

Price: 2240.00 USD
SKU: 3870
Weight: 122.00 lb(s)
Stock quantity: 0

3030. 6" Flexible Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 11.47 USD
SKU: 3510
Weight: 2.22 lb(s)
Stock quantity: 2

3031. 6" Flexible Pipe Cap

Rated for underground Flexes with ground movement Flexible Connectors are leak-proof, rot-proof and sealed against infiltration and exfiltrationConforms to CSA B602, certified and UPC approved

Price: 4.91 USD
SKU: 2505
Weight: 1.25 lb(s)
Stock quantity: 6

3032. 6" Galvanized Clevis Hanger

Pipe Size: 6"Max. Rec. Load: 1940 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 6.19 USD
SKU: 3014
Weight: 2.76 lb(s)
Stock quantity: 24

3033. 6" Galvanized Riser Clamp

This product is not intended for use with hanger rods.Clamp is designed for standard iron pipe O.D. and must be considered when sizing other types of pipingApprovals: Underwriters' Laboratories Listed in the U.S. (UL). Complies with Federal Specification A-A-1192A (Type 8) and Manufacturers’ Standardization Society ANSI/ MSS SP-58 (Type 8) which supersedes ANSI/ MSS SP-69

Price: 9.67 USD

SKU: 1210

Weight: 3.89 lb(s)

Stock quantity: 18

3034. 6" Galvanized Strut Clamp

Price: 3.35 USD
SKU: 2738
Weight: 1.00 lb(s)
Stock quantity: 28

3035. 6" Grooved Butterfly Control Valve

Approvals:UL, ULC, FM Factory installed UL Listed and FM Approved Double Tamper Switch for indoor and outdoor use

Price: 325.50 USD
SKU: 4658
Weight: 38.58 lb(s)
Stock quantity: 1

3036. 6" Grooved Check Valve

For use up to 250 psi working pressure at 70°FFor horizontal and vertical installationLeak-tight sealMeets the ASTM A126 Made of durable cast iron, with a stainless-steel clapper, and E.P.D.M rubber facing

Price: 297.00 USD
SKU: 4825
Weight: 27.00 lb(s)

3037. 6" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 15.15 USD
SKU: 1060
Weight: 5.80 lb(s)
Stock quantity: 16

3038. 6" Grooved Split Flange

Made of durable, high-strength ductile iron comforming to ASTM A536

Price: 58.45 USD
SKU: 3608
Weight: 9.50 lb(s)
Stock quantity: 3

3039. 6" Grooved Spring Load Check Valve

Lead-free*Grooved end connectionsMay be installed in horizontal positions (or vertical with flow moving up).Maximum working temperature 180°FNSF/ANSI 61 and NSF/ANSI 372

Price: 962.23 USD
SKU: 8279
Weight: 18.00 lb(s)

3040. 6" Husky Coupling (4000 Series)

Extra width for lateral supportAdditional sealing clamps for better load distribution and a more positive seal304 stainless steel heavy duty construction. Shield color coated orangeMeets ASTM C-1540 standard specification for Heavy Duty shielded couplings

Price: 28.45 USD
SKU: 4233
Weight: 1.90 lb(s)
Stock quantity: 11

3041. 6" IPS x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 14.75 USD
SKU: 4100
Weight: 1.00 lb(s)
Stock quantity: -5

3042. 6" IPS x 1-1/2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 20.48 USD
SKU: 2416
Weight: 1.00 lb(s)
Stock quantity: 0

3043. 6" IPS x 2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 30.53 USD
SKU: 721
Weight: 1.00 lb(s)
Stock quantity: 3

3044. 6" Metal Cutting Reciprocating Saw Blade (14 TPI)

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durabilityPatented T2™ Technology reduces cutting forces on each tooth and optimizes chip removal to allow efficient cutting in the widest range of materialsPatented metal cutting TPIs provide faster and more efficient cutting in the widest widest variety of materials including Unistrut, angle iron, black pipe and more

Price: 2.41 USD

SKU: 4059

Weight: 0.50 lb(s)

Stock quantity: 6

3045. 6" Metal Cutting Reciprocating Saw Blade (18 TPI)

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durabilityPatented T2™ Technology reduces cutting forces on each tooth and optimizes chip removal to allow efficient cutting in the widest range of materialsPatented metal cutting TPIs provide faster and more efficient cutting in the widest widest variety of materials including Unistrut, angle iron, black pipe and more

Price: 2.99 USD
SKU: 4771
Weight: 0.05 lb(s)
Stock quantity: 742

3046. 6" Metal Cutting Reciprocating Saw Blade (24 TPI)

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durabilityPatented T2™ Technology reduces cutting forces on each tooth and optimizes chip removal to allow efficient cutting in the widest range of materialsPatented metal cutting TPIs provide faster and more efficient cutting in the widest widest variety of materials including Unistrut, angle iron, black pipe and more

Price: 2.46 USD
SKU: 4779
Weight: 0.05 lb(s)
Stock quantity: 0

3047. 6" No Hub Cast Iron 1/16 Bend

Cast-iron constructionMinimum service temperature 32°F and Maximum 212°FIAPMO certified and NSF listed Excellent sound-deadening qualitiesWithout a hubNot intended for pressure use

Price: 25.65 USD
SKU: 7876
Weight: 6.73 lb(s)
Stock quantity: 2

3048. 6" No Hub Cast Iron 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 35.24 USD
SKU: 8226
Weight: 15.00 lb(s)
Stock quantity: 8

3049. 6" No Hub Cast Iron 1/8 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 23.69 USD
SKU: 8227
Weight: 9.10 lb(s)
Stock quantity: 11

3050. 6" No Hub Cast Iron Blind Cap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 15.47 USD
SKU: 7928
Weight: 3.20 lb(s)
Stock quantity: 6

3051. 6" No Hub Cast Iron Cleanout Ferrule with Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 52.35 USD
SKU: 8245
Weight: 9.36 lb(s)
Stock quantity: 3

3052. 6" No Hub Cast Iron Cleanout Tee With Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 125.09 USD
SKU: 7912
Weight: 23.90 lb(s)
Stock quantity: 0

3053. 6" No Hub Cast Iron Double Sanitary Tee

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 102.33 USD
SKU: 7909
Weight: 21.02 lb(s)
Stock quantity: 0

3054. 6" No Hub Cast Iron Double Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 94.61 USD
SKU: 7934
Weight: 27.37 lb(s)
Stock quantity: 0

3055. 6" No Hub Cast Iron Long Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 65.58 USD
SKU: 7881
Weight: 23.30 lb(s)
Stock quantity: 0

3056. 6" No Hub Cast Iron P-Trap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 96.84 USD
SKU: 7931
Weight: 33.60 lb(s)
Stock quantity: 0

3057. 6" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 54.18 USD
SKU: 7901
Weight: 12.92 lb(s)
Stock quantity: 4

3058. 6" No Hub Cast Iron Short Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 42.00 USD
SKU: 7878
Weight: 17.10 lb(s)
Stock quantity: 1

3059. 6" No Hub Cast Iron Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 55.95 USD
SKU: 7887
Weight: 19.67 lb(s)
Stock quantity: 1

3060. 6" No Hub Heavy Duty Coupling

Standard couplings shall conform to the requirements contained in the latest edition of ASTM C1540Shield assembly, clamp, band, and screw housing shall be made from series 301 stainless steel, and the screw made from series 304 stainless steelGaskets shall comply with requirements contained in the latest edition of ASTM C564

Price: 14.33 USD
SKU: 3280
Weight: 1.50 lb(s)
Stock quantity: 19

3061. 6" No-Hub Coupling

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certifiedCouplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310Neoprene rubber gasket meets/exceeds ASTM C 564Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 7.80 USD

SKU: 713

Weight: 1.00 lb(s)

Stock quantity: 28

3062. 6" OS&Y Flanged Valve (200)

Maximum working pressure: 200 psi

Price: 545.52 USD
SKU: 3769
Weight: 50.00 lb(s)
Stock quantity: 1

3063. 6" PVC DWV 90° Elbow

Maximum service temperature 140°FDo not test or use with compressed air or other gasesASTM D2665 and D3311NSF/ANSI Standard 14UL Listed 94V-0NSF U.P. Certified

Price: 0.00 USD
SKU:

3064. 6" Shielded Transition Coupling (Cast Iron to PVC, Steel, Extra Heavy Cast Iron)

Corrosion-resistant 300 Series stainless steel componentMaximum working pressure of 4.3 psi Neoprene rubber sleeve conforms to ASTM C 564Certified to ASTM C-1460, CSA B602

Price: 19.00 USD
SKU: 2366
Weight: 1.44 lb(s)
Stock quantity: 13

3065. 6" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 1000 lbs.Pipe Size: 6"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69

Price: 2.13 USD
SKU: 2027
Weight: 0.58 lb(s)
Stock quantity: 15

3066. 6" Standard Grooved 45° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 35.20 USD
SKU: 1217
Weight: 12.50 lb(s)
Stock quantity: 5

3067. 6" Standard Grooved 90° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 35.22 USD
SKU: 275
Weight: 16.50 lb(s)
Stock quantity: 2

3068. 6" Standard Grooved Cap

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 16.03 USD
SKU: 4085
Weight: 1.68 lb(s)
Stock quantity: 3

3069. 6" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 48.91 USD
SKU: 286
Weight: 24.00 lb(s)
Stock quantity: 4

3070. 6" Sweat Brass Flange

Price: 257.47 USD
SKU: 4413
Weight: 22.30 lb(s)
Stock quantity: 2

3071. 6" Test Plug

Large wing nut for easy operationGalvanized steel flange with molded rubber gasket

Price: 14.08 USD
SKU: 2350
Weight: 1.40 lb(s)
Stock quantity: 2

3072. 6" Waterflow Alarm Switch with Retard

NEMA 4/IP54 Rated Enclosure suitable for indoor or outdoor use with factory installed gasket and die-cast housing when used with appropriate conduit fittingTemperature Range: 40°F - 120°FNon-corrosive sleeve factory installed in saddle

Price: 127.71 USD
SKU: 4518
Weight: 6.70 lb(s)
Stock quantity: 1

3073. 6" Wood Bi-Metal Reciprocating Saw Blade

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durabilityPatented T2™ Technology reduces cutting force on each tooth and optimizes chip removal to allow efficient cutting in the widest range of materialsPatented design for ultimate durability and speed when cutting clean wood or nail-embedded wood

Price: 2.57 USD
SKU: 4477
Weight: 0.05 lb(s)
Stock quantity: 0

3074. 6" x 1" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 28.81 USD
SKU: 6266
Weight: 7.70 lb(s)
Stock quantity: 1

3075. 6" x 10' SCH 10 Black Pipe GG

Price: 110.03 USD
SKU: 3116
Stock quantity: 9

3076. 6" x 10' SCH 40 PVC DWV Pipe

Price: 47.82 USD
SKU: 1018
Stock quantity: 5

3077. 6" x 10' Type L Copper Pipe

Meets in ANSI/NSF Standard 61 for use in drinking water suppliesMeets ASTM standardsWall Thickness: 0.140"

Price: 806.78 USD
SKU: 2518
Weight: 102.00 lb(s)
Stock quantity: 0

3078. 6" x 10" No Hub Cast Iron Pipe

Cast-iron construction 212° F maximum working temperature For non-pressure applications Noncombustible and offers superior sound-deadening performance Conform to ASTM A 888 and CISPI Standard 301

Price: 147.53 USD
SKU: 7921
Weight: 117.80 lb(s)
Stock quantity: 6

3079. 6" x 10.6' SCH 40 Black Pipe

Price: 254.91 USD
SKU: 456
Stock quantity: 0

3080. 6" x 1-1/2" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 21.58 USD
SKU: 4092
Weight: 7.90 lb(s)
Stock quantity: 2

3081. 6" x 1-1/4" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 28.81 USD
SKU: 6270
Weight: 7.70 lb(s)
Stock quantity: 3

3082. 6" x 2" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 24.81 USD
SKU: 3294
Weight: 8.20 lb(s)
Stock quantity: 5

3083. 6" x 2" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 19.92 USD
SKU: 1032
Weight: 3.80 lb(s)
Stock quantity: 0

3084. 6" x 2" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 39.26 USD
SKU: 7897
Weight: 9.88 lb(s)
Stock quantity: 4

3085. 6" x 2" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 26.08 USD
SKU: 7916
Weight: 4.04 lb(s)
Stock quantity: 0

3086. 6" x 2" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 34.34 USD
SKU: 7884
Weight: 9.77 lb(s)
Stock quantity: 1

3087. 6" x 2-1/2" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 27.09 USD
SKU: 298
Weight: 8.30 lb(s)
Stock quantity: 2

3088. 6" x 2-1/2" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 22.19 USD
SKU: 1040
Weight: 3.80 lb(s)
Stock quantity: 1

3089. 6" x 2-1/2" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 56.95 USD
SKU: 6124
Weight: 17.40 lb(s)
Stock quantity: 0

3090. 6" x 24' Flue Pipe

Price: 5.15 USD
SKU: 2746
Stock quantity: 36

3091. 6" x 3" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 24.59 USD
SKU: 4408
Weight: 8.80 lb(s)
Stock quantity: 0

3092. 6" x 3" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 20.15 USD
SKU: 1047
Weight: 3.80 lb(s)
Stock quantity: 1

3093. 6" x 3" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 32.15 USD
SKU: 7898
Weight: 11.45 lb(s)
Stock quantity: 2

3094. 6" x 3" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 21.17 USD
SKU: 7917
Weight: 3.69 lb(s)
Stock quantity: 0

3095. 6" x 3" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 45.05 USD
SKU: 7885
Weight: 12.52 lb(s)
Stock quantity: 3

3096. 6" x 3" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 13.41 USD
SKU: 3497
Weight: 0.80 lb(s)
Stock quantity: 0

3097. 6" x 3" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 48.79 USD
SKU: 4099
Weight: 17.70 lb(s)
Stock quantity: 3

3098. 6" x 4" Grooved Mechanical Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 30.27 USD
SKU: 3295
Weight: 12.80 lb(s)
Stock quantity: 0

3099. 6" x 4" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 17.60 USD
SKU: 1054
Weight: 3.80 lb(s)
Stock quantity: 3

3100. 6" x 4" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 27.39 USD
SKU: 419
Weight: 7.40 lb(s)
Stock quantity: 0

3101. 6" x 4" No Hub Cast Iron Double Sanitary Tee

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 69.97 USD
SKU: 7908
Weight: 14.02 lb(s)
Stock quantity: 0

3102. 6" x 4" No Hub Cast Iron Double Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 76.44 USD
SKU: 7933
Weight: 16.37 lb(s)
Stock quantity: 0

3103. 6" x 4" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 41.07 USD
SKU: 7899
Weight: 11.97 lb(s)
Stock quantity: 5

3104. 6" x 4" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 18.92 USD
SKU: 7918
Weight: 4.10 lb(s)
Stock quantity: -1

3105. 6" x 4" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 44.61 USD
SKU: 7886
Weight: 14.64 lb(s)
Stock quantity: 7

3106. 6" x 4" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 13.51 USD
SKU: 2686
Weight: 2.08 lb(s)
Stock quantity: 2

3107. 6" x 4" SCH 40 Black Nipple

Rated at maximum 230 psi at 400°FSteel constructionASTM standardsHydrostatically testedNot for underground use

Price: 31.20 USD
SKU: 8224
Weight: 6.31 lb(s)
Stock quantity: 4

3108. 6" x 4" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 46.20 USD
SKU: 923
Weight: 18.80 lb(s)
Stock quantity: 3

3109. 6" x 5" Grooved Reducer

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 25.66 USD
SKU: 1236
Weight: 3.80 lb(s)
Stock quantity: 2

3110. 6" x 5" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 59.00 USD
SKU: 7900
Weight: 15.62 lb(s)
Stock quantity: 2

3111. 6" x 5" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 21.18 USD
SKU: 7919
Weight: 4.34 lb(s)
Stock quantity: 4

3112. 6" x 5" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 54.17 USD
SKU: 7926
Weight: 17.55 lb(s)
Stock quantity: 1

3113. 6" x 5" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 13.51 USD
SKU: 4066
Weight: 2.50 lb(s)
Stock quantity: 0

3114. 60 psi Pressure Gauge

Price: 5.04 USD
SKU: 5730
Weight: 0.26 lb(s)
Stock quantity: 4

3115. 600 psi Pressure Gauge

Price: 5.10 USD
SKU: 4116
Weight: 0.24 lb(s)
Stock quantity: 1

3116. 64 oz. Glug Liquid Drain Opener (kitchen)

Attacks kitchen clogs caused by buildup of fats, grease and foodstuffsAttacks bath clogs caused by hair and soap products

Price: 12.90 USD
SKU: 6461
Weight: 5.60 lb(s)
Stock quantity: 0

3117. 7 Day Programmable Thermostat (Model PSPA711)

Autochangeover Fully Programmable IAQ Clean Cycle « Intermittent Fan Programmable Auto Changeover Dead-Band (1F to 6F)7 Day Programming - 4 Periods Per Day Easy Programming with Lux Speed Dial Dual Power - System or Battery Powered with Battery Free Memory Storage Programmable Filter Timer with Change Filter Indicator Temporary Override is CAT24 Compliant Adjustable 2 or 5 Minute A/C Compressor Delay Mode and Fan Slide Switch Optional Early Recovery Energy Star Compliant Batteries Included

Price: 66.47 USD
SKU: 4972
Weight: 1.00 lb(s)
Stock quantity: 4

3118. 7" x 24' Flue Pipe

Price: 5.62 USD
SKU: 2745
Stock quantity: 0

3119. 7/8" Galvanized Rod Coupling

Material: Carbon steelFinish: Electro-GalvanizedMax. Rec. Load: 4480 lbs.

Price: 6.63 USD
SKU: 1076
Weight: 0.56 lb(s)
Stock quantity: 0

3120. 7/8" Bi-Metal Speed Slot Hole Saw with T3 Technology

Increased wall thickness improves durability and minimizes tooth loss Optimized tooth design penetrates metal with ease Larger, sharper teeth remove more wood for fast cutting SPEED SLOT staircase design for fast, easy plug ejection

Price: 7.09 USD
SKU: 3123
Weight: 0.19 lb(s)
Stock quantity: 8

3121. 7/8" Finish Hex Nut Zinc (Box of 15)

Material: SteelFinish: Zinc

Price: 1.05 USD
SKU: 2114
Weight: 2.85 lb(s)
Stock quantity: 0

3122. 7/8" x 12" SDS-Plus Carbide Drill Bit

Price: 39.01 USD
SKU: 6350
Weight: 0.94 lb(s)
Stock quantity: 1

3123. 7/8" x 4" Hex Tap Bolt

Price: 1.48 USD
SKU: 1704
Weight: 0.85 lb(s)
Stock quantity: 0

3124. 7/8" x 8" SDS-Plus Carbide Drill Bit

Price: 35.53 USD
SKU: 6346
Weight: 0.80 lb(s)
Stock quantity: 0

3125. 72" Rubber Washing Machine Hose

For high pressure applicationFemale x Female hose threadsAnti-corrosive couplingMeets IAPMO, CSA, ANSI, IEC 61770, and RMA standards

Price: 9.41 USD
SKU: 1959
Weight: 0.88 lb(s)
Stock quantity: 9

3126. 72" Stainless Steel Braided Washing Machine Hose

Female x Female hose threadsWorking temperature 15°F to 158°F Ctome Plated brass nut, stainless steel ferrule

Price: 8.82 USD
SKU: 1922
Weight: 0.84 lb(s)
Stock quantity: 1

3127. 74 gal Plus High Recovery Gas Water Heater

Meets UBC, CEC, SBCC, HUD and BOCA National CodesMeets the thermal efficiency and standby loss requirements of the U.S.Department of Energy and current edition of ASHRAE/IESNA 90.1Meets the Federal Energy Efficiency Standards effective January 20, 2004, according to the National Appliance Energy Conservation Act (NAECA) of 1992Model: PCG-75

Price: 1012.60 USD
SKU: 1855
Weight: 270.00 lb(s)
Stock quantity: 2

3128. 8 oz. 1-Step PVC Cement (Blue)

Fast Set, One-Step CementNo Primer RequiredSuitable for All Weather ConditionsEffective on Wet or Dry PipeUse in Hot or Cold TemperaturesGreat for Flexible PVC PipeAllows for Immediate Pressure TestingEco-Friendly - Low VOC

Price: 6.80 USD
SKU: 8829
Weight: 0.80 lb(s)
Stock quantity: 0

3129. 8 oz. Block

Sets up quickly and dries to form a very tough, yet flexible seal which will not harden, crack, crumble or shrinkFor use on all metals, including galvanized steel, black iron, aluminum, copper, brass, stainless steel, and on PVC, ABS, and CPVC plasticsProvides leak-proof resistance to high pressure, temperature, expansion, contraction and extreme vibration. Grit-free; non-separating, distinctive non-runny consistency

Price: 13.87 USD

SKU: 4437

Weight: 0.60 lb(s)

Stock quantity: 7

3130. 8 oz. Heavy-Duty Industrial Grade Thread Sealant with PTFE

#76003

Price: 10.95 USD
SKU: 8835
Weight: 1.00 lb(s)
Stock quantity: 0

3131. 8 oz. Megaloc Multi-Purpose Thread Sealant

Odorless formula is non-separating, non-flammable and non-hazardousSeals plastic and metal pipes and fittingsPerforms over a range from -50°F to 400°FSafe for drinking water linesIn-lid applicatorSets soft with no cure time requiredWipes clean from hands and tools and washes out of clothesResists hardening and cracksHydraulic resistant to 12,000 PSI

Price: 13.67 USD

SKU: 3308

Weight: 0.70 lb(s)

Stock quantity: 7

3132. 8 oz. Pipe Joint & Gasket Sealant

Non-separating, and will not harden or shrinkPerforms over a temperature range of minus 90 degrees to 450 degrees Fahrenheit (on steel pipe), 12,000 PSI (hydraulic) and 2600 PSI (gas)Safe for drinking water linesBrushableApplicator in lid

Price: 10.08 USD
SKU: 2353
Weight: 0.80 lb(s)
Stock quantity: 16

3133. 8 oz. Pro Dope Pipe Joint Compound

Designed for use with metal threaded pipeUse in pipe systems carrying water, natural gas, air, steam, ammonia, brine, diluted acids and alkalisSuitable for use in temperatures ranging from 0 degrees Fahrenheit to 350 degrees FahrenheitPrevents rust and corrosionWithstands air and steam pressure up to 200 PSIDo not use for LP gas lines or on plastic pipeWipes clean from handsWill not leak or drip out of the containerResists hardening and cracking

Price: 5.15 USD
SKU: 1791
Weight: 0.84 lb(s)
Stock quantity: 40

3134. 8 oz. PVC Cement Medium Body, Medium Set (Clear)

For PVC Types, potable water, DWV, and SW pipe and fittings up to 6" diameterSchedules 40 and 80Meets ASTM D2564

Price: 6.00 USD
SKU: 6480
Weight: 0.60 lb(s)
Stock quantity: 16

3135. 8 oz. PVC Primer (Clear)

Recommended method to soften and prepare surface of PVC pipe and fittings before applying solvent cements Meets ASTM F656

Price: 5.19 USD
SKU: 6613
Weight: 0.60 lb(s)
Stock quantity: 19

3136. 8 oz. Real-Tuff PTFE Paste Thread Sealant

Formula is non-flammable and contains no heavy metals or volatile solventsUse on all metals and on PVC, ABS, and CPVC plasticsSafe for drinking-water linesSuitable for use with all liquids and gases except for oxygenMaximum working hydraulic pressure of 12,000 PSIResists strong acids, alkalis and ketonesWithstands temperatures from -200 degrees Fahrenheit to 500 degrees FahrenheitHolds tight against expansion and contractionForms leak-free joints that can be used immediately

Price: 13.07 USD

SKU: 1794

Weight: 0.88 lb(s)

Stock quantity: 53

3137. 8 oz. Spray Lubricant with Smart Straw WD-40

Loosens rusted parts, eliminates moisture and stops squeaksOil-based formula Straw allows for precision stream or regular spray action to fit the job Sprays on clear

Price: 6.89 USD
SKU: 1822
Weight: 0.74 lb(s)
Stock quantity: 24

3138. 8" Fire Alarm Bell 120VAC

Listed for indoor and outdoor use Outdoor use requires BBK-1 or HC-BB weatherproof back box Indoor use mounts directly to standard 4” box Low current draw High dB output AC and DC models DC models are motor driven, polarized, and have built in transient protection for supervised alarm circuiModel 1808120

Price: 54.15 USD
SKU: 10243
Weight: 3.00 lb(s)
Stock quantity: 2

3139. 8" Flexible Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 21.20 USD
SKU: 3086
Weight: 2.60 lb(s)
Stock quantity: 1

3140. 8" Flexible Pipe Cap

Rated for undergroundFlexes with ground movement Flexible Connectors are leak-proof, rot-proof and sealed against infiltration and exfiltrationConforms to CSA B602, certified and UPC approved

Price: 14.25 USD
SKU: 3598
Weight: 1.60 lb(s)
Stock quantity: 0

3141. 8" Galvanized Clevis Hanger

Pipe Size: 8"Max. Rec. Load: 2000 lbs.Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved. Complies with Federal Specification A-A-1192A (Type 1) and Manufacturers’ Standardization Society ANSI/MSS SP-58 (Type 1) which supersedes ANSI/MSS SP-69

Price: 10.36 USD

SKU: 3833

Weight: 4.35 lb(s)

Stock quantity: 6

3142. 8" Galvanized Strut Clamp

Price: 3.46 USD
SKU: 4764
Weight: 1.14 lb(s)
Stock quantity: 24

3143. 8" Grooved Rigid Coupling

Provides joint rigidity, for the support and hanging requirements of ANSI B31.1 Power Pipin Code ANSI B31.9 Building Service Pipe Code amd NFPA 13 Sprinkler systems.EPDM Gasket Tempetature: 230° F

Price: 21.42 USD
SKU: 895
Weight: 10.80 lb(s)
Stock quantity: 0

3144. 8" Grooved Split Flange

Made of durable, high-strength ductile iron comforming to ASTM A536

Price: 73.92 USD
SKU: 4240
Weight: 15.60 lb(s)
Stock quantity: 2

3145. 8" Husky Coupling (4000 Series)

Extra width for lateral supportAdditional sealing clamps for better load distribution and a more positive seal304 stainless steel heavy duty construction. Shield color coated orangeMeets ASTM C-1540 standard specification for Heavy Duty shielded couplings

Price: 56.11 USD
SKU: 4239
Weight: 2.30 lb(s)
Stock quantity: 0

3146. 8" IPS x 1" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 21.03 USD
SKU: 4107
Weight: 1.00 lb(s)
Stock quantity: 0

3147. 8" IPS x 2" Wall Thickness x 3 ft. Length Pipe Insulation

Material: FiberglassStandards: ASTM C547 Type 1, ASTM C585, ASTM C1136, NRC 1.36, ASTM C795, Mil-I-24244C, MEA Compliant

Price: 37.70 USD
SKU: 988
Weight: 1.00 lb(s)
Stock quantity: 0

3148. 8" No Hub Cast Iron 1/16 Bend

Cast-iron constructionMinimum service temperature 32°F and Maximum 212°FIAPMO certified and NSF listed Excellent sound-deadening qualitiesWithout a hubNot intended for pressure use

Price: 40.77 USD
SKU: 7877
Weight: 11.99 lb(s)
Stock quantity: 0

3149. 8" No Hub Cast Iron Blind Cap

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 41.16 USD
SKU: 7929
Weight: 6.50 lb(s)
Stock quantity: 2

3150. 8" No Hub Cast Iron Cleanout Tee With Plug

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 238.67 USD
SKU: 7913
Weight: 35.91 lb(s)
Stock quantity: 0

3151. 8" No Hub Cast Iron Double Sanitary Tee

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 236.33 USD
SKU: 7911
Weight: 38.80 lb(s)
Stock quantity: 0

3152. 8" No Hub Cast Iron Double Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 269.84 USD
SKU: 7935
Weight: 45.34 lb(s)
Stock quantity: 0

3153. 8" No Hub Cast Iron Sanitary Tee

Price: 219.60 USD
SKU: 7906
Weight: 30.84 lb(s)
Stock quantity: 0

3154. 8" No Hub Cast Iron Short Sweep 1/4 Bend

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 108.73 USD
SKU: 7879
Weight: 31.00 lb(s)
Stock quantity: 0

3155. 8" No Hub Cast Iron Wye

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 131.56 USD
SKU: 7892
Weight: 36.33 lb(s)
Stock quantity: 0

3156. 8" No Hub Heavy Duty Coupling

Standard couplings shall conform to the requirements contained in the latest edition of ASTM C1540Shield assembly, clamp, band, and screw housing shall be made from series 301 stainless steel, and the screw made from series 304 stainless steelGaskets shall comply with requirements contained in the latest edition of ASTM C564

Price: 15.96 USD
SKU: 845
Weight: 2.00 lb(s)
Stock quantity: 8

3157. 8" No-Hub Couplings

No-Hub couplings consist of a stainless steel shield, clamp assembly and a neoprene gasket. The stainless steel shield and clamp assemblies are corrosion resistantNSF certifiedCouplings meet/exceed material and performance requirements of ASTM C1277 and CISPI 310Neoprene rubber gasket meets/exceeds ASTM C 564Stainless steel clamps, bands, and shields meet/exceeds ASTM A 240

Price: 15.00 USD
SKU: 8602
Weight: 1.60 lb(s)
Stock quantity: 8

3158. 8" PVC DWV 90° Elbow

Price: 0.00 USD
SKU:

3159. 8" Sprinkler Hanger NFPA

Material: Carbon steelFinish: Pre-galvanizedMax. Rec. Load: 1000 lbs.Pipe Size: 8"Approvals: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69

Price: 2.38 USD

SKU: 2123

Weight: 0.90 lb(s)

Stock quantity: 0

3160. 8" Standard Grooved 45° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 62.15 USD
SKU: 4266
Weight: 21.80 lb(s)
Stock quantity: 0

3161. 8" Standard Grooved 90° Elbow

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 57.53 USD
SKU: 907
Weight: 33.10 lb(s)
Stock quantity: 4

3162. 8" Standard Grooved Cap

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 26.00 USD
SKU: 1053
Weight: 3.51 lb(s)
Stock quantity: 0

3163. 8" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 92.38 USD
SKU: 3795
Weight: 51.80 lb(s)
Stock quantity: 0

3164. 8" x 10' SCH 40 Black Pipe PP

Price: 248.00 USD
SKU: 1094
Stock quantity: 0

3165. 8" x 10" No Hub Cast Iron Pipe

Cast-iron construction 212° F maximum working temperature For non-pressure applications Noncombustible and offers superior sound-deadening performance Conform to ASTM A 888 and CISPI Standard 301

Price: 229.66 USD
SKU: 7922
Weight: 170.90 lb(s)
Stock quantity: 0

3166. 8" x 2" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 29.46 USD
SKU: 8620
Weight: 7.00 lb(s)
Stock quantity: 0

3167. 8" x 24' Flue Pipe

Price: 7.45 USD
SKU: 2744
Stock quantity: 18

3168. 8" x 3" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 112.83 USD
SKU: 7902
Weight: 17.87 lb(s)
Stock quantity: 0

3169. 8" x 3" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 69.97 USD
SKU: 7888
Weight: 17.53 lb(s)
Stock quantity: 0

3170. 8" x 4" No Hub Cast Iron Double Sanitary Tee

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 163.92 USD
SKU: 7910
Weight: 21.96 lb(s)
Stock quantity: 0

3171. 8" x 4" No Hub Cast Iron Double Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 130.65 USD
SKU: 7936
Weight: 23.00 lb(s)
Stock quantity: 0

3172. 8" x 4" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 115.83 USD
SKU: 7903
Weight: 21.58 lb(s)
Stock quantity: 0

3173. 8" x 4" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 76.81 USD
SKU: 7889
Weight: 21.95 lb(s)
Stock quantity: 0

3174. 8" x 4" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 39.74 USD
SKU: 3952
Weight: 3.00 lb(s)
Stock quantity: 0

3175. 8" x 5" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 130.65 USD
SKU: 7904
Weight: 22.66 lb(s)
Stock quantity: 0

3176. 8" x 5" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 92.83 USD
SKU: 7890
Weight: 23.94 lb(s)
Stock quantity: 1

3177. 8" x 6" No Hub Cast Iron Double Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 183.63 USD
SKU: 7937
Weight: 31.33 lb(s)
Stock quantity: 0

3178. 8" x 6" No Hub Cast Iron Sanitary Tee

Cast-iron constructionExcellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 126.63 USD
SKU: 7905
Weight: 24.03 lb(s)
Stock quantity: 0

3179. 8" x 6" No Hub Cast Iron Short Reducer

Cast-iron constructionExcellent sound-deadening qualitiesWithout a hubMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 35.49 USD
SKU: 8292
Weight: 8.01 lb(s)
Stock quantity: 0

3180. 8" x 6" No Hub Cast Iron Wye

Excellent sound-deadening qualitiesMinimum service temperature 32°F and Maximum 212°FNot intended for pressure useIAPMO certified and NSF listed

Price: 81.67 USD
SKU: 7891
Weight: 28.27 lb(s)
Stock quantity: 0

3181. 8" x 6" Reducing Coupling

Rated for underground useFlexes with ground movement Maximum working pressure of 4.3 psi Band slots that offer great flexibility and help seal against infiltration and exfiltrationConforms to ASTM D 5926, C1173 and CSA B618

Price: 33.44 USD
SKU: 4414
Weight: 3.40 lb(s)
Stock quantity: 0

3182. 8" x 6" Standard Grooved Tee

Pressure rating of fitting tested to an operating pressure of 500 psiMade of durable, high-strength ductile iron comforming to ASTM A536

Price: 92.38 USD
SKU: 4105
Weight: 35.00 lb(s)
Stock quantity: 0

3183. 80,000 BTU Mascot FT Wall Mounted Heating Only Boiler

Model MFTHW080NA1XNNatural Gas & Propane Models95% Efficient (AFUE)Up to 10:1 ModulationVent up to 100 ft in PVC, CPVC & PolypropyleneEnvironmentally FriendlyLow NOx EmissionsIntegrated DHW Indirect TankSuperior DHW Performance on Combi Models

Price: 1920.00 USD

SKU: 8697

Weight: 98.00 lb(s)

Stock quantity: 0

3184. 9 oz. Soldering Paste

Smooth, premium quality, petroleum-based fluxFormulated for use in extreme climate temperatures all year longSelf-cleaning, lead-free formulaWill not lose its consistency in high or low temperaturesMeets Commercial Item Description A-A-51145 (supersedes Fed Spec O-F-506)

Price: 8.45 USD
SKU: 2375
Weight: 0.70 lb(s)
Stock quantity: 19

3185. 9" Carbide Recip Blades for Thick Metal Cutting (3 Pack)

High performance carbide for greater durability and cutting performance in metals with a thickness from 3/16" to 9/16"Enhanced carbide tip to blade connection for extreme impact resistance1 in. oversized blade body for straighter cuts with less vibration

Price: 16.25 USD
SKU: 8623
Weight: 0.36 lb(s)
Stock quantity: 302

3186. 9" Wood Bi-Metal Reciprocating Saw Blade

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durabilityPatented T2™ Technology reduces cutting force on each tooth and optimizes chip removal to allow efficient cutting in the widest range of materialsPatented design for ultimate durability and speed when cutting clean wood or nail-embedded wood

Price: 3.78 USD
SKU: 4491
Weight: 0.06 lb(s)
Stock quantity: 180

3187. 9.8 oz. Hybrifix Super 7 Adhesive Sealant (Clear)

Universal bonding and sealing for interior and exterior usePermanently elasticFree of isocyanates, solvents and siliconesNo shrinkage and bubble freeResistant to UV, moisture, mould and weatherAdheres perfectly without primer on most, even damp, surfacesNeutral curing, almost odourlessNon corrosive towards metalsHigh mechanical resistance, end strength and E-modulusAbsorbs acoustic and mechanical vibrations

Price: 9.08 USD

SKU: 7528

Weight: 0.80 lb(s)

Stock quantity: 37

3188. 9.8 oz. Hybrifix Super 7 Adhesive Sealant (White)

Universal bonding and sealing for interior and exterior usePermanently elasticFree of isocyanates, solvents and siliconesNo shrinkage and bubble freeResistant to UV, moisture, mould and weatherAdheres perfectly without primer on most, even damp, surfacesNeutral curing, almost odourlessNon corrosive towards metalsHigh mechanical resistance, end strength and E-modulusAbsorbs acoustic and mechanical vibrations

Price: 8.58 USD

SKU: 7524

Weight: 1.10 lb(s)

Stock quantity: 60

3189. 95/5 Lead Free Solder Wire

Lead-free alloy of 95% tin and 5% antimony3 mm, 0.125", 1lb.450°F - 464°F melting range

Price: 22.92 USD
SKU: 1814
Weight: 1.00 lb(s)
Stock quantity: 226

3190. A-11, 7/16" Standard Tip for Air Acetylene Torch

Gas flow: 11 @ 14 PSI SCFHSoft solder: 1-1/2"-3"Silver braze: 7/8"-1-5/8"

Price: 81.03 USD
SKU: 2319
Stock quantity: 1

3191. A-14, 1/2" Standard Tip for Air Acetylene Torch

Soft solder: 2"-3-1/2"Silver braze: 1"-2"

Price: 99.89 USD
SKU: 1893
Weight: 1.00 lb(s)
Stock quantity: 0

3192. A-2, 1/8" Standard Tip for Air Acetylene Torch

Gas flow: 2 @ 14 PSI SCFHSoft solder: 1/8"-1/2"Silver braze: 1/8"-1/4"

Price: 54.65 USD
SKU: 1985
Weight: 0.40 lb(s)
Stock quantity: 3

3193. A-3, 3/16" Standard Tip for Air Acetylene Torch

Gas flow: 3.6 @ 14 PSI SCFHSoft solder: 1/4"-1"Silver braze: 1/8"-1/2"

Price: 59.24 USD
SKU: 3815
Weight: 0.50 lb(s)
Stock quantity: 2

3194. A-32, 3/4" Standard Tip for Air Acetylene Torch

Soft solder: 4"-6"Silver braze: 1-1/2"-4"

Price: 142.49 USD
SKU: 1902
Weight: 1.00 lb(s)
Stock quantity: 0

3195. A-5, 1/4" Standard Tip for Air Acetylene Torch

Gas flow: 5.7 @ 14 PSI SCFHSoft solder: 3/4"-1-1/2"Silver braze: 1/4"-3/4"

Price: 69.85 USD
SKU: 3521
Weight: 0.50 lb(s)
Stock quantity: 4

3196. A-8, 5/16" Standard Tip for Air Acetylene Torch

Soft solder: 1"-2"Silver braze: 1/2"-1"

Price: 76.84 USD
SKU: 1924
Weight: 0.50 lb(s)
Stock quantity: 2

3197. Afwall Millennium 1.1-1.6 gpf Top Spud Elongated Bowl

Wall-mounted flushometer valve toiletVitreous chinaConventional glazeHigh Efficiency, Low Consumption. Operates in the range of 1.1 gpf to 1.6 gpf (4.2 Lpf to 6.0 Lpf)Meets definition of HET (High Efficiency Toilet) when used with a high efficiency flush valve (1.1 gpf -1.6 gpf or 1.28/1.1 gpf dual flush)Maximum Performance (MaP) score of 1,000 grams at 1.1 gpf - 1.6 gpfCondensation channelConcealed trapway designElongated bowlPowerful direct-fed siphon jet action1-1/2" inlet spudFully-glazed 2-1/8" trapway10" x 12" water surface areaStatic weight load of 1,000 lbs [not recommended for bariatric use]Model: 2257.101.020

Price: 117.80 USD

SKU: 5213

Weight: 55.00 lb(s)

Stock quantity: 6

3198. AH-12 Acetylene Torch Hose

Price: 40.45 USD
SKU: 4860
Weight: 1.50 lb(s)
Stock quantity: 0

3199. Air Valve Key

Price: 1.10 USD
SKU: 1703
Weight: 0.01 lb(s)
Stock quantity: 14

3200. Aquastat w/Well and Adjustable Control Temperature from 5°F to 30°F

Totally enclosed Micro Switchô snap-acting switches operate on temperature rise to set pointModel calibrated for high limit use are also suitable for low limit control if a separate high limit controller is used Visible control point scale and external adjustment screw, permit easy settingRemote bulb model may be used to sense air temperature in ducts and in outside air sensing applicationsApprovals: Underwriters Laboratories Inc: Remote bulb devices and well-mounted devices shipped without well are component recognized: File No. MP466, Guide No. MBPR2.Application: High or low limitRange: 40° F to 180° F or 100° F to 240° FMidscale Differential: 2° F or 5° F fixed or 5° F to 30° F adjustableModel L4006A2007

Price: 137.59 USD

SKU: 2884

Weight: 13.00 lb(s)

Stock quantity: 4

3201. Aquastat with Adjustable Control Temperature from 5°F to 30°F

Totally enclosed Micro Switchô snap-acting switches operate on temperature rise to set pointModel calibrated for high limit use are also suitable for low limit control if a separate high limit controller is usedVisible control point scale and external adjustment screw, permit easy settingRemote bulb model may be used to sense air temperature in ducts and in outside air sensing applicationsApprovals: Underwriters Laboratories Inc: Remote bulb devices and well-mounted devices shipped without well are component recognized: File No. MP466, Guide No. MBPR2.Application: circulator, low limit, and high limitRange: 65° F to 200° FMidscale Differential: 5° F fixed or 5° F to 30° F adjustableModel L6006C1018

Price: 126.04 USD

SKU: 3477

Weight: 10.00 lb(s)

Stock quantity: 4

3202. Automatic Sprinkler Shut Off Valve Warning Sign

Size: 12" x 6"Material: AluminumRust-Free

Price: 18.20 USD
SKU: 4029
Weight: 0.10 lb(s)
Stock quantity: 0

3203. Blue Flapper Fits TOTO

Made from UHMW PE to be the most abrasionresistant, chemically inert flapper on the market Furnished with 9" stainless steel chain

Price: 15.33 USD
SKU: 5331
Weight: 0.40 lb(s)
Stock quantity: 12

3204. Boiller Pilot Burner

Includes natural and LP gas orifices, 1/4 in. compression fitting“F,” “K,” or “L” tip styles “B” mounting bracket“A” mounting bracket adapter.Approvals, American Gas Association IAS: IAS Certified File No. L2025001

Price: 31.10 USD
SKU: 5022

3205. Bond 1-Handle Monoblock Bathroom Faucet

Ceramic disc valve cartridge ensures a lifetime of drip-free performanceQuick Spin Nuts tighten by hand with no tools needed, for easy installation ADA Compliant for handicap accessible useLead Free1.5 gallons per minute (1.5 gpm/5.7 L/min) maximum flow rate helps to save water Centerset lavatory faucet on 4" centers1/4 turn washerless ceramic disc valve cartridgesPop-up drain body with 1-1/4 inch (32mm) tail pieceCEC ListedCALGreen Compliant

Price: 88.00 USD

SKU: 8577

Weight: 5.00 lb(s)

Stock quantity: 0

3206. Chrome Plated Fit-All Tank Toilet Lever

Price: 7.22 USD
SKU: 398
Weight: 0.25 lb(s)
Stock quantity: 11

3207. Chrome Plated Push Button Tank Toilet Lever

Push button for easy activationTrims/bends to fit most front, side and angel mount tanks

Price: 14.85 USD
SKU: 6341
Weight: 0.30 lb(s)
Stock quantity: 11

3208. Chrome-Plated "Crown" Tank Toilet Lever

8 1/4" Flat brass arm with score line for easy trimming to American Standard® sizeScored at 4-1/4"

Price: 9.05 USD
SKU: 8466
Weight: 0.30 lb(s)
Stock quantity: 19

3209. Chrome-Plated Side Mount Tank Lever For Eljer Toilet

Price: 12.00 USD
SKU: 8711
Weight: 0.25 lb(s)
Stock quantity: 12

3210. Combihammer TE 50-AVR 120 V

Hammer drilling diameter range: 1/2" - 1-9/16" Optimum Hammer drilling range: 5/8" - 1-1/4"Hammer drilling RPM: 360 rpmFull hammering frequency: 3510 impacts/minuteFunctionality: Active Vibration Reduction (AVR), Chiseling, Depth gaugeTriaxial vibration value for hammer drilling into concrete (ah,HD): 9 m/s² 1Dust removal system available: TE DRS-Y, TE DRS-D, TE DRS-BKRated input power: 1100 W

Price: 838.60 USD

SKU: 8496

Weight: 13.00 lb(s)

Stock quantity: 0

3211. Combination 3/4" Male IPS x 1/2" Female IPS x Garden Hose Female Adapter

Price: 3.90 USD
SKU: 3167
Stock quantity: 9

3212. Control Valve Warning Sign

Size: 6" x 2"Material: AluminumRust-Free

Price: 2.70 USD
SKU: 3813
Weight: 0.10 lb(s)
Stock quantity: 74

3213. Copper Band Iron 10 FT

Copper Plated Steel

Price: 3.38 USD
SKU: 3108
Weight: 0.48 lb(s)
Stock quantity: 10

3214. Cover Plate For Sprinkler Series G5

Temperature rating is 165F (74C) to 212F (100C).

Price: 6.60 USD
SKU: 3199
Weight: 0.40 lb(s)
Stock quantity: 223

3215. Covina Single Handle 4" Centerset Bathroom Faucet

Fast and easy one person installation, with Quick Spin nuts that can be hand tightened without tools Ceramic disc valve cartridge assures a lifetime of drip-free performance Lead Free ADA Compliant design is easy to use1.5 gallons per minute (1.5 gpm/5.7 L/min.) maximum flow rate helps to save waterCenterset faucet on 4” centersWasherless ceramic disc valve cartridgePop-up drain body with 1-1/4” (32 mm) tail pieceStandards: ANSI A117.1 ASME A112.18.1 NSF 61/Section 9 CSA B 125

Price: 62.50 USD
SKU: 8575
Weight: 2.70 lb(s)
Stock quantity: 129

3216. Double Cup Sink Strainer

Stainless steel body 304 stainless steel basketFits sink w/3/1/2" -" opening - 4-1/2" flange1-1/2" S/J nutStandart shank - 1-1/4" - 2 x 7/8" threads

Price: 6.65 USD
SKU: 1813
Weight: 0.70 lb(s)
Stock quantity: 2

3217. Double Cup Sink Strainer (Extended)

Stainless steel body 304 stainless steel basketFits sink w/3/1/2" -" opening - 4-1/2" flange1-1/2" S/J nut Extended shank - 1-7/8" - 3-3/4" threads

Price: 6.65 USD
SKU: 8678
Weight: 0.72 lb(s)
Stock quantity: 0

3218. Drain Valve Warning Sign

Size: 6" x 2"Material: AluminumRust-Free

Price: 2.64 USD
SKU: 4037
Weight: 0.10 lb(s)
Stock quantity: 93

3219. Duplex Pump Control (AE-Series, Model AE21L=3)

Magnetic motor contactorsHOA switches (internal)Green pump run indicators (internal)Control ON/OFF switch (internal)Control/Alarm power-on indicator (internal)Circuit breakersEasy wiring terminal blocksVisual and audible alarmAuxiliary ContactsIncludes three pilot-duty floats

Price: 539.70 USD

SKU: 8715

Weight: 24.00 lb(s)

Stock quantity: 1

3220. Easy Lift and Clean Round Front Toilet Seat

Bottom mount solid plastic seat with cover and with quick connect nutSeat can be removed from bowl without tools for quick and easy cleaningFits any conventional round front toiletSeat includes mounting hardwareEverClean® silver-based surface permanently inhibits the growth of stain and odor causing bacteria, mold and mildew on the surface. EverClean® surface does not protect against disease causing bacteriaColor: WhiteModel: 5259B.65D.020

Price: 37.80 USD
SKU: 8564
Weight: 3.00 lb(s)
Stock quantity: 2

3221. Elongated Plastic Toilet Seat

Height: 1-1/2"6 (measured from the rim of toilet fixture to the highest point on the seat)Width: 13-15/16" (measured from left most point to the right most point on the seat)Length: 18-7/16" (measured from the back of the hinges to the front most part of the seat)Width (Inside): 8-1/8" (measured from the left edge to the right edge of the inner opening of the seat)Length (Inside): 12-1/8" (measured from the back to the front of the inner opening of the seat)Color: White

Price: 22.33 USD
SKU: 4846
Weight: 3.50 lb(s)
Stock quantity: 31

3222. Fire Sprinkler Valve Warning Sign

Size: 6" x 2"Material: AluminumRust-Free

Price: 5.09 USD
SKU: 4015
Weight: 0.10 lb(s)
Stock quantity: 20

3223. Fix-It DUCTape

1.88" x 55 Yd. x 7 milPoly-coated cloth tape. Features an excellent adhesive Has good tensile strength. Water and tear resistant For general, all-purpose use in packaging, wrapping, sealing, binding, bundling and general maintenance

Price: 4.32 USD
SKU: 1519
Weight: 1.00 lb(s)
Stock quantity: 110

3224. Galvanized Band Iron 10 FT

Material: Galvanized Steel

Price: 4.14 USD
SKU: 2811
Weight: 0.48 lb(s)
Stock quantity: 8

3225. Garden Hose Connector "Y" w/ Shut-off

Price: 5.10 USD
SKU: 8567
Weight: 0.35 lb(s)
Stock quantity: 3

3226. Garden Hose Coupling

Price: 3.50 USD
SKU: 3488
Weight: 0.30 lb(s)
Stock quantity: 14

3227. Garden Hose Female x Garden Hose Male Adapter

Price: 3.49 USD
SKU: 2530
Weight: 0.30 lb(s)
Stock quantity: 20

3228. Garden Hose Male x Garden Hose Male Adapter

Price: 3.00 USD
SKU: 2523
Weight: 0.30 lb(s)
Stock quantity: 10

3229. Garden Hose Spray Plastic

Price: 4.64 USD
SKU: 4378
Weight: 0.20 lb(s)
Stock quantity: 3

3230. Garden Hose Washer

Rubber Red

Price: 0.27 USD
SKU: 3429
Weight: 0.01 lb(s)
Stock quantity: 97

3231. Gas Water Heater Control (Nat Gas)

Automatic shut-off of main and pilot gas in the event of pilot failurePilot gas cock with safe lighting feature and filterTemperature adjustmentManifold pressure tap Built-In E.C.O. (Energy Cut Off) non-cycling high limitTemperature Range70 to 160°F

Price: 91.28 USD

SKU: 4983

3232. Gooseneck Lavatory Faucet Chrome Two Handle

4" CentersetADA approved wrist blade handles10-3/4" Spout HeightDrain not includedField convertible rigid/swivel gooseneck spout

Price: 42.50 USD
SKU: 4611
Weight: 2.00 lb(s)
Stock quantity: 10

3233. Green Gobbler

This powerful product is also environmentally friendly, safe to use and completely biodegradableIts unique delivery system makes it easy to figure out how much to use, simply tear open 1 Pac and pour entire contents into effected drain Tested and approved by SGS Laboratories

Price: 11.40 USD
SKU: 8481
Weight: 1.80 lb(s)
Stock quantity: 219

3234. Green Knit Latex Palm Coated Work Gloves

Price: 2.18 USD
SKU: 6550
Weight: 0.30 lb(s)
Stock quantity: 1379

3235. GrimeBuster Wipes (3-D Texture)

Price: 15.57 USD
SKU: 5273
Weight: 2.10 lb(s)
Stock quantity: 4

3236. Hand Torch STK-31

360 degree swivel tips Easy to clean orifice screws Includes one Eetreme and one regular tip, and pressure regulator connection

Price: 86.66 USD
SKU: 8457
Weight: 1.40 lb(s)
Stock quantity: 0

3237. Hand Torch Tip ST-3

Price: 91.57 USD
SKU: 3507
Weight: 0.50 lb(s)
Stock quantity: 1

3238. Heavy Duty Brass Sink Strainer

Crome plated solid brass bodyFits sink with 3-1/2" - 4" opening4-1/2" flange with brass nutsRolled enge basket with ground joint sealStainess Steel

Price: 20.56 USD
SKU: 4877
Weight: 1.18 lb(s)
Stock quantity: 23

3239. High Limit Immersion Aquastat (200°F)

High Limit Aquastat Controller has adjustable set point Models available for use with immersion wells or for direct immersion if faster response is needed A factory-set stop is available on L4080 to prevent setting the control at too high a temperature Models available with second limit switch to shut off all gas to the burner Liquid fill in sensing element expands as the boiler temperature risesAt the set point temperature, a diaphragm-actuated snap switch breaks the power supply to the burner primary controlTemperature Range: Maximum - 40°F above setpoint or 265°F, which ever is lowerOperating Temperature Range: 100°F to 200°FDifferential Temperature: 8 °FSwitching Action: Breaks contact on temperature rise to set pointModel: L4080B1352

Price: 108.97 USD

SKU: 4826

Weight: 13.00 lb(s)

Stock quantity: 0

3240. High Limit Strap-On Aquastat (240°F)

High Limit strap-on mounting on well mountSwitching Action: SPST, contacts break on temperature riseDifferential Temperature (°F): Manual ResetMaximum Ambient Temperature (°F): 150°FCase Dimensions (in.): 5 5/8 in. high x 2 in. wide x 2 1/8 in. deepMounting: Horizontal or Vertical MountingApprovals, Underwriters Laboratories Inc: UL Component RecognizedApprovals, Canadian Standards Association: Certified: File No. LR95329Model L4006H 1004

Price: 191.24 USD

SKU: 3485

Weight: 13.00 lb(s)

Stock quantity: 13

3241. Hot Water Angle Thermometer (40 to 280°F)

Connection: 1/2" IPS

Price: 18.41 USD
SKU: 1453
Weight: 0.68 lb(s)
Stock quantity: 13

3242. Hot Water Straight Thermometer (40 to 280°F)

Connection: 1/2" IPS

Price: 16.56 USD
SKU: 2580
Weight: 0.60 lb(s)
Stock quantity: 9

3243. Ice Maker Box - 1/4 Turn Ball Valve

Use with copper, CPVC and PEX linesPush-to-connect installation with no glue, soldering or crimping Box includes 1/4 turn ball valve, copper sweatLead free Meets UPC, IPC and cUPC requirements

Price: 19.57 USD
SKU: 3998
Weight: 0.80 lb(s)
Stock quantity: 3

3244. Junior Duo Strainer

Stainless steel body - stainless steel basketFits sink w/ 1-7/8" - 2-1/4" opening1-1/2" basket - 2-1/2" standart shankDie cast S/J nut

Price: 5.04 USD
SKU: 2464
Weight: 0.32 lb(s)
Stock quantity: 0

3245. Kwick Wick

Price: 1.54 USD
SKU: 3458
Weight: 0.05 lb(s)
Stock quantity: 45

3246. Lamp Wick

Price: 2.02 USD
SKU: 2111
Weight: 0.05 lb(s)
Stock quantity: 5

3247. LAVATORY SINK WALL HUNG WHITE

Price: 71.67 USD
SKU: 5192
Stock quantity: 7

3248. Madera 1.1-1.6 gpf ADA Universal Flushometer Bowl

Elongated floor mount flushometer valve toilet, top or back spud, less seatHigh Efficiency, Low Consumption operates in the range of 1.1gpf to 1.6gpf (4.2Lpf to 6.0Lpf)Conventional glazeFully glazed 2-1/8" trapway10" or 12" roughing-in16-1/2" rim height for accessible applicationsCondensation channelPowerful direct-fed siphon jet action10" x 12" water surface area1-1/2" inlet spud2 bolt capsRecommended working pressure between 25 psi at valve when flushing and 80 psi staticASME A112.19.2 / CSA B45.1 for Vitreous China FixturesModel: 3043.001.020

Price: 129.05 USD

SKU: 914

Weight: 50.30 lb(s)

Stock quantity: 5

3249. Madera 1.1-1.6 gpf Universal Flushometer Bowl

High Efficiency, Low Consumption operates in the range of 1.1gpf to 1.6gpf (4.2Lpf to 6.0Lpf)Conventional glaze10" or 12" roughing-in15" rim heightCondensation channelPowerful direct-fed siphon jet actionFully glazed 2-1/8" trapway10” x 12” water surface area1-1/2" inlet spud2 bolt capsModel: 2234.001.020

Price: 132.00 USD

SKU: 3755

Weight: 50.30 lb(s)

Stock quantity: 5

3250. Main Control Warning Sign

Size: 6" x 2"Material: AluminumRust-Free

Price: 2.50 USD
SKU: 4022
Weight: 0.10 lb(s)
Stock quantity: 98

3251. Main Drain Warning Sign

Size: 6" x 2"Material: AluminumRust-Free

Price: 2.64 USD
SKU: 3744
Weight: 0.10 lb(s)
Stock quantity: 97

3252. Maxwell 1.28 gpf 10" Rough-In Round Front Bowl

The Maxwell® toilet is designed with high-quality components such as 3" flush valve, dual siphon jet and moreThis Maxwell® toilet operates at 1.28 gpf (4.8 Lpf) and offers a round front bowl - perfect for smaller footprint bathroomsToilet seat not included

Price: 65.73 USD
SKU: 2400
Weight: 46.00 lb(s)
Stock quantity: 3

3253. Maxwell 1.28 gpf 10" Rough-In Toilet Tank

10 in. rough-inColor-matched, front mounted tank lever3 in. flush valve for strong water flow and flushing powerDouble nut, multi-point tank-to-bowl mounting system for easy tool-free installationColor: White

Price: 68.82 USD
SKU: 4577
Weight: 34.00 lb(s)
Stock quantity: 5

3254. Maxwell 1.28 gpf 12" Rough-In Toilet Tank

12" rough-inColor-matched, front mounted tank lever3" flush valve for strong water flow and flushing powerDouble nut, multi-point tank-to-bowl mounting system for easy tool-free installationColor: White

Price: 44.96 USD
SKU: 3349
Weight: 35.00 lb(s)
Stock quantity: 1

3255. Maxwell® 1.28 gpf 12" Rough-In Bowl

Price: 101.33 USD
SKU: 4643
Weight: 47.00 lb(s)
Stock quantity: 11

3256. Maxwell® 1.28 gpf 12" Rough-In Elongated ErgoHeight Bowl

12" Rough-in3" flush valve for strong water flow and flushing powerDouble nut, multi-point tank-to-bowl mounting system for easy tool-free installation

Price: 139.50 USD
SKU: 4612
Weight: 50.00 lb(s)
Stock quantity: 1

3257. Mercury Free Heat Only, Low Voltage Vertical Thermostat

Mounts directly on wall or on vertical outlet box. Integrated thermometer and setting scale.Non-ProgrammableUser Interface: Mechanical

Price: 39.95 USD
SKU: 5028

3258. Monitor® 13 Series Tub & Shower Trim

WaterSense certification promotes water conservationMonitor pressure balance valve keeps water temperature within a safe +/- 3degrees F (+/-1.6degrees C), helping to protect you from sudden changes in hot or cold water pressureSoft, rubber spray holes allow you to easily wipe away calcium and lime build-up from the spray face of your showerhead and handshower with the touch of a fingerTrim kit only, must order MultiChoice Universal rough-in separately to complete the unitSingle function operationSingle lever handle for ease of temperature controlMeets standards set by Americans with Disabilities Act (ADA)Spray settings include: Full Body

Price: 85.80 USD

SKU: 2610

Weight: 2.50 lb(s)

Stock quantity: 4

3259. MultiChoice® Universal Tub / Shower Rough - Universal Inlets / Outlets

MultiChoice® Universal valve body onlyAccepts single, dual, or dual thermostatic cartridgeTrim kit sold separately, cartridge ships with trimBack-to-back capabilityMounting bracket reduces rocking by providing a sturdy means of securing the valve to a stringerThree connection types (IPS, PEX and UNIVERSAL) provide connection options for every type of plumbingSquare plasterguard allows for simple 90° cuts and snaps into placeHeat-resistant pressure test cap allows for air or water testing before valve cartridge is installedValve body with stops Forged brass body Back-to-Back installation capabilitiesCan be tested with air (200 PSI) or water (300 PSI) without valve using supplied test cap Square plasterguard allows for right angle cutsThin wall mounting For use with MultiChoice® Universal single or dual function trim. Cartridge ships with trim 1/2" outlets and connectionsNote: No tub outlet in HF modelNote: Should use proper fitting with each type (copper tubing, iron pipe, and pex fitting) Note: Should use proper tooling with crimping pex fitting and cold expansion pex models Note: IP indicates female 1/2" threaded connections Note: UN indicates Universal type fitting and is 1/2" NPT male thread with 1/2" C.W.T. female sweat.

Price: 64.35 USD

SKU: 2471

Weight: 1.80 lb(s)

Stock quantity: 3

3260. No. 67 Auto-Vent

Price: 10.80 USD
SKU: 5482
Weight: 0.28 lb(s)
Stock quantity: 24

3261. North Point™ 1.6 gpf Round Front Top Spud Bowl

Operating at a conservative 1.6 gpf (6 Lpf), this floor mount bowl features a fully glazed trapway and 1-1/2 top spud for a flushometer valve to ensure reliability and performance. Its round front makes it perfect for smaller footprint floor plans.Round Front Bowl10" Rough-inFully glazed trapway for clog-free waste removal1 1/2" top spud for flushometer valve

Price: 95.04 USD
SKU: 4748
Weight: 44.00 lb(s)
Stock quantity: 0

3262. Open Front Elongated Plastic Commercial Toilet Seat

Fits all manufacturers' elongated bowlsComercial grade high impact plasticDesigned to withstand abuseStainless steel pins and hinge hardware to stand-up to all industrial applicationsEasy to clean and sanitizeColor: White

Price: 27.00 USD
SKU: 3372
Weight: 3.60 lb(s)
Stock quantity: 33

3263. Plastic Round Toilet Seat

Round seat with closed front and coverConstructed of injection molded solid plasticFeatures four molded-in bumpers, color-matched Top-Tite® hinges with non-corrosive, top-tightening Hex-Tite™ bolts and wing nutsColor:White

Price: 20.09 USD
SKU: 4804
Weight: 3.50 lb(s)
Stock quantity: 16

3264. Plymouth 4" Centers Wall Hung Bathroom Sink

Outer Dimensions: 19" x 17"Inner Dimensions: 15" x 10 3/4"Rectangular shaped basinExposed rear overflowRear-oriented drain hole location for ease of drain installationLedge type sink with backsplash for maximum sturdinessFast aligning 1 piece wall hanger includedTwo conveniently integrated, self draining soap dishes built into sinkFast aligning 1 piece wall hanger includedUniversally accessible; Compliant with the Americans with Disabilities Act (ADA) standards; see spec sheet for installation detailsFaucet and drain sold separately

Price: 54.80 USD
SKU: 3365
Weight: 33.00 lb(s)
Stock quantity: 5

3265. Pressure Switch 3-21"BreakOnFall M/R 1/4"NPT

Diaphragm-actuated safety-limit switch.Switch can be wired to turn on alarm.C6097A models break control circuit at setpoint on pressure fall.Lockout with manual reset and recycle options.Lockout models have external manual reset button.Removable transparent cover protects scaleplate and adjusting knob.Pipe tappings allow selection of positive pressure (air only) or venting connections (NPT mount only).1/4 in. NPT or flange mount models for direct mounting to Honeywell Integrated Valve Train.Optional switch position indicator lamp available.IP54 enclosure standard.Ranges: 0.4 to 5 in.wc, 3 to 21 in.wc, 12 to 60 in.wc or 1.5 to 7 psi.Surge orifice.Integral vent limiter on all models.

Price: 119.32 USD

SKU: 6622

3266. Pressuretrol 0.5 to 9 PSI

A screw on top of the case allows set point adjustment without removing the coverSensitive pressure-actuated diaphragm expands or contracts with pressure variations, moving a lever mechanism which operates the snap switchThe PA404A is a pressure actuated high limit, safety control for steam heating boilers. It breaks an electrical circuit to shut down the burner if steam pressure rises above a safe levelApprovals, Underwriters Laboratories Inc UL Listed: File no. MP466, Guide no. MBPR.Approvals, Canadian Standards Association CSA Listed: File no. LR1620. Maximum Operating Pressure: 20 psi Maximum Ambient Temperature: 150 F Pipe Connections: 1/4 in. female pipe threads Adjustable Scale Range (psi): 0.5 psi to 9 psi Electrical Ratings: 0.25 A @ 0.25 to 12 Vdc Electrical Ratings (120 Vac, Full Load): 8.0 A Electrical Ratings (120 Vac, Locked Rotor): 48.0 A Electrical Ratings (120 Vac, Resistive): 8.3 A Electrical Ratings (240 Vac, Full Load): 5.1 A Electrical Ratings (240 Vac, Locked Rotor): 30.6 A Electrical Ratings (240 Vac, Resistive): 8.3 A Electrical Ratings (277 Vac, Resistive): 7.2 A

Price: 131.73 USD

SKU: 5018

3267. Pressuretrol Controller, Manual Reset, 2 psi to 15 psi

Has one spst switchSnap-switch. Breaks two circuits automatically on pressure rise. Each circuit must be manually resetControl does not need levelingApprovals: Underwriters Laboratories Inc. (UL) Listed: File No. MP466, Guide No. MBPR. Approvals: Canadian Standards Association (CSA): File No. LR95329, Certificate No. 1720340 Pipe fitting—1/4-18 NPT. Connection on diaphragm assembly. Maximum Ambient Temperature: 150°F The L4079 is unaffected by moderate vibrationOperating Range: 2 psi to 15 psi

Price: 124.60 USD

SKU: 5024

3268. QuietFILL® Toilet Fill Valve

It has a universal design to fit all brands and features a wide range of adjustability to fit most 2-piece and 1-piece toiletsThe QuietFill Fill Valve is very easy to install and adjust; no tools are requiredThe innovative twist-lock adjustment makes installation easyDesigned to fit more toilets, this toilet fill valve adjusts from 8 inch to 14 inch, fitting large and small tanksModel: 528

Price: 19.56 USD

SKU: 2644

Weight: 0.55 lb(s)

Stock quantity: 4

3269. Red Latex Palm Coated Gloves

Price: 0.63 USD
SKU: 5506
Weight: 0.30 lb(s)
Stock quantity: 3759

3270. Regal® Exposed Manual Flushometer (110-XL)

PERMEX® synthetic rubber diaphragm with dual filtered fixed bypassSweat solder adapter with cover tube & cast wall flange with set screwNon-hold-open handle, fixed metering bypass and no external volume adjustment to ensure water conservationDiaphragm, handle packing and vacuum breaker to be molded from PERMEX® rubber compound for chloramine resistanceADA compliant metal oscillating non-hold-open handle1” I.P.S. screwdriver bak-chek® angle stop w/ free spinning vandal resistant stop cap

Price: 98.00 USD

SKU: 4794

Weight: 6.60 lb(s)

Stock quantity: 0

3271. Regal® Exposed Manual Flushometer (111-XL)

ADA Compliant metal oscillating non-hold-open handle 1” I.P.S. screwdriver bak-chek® angle stop Control stop plug Sweat solder adapter with cover tube Cast wall flange with set screw Vacuum breaker flush connection Non-hold-open handle and no external volume adjustment to ensure water conservation

Price: 147.15 USD
SKU: 1758
Weight: 6.60 lb(s)
Stock quantity: 7

3272. Regal® Exposed Manual Flushometer (186-1XL)

PERMEX® synthetic rubber diaphragm with dual filtered fixed bypassSweat solder adapter with cover tube & cast wall flange with set screw Non-hold-open handle, fixed metering bypass and no external volume adjustment to ensure water conservation Diaphragm, handle packing and vacuum breaker to be molded from PERMEX® rubber compound for chloramine resistance ADA compliant metal oscillating non-hold-open handle 3⁄4” I.P.S. screwdriver bak-chek® angle stop w/ free spinning vandal resistant stop cap

Price: 147.15 USD

SKU: 1820

Weight: 6.60 lb(s)

Stock quantity: 6

3273. Residential Laundry Tray Sump Pump System (SU33LT-Model)

Basin components are durable, corrosion-resistant polyethyleneBox and cover have a matching textured finish1-1/2” threaded inlet and ventGrommet cord sealAccommodates 1-1/2” discharge pipingStainless steel boltsLarge 6 gallon capacitySize: 15” x 15” x 14” Automatic, includes vertical float switch Patented, magnetic float switch is protected for maximum durability High strength, rare earth magnets provide outstanding activation capability with a totally sealed switch Cast iron motor housing provides excellent motor heat dissipation Built-in strainer prevents large solids from clogging the impeller Top-suction impeller eliminates air lock issues Thermoplatic pump body strainer and impeller

Price: 110.97 USD

SKU: 2631

Weight: 19.50 lb(s)

Stock quantity: 0

3274. Respirator Mask 8210

NIOSH approved for at least 95 percent filtration efficiency against certain non-oil based particlesTwo-strap design with welded dual point attachment helps provide a secure seal Cushioning nose foam Lightweight construction promotes greater worker acceptance and may help increase wear time

Price: 2.81 USD
SKU: 2662
Weight: 0.30 lb(s)
Stock quantity: 508

3275. Round White Bolt Caps w/ Washer (Pair)

Price: 0.95 USD
SKU: 5078
Weight: 0.01 lb(s)
Stock quantity: 5

3276. Scotch-Brite General Purpose Hand Pad

Excellent starting point to clean, finish, grain, denib and defuzzMay be used by hand, with a hand pad block, or on an in-line sander

Price: 1.54 USD
SKU: 1503
Weight: 0.05 lb(s)
Stock quantity: 624

3277. Screw Driver Bit Set 6 in 1

Price: 4.92 USD
SKU: 2630
Weight: 0.35 lb(s)
Stock quantity: 18

3278. Siamese Connection Warning Sign

Size: 12" x 10"Material: AluminumRust-Free

Price: 7.20 USD
SKU: 6494
Weight: 0.10 lb(s)
Stock quantity: 0

3279. Single Handle Centerset Bathroom Faucet

Diamond Seal Technology is less hassle to install and helps your faucet perform like new for life, reducing leak points and lasting twice as long as the industry standardEverything you need is together in one convenient box, including integrated InnoFlex PEX supply lines3-hole 4" installation50/50 pop-upADA CompliantWaterSense® labeled faucet uses at least 20% less water than the industry standard without compromising performanceRigid spoutMaximum 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa GPM indicates maximum 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa HGM indicates maximum 0.5 gpm @ 60 psi, 1.9 L/min @ 414 kPa Three hole mount Diamond coated ceramic cartridge 3/8" O.D. straight, staggered PEX supply lines •Red/blue indicator markings

Price: 116.67 USD

SKU: 7622

Weight: 3.00 lb(s)

Stock quantity: 2

3280. Single Handle Kitchen Faucet

DIAMOND Seal Technology is less hassle to install and helps your faucet perform like new for life, reducing leak points and lasting twice as long as the industry standardEverything you need is together in one convenient box, including integrated InnoFlex PEX supply lines3-hole 8" installationADA CompliantStandard spout swivels 180 degrees8 11/16" (221 mm) long spout swings 180°Lever handle shall return to neutral position when faucet is turned offControl mechanism shall be the diamond coated ceramic cartridge3/8" O.D. straight, staggered pex supply tubes- 35" (889 mm) and 36" (914 mm) longStandard 3/8" (10 mm) compression gasket fittingsMounts on standard 1 3/8" (35 mm) +/- 1/8" (3 mm) diameter holes on 8" (203 mm) centersMaximum 1.80 gpm @ 60 psi, 6.8 L/min @ 414 kPa

Price: 95.12 USD

SKU: 7621

Stock quantity: 10

3281. Single Handle Lavatory Faucet

Finish: Chrome PlatedWith one handle and ceramic disc valveUpc approved lead free product

Price: 87.01 USD
SKU: 2439
Weight: 3.00 lb(s)
Stock quantity: 4

3282. Single Handle Single Hole Kitchen Faucet

CompressionChrome plated finishSingle lever handle high-rise tubular spoutConcealed deckExtra heavy brass bodyFlex stainless steel supply tubes

Price: 100.05 USD
SKU: 2447
Weight: 4.50 lb(s)
Stock quantity: 2

3283. Solder Wire Silversol

3 mm0.125", 1 lb450°F - 464°F melting range

Price: 26.33 USD
SKU: 2390
Weight: 1.00 lb(s)
Stock quantity: 10

3284. Sprinkler Guard

Model JG

Price: 2.28 USD
SKU: 4802
Weight: 0.20 lb(s)
Stock quantity: 147

3285. SPRINKLER SHUT OFF SIGN

Price: 4.38 USD
SKU: 820
Weight: 0.10 lb(s)
Stock quantity: 15

3286. Standard Dual Standing Pilot Gas Valve - 3/4" x 3/4"

The VR8300 setup for natural gas includes a 39369 LP Conversion Kit. The kit contains a new cap screw, a pressure regulator adjustment screw, a tapered spring and a conversion label. The control must be equipped with a standard servo pressure regulator. Step-opening gas controls cannot be converted.Ambient Temperature Range 0°F to 175°FApprovals: International Approval Services Listed: L2025007

Price: 108.81 USD
SKU: 569

3287. Standard Non-Programmable Thermostat (Model T834N1002)

Integrated thermometer and temperature setting scalePrecise Snap-action switchMount directly on wall or outlet boxIncludes dealer logo pocket

Price: 41.25 USD
SKU: 3995
Weight: 1.50 lb(s)
Stock quantity: 1

3288. Standard Pilot Gas Valve - 120 Vac

Used on 120V systems Ambient Temperature Range 32°F to 175°FPressure Ratings: 1/2 psiApprovals, Underwriters Laboratories Inc: UL Component Recognized Approvals, American Gas Association IAS: AGA Design Certified; File No. L2025003, CGA Design Certified; File No. L2025003, UL Component RecognizedBody Pattern: Straight-through, multi-tapped with 1/2 in. right and left outlets plugged Type of Gas: Natural

Price: 281.11 USD

SKU: 657

3289. Standard Pilot Gas Valve - 24V - 1/2" x 3/4" Inlet/Outlet Size

Used on 24V systemsAmbient Temperature Range 32°F to 175°FPressure Ratings: 1/2 psiApprovals, American Gas Association IAS: AGA Design Certified; File No. L2025003, CGA Design Certified; File No. L2025003, UL Component RecognizedApprovals, Underwriters Laboratories Inc: UL Component Recognized Body Pattern: Straight-through, multi-tapped with 1/2 in. right and left outlets pluggedType of Gas: Natural or LPInlet/Outlet Size (in.): 1/2 in. x 3/4 in.

Price: 222.22 USD

SKU: 600

3290. Standart Duo Strainer

Wide heavy duty peg postRolled enge basket with stick postFits sink with 3-1/2" to 4" openings Stainless SteelDie cast S/J nut

Price: 10.13 USD
SKU: 6487
Weight: 0.56 lb(s)
Stock quantity: 21

3291. Standing Bath Waste & Overflow

Price: 46.66 USD
SKU: 5218
Weight: 5.00 lb(s)
Stock quantity: 4

3292. STK-9 Dual Fuel Soldering Torch

Price: 78.74 USD
SKU: 3501
Weight: 1.40 lb(s)
Stock quantity: 7

3293. STK-99 Self Lighting Soldering Torch

Price: 90.36 USD
SKU: 5030
Weight: 1.20 lb(s)
Stock quantity: 3

3294. T4 Pro Programmable Thermostat, 1H/1C Heat Pump, 1H/1C Conventional (Model TH4110U2005)

Push-button programmableFlexible scheduling7-day, 5-2, 5-1-1 or non-programmableBattery or C-wireDisplay size: 3.93 sq. in.Replaces this FocusPRO or PRO model: TH6110D1021, TH6110D1005, TH5110D1022, TH5110D1006, TH4110D1007, TH3110D1008, TH2110DV1008, TH2110DH1002Simple installation: All T Series thermostats use the same UWP mounting system, helping you standardize your training program, install process and truck stock. Install one and you can install them all.Simple upsell: The T Series features a snap-together design that enables you to easily move customers from a non-connected to a connected thermostat when they’re ready for Wi-Fi – without having to remove the connector and cover plate.

Price: 49.27 USD

SKU: 5009

Weight: 1.00 lb(s)

3295. T6 Pro Programmable Thermostat, 3H/2C Heat Pump, 2H/2C Conventional (Model TH6320U2008)

Push-button programmable, optional dual fuel, flexible schedulingApplication: 24 Vac systems; Gas, Oil, Electric Warm Air; Hot water Coil; Gas, Oil, Electric Hydronic; or Steam / Gravity SystemsElectrical Ratings: 20 to 30 VacStages: Up to 3 Heat/2 Cool Heat Pumps; Up to 2 Heat/2 Cool Conventional SystemsElectrical Connections: Honeywell UWP Mounting SystemOperating Humidity Range (% RH): 5 to 90% RH, non-condensingSupply Voltage: 20 to 30 VacSwitch Positions (System): HEAT-OFF-COOL-AUTO-EM.HEATSwitch Positions (Fan): AUTO-ON-CIRC-FOLLOW SCHEDULEOperating Temperature Range (F): 37 F to 102 FShipping and Storage Temperature Range (F): - 20 F to 120 FAccuracy (F): 3 FDifferential Temperature (F): ± 1 FInterstage Differential Temperature (F): 1 to 1.5 F Multistage models onlyAmbient Temperature Range (F): 32 F to 120 FSwitch Type: RelayLEDs: LED Back LightProgrammability: 7 day, 5-1-1 day, 5-2 day, or Non-programmablePower Method: Battery or HardwiredTerminal Designations RC, R, C, W, W2 - AUX, Y, Y2, O/B, G, K, E, L/A, S, SDisplay: Large Display, Soft Key ControlsDisplay Size 5.44 sq. in.Temperature Control Mode Selections: Ambient Air TemperatureChangeover: Auto or Manual SettingTemperature Range (F): Heat: 40 F to 90 F; Cool 50 F to 99F SettingHeat Current 0.02-1.0 A Fan Current 0.02-.05 AExternal Sensors Available Optional: Outdoor - C7089U1006, Remote Indoor - C7189U1005Model TH6320U2008

Price: 95.00 USD

SKU: 6733

Weight: 0.90 lb(s)

Stock quantity: 0

3296. Telescoping Basin Wrench

Price: 63.20 USD
SKU: 8470

3297. Test & Drain Warning Sign

Size: 6" x 2"Material: AluminumRust-Free

Price: 2.40 USD
SKU: 7392
Weight: 0.10 lb(s)
Stock quantity: 93

3298. Test Valve Warning Sign

Size: 6" x 2"Material: AluminumRust-Free

Price: 2.70 USD
SKU: 4023
Weight: 0.10 lb(s)
Stock quantity: 98

3299. Thermostatic Operator, Combined Remote Mounted Dial and Sensor

Capillary: 6'Temperature Range: 41°F to 86°F

Price: 63.52 USD
SKU: 3617
Weight: 0.66 lb(s)
Stock quantity: 0

3300. Thermostatic Operator, Valve Mounted Dial and Remote Sensor

Temperature Range: 45°F to 86°FCapillary: 6'

Price: 50.74 USD
SKU: 8720
Weight: 0.51 lb(s)
Stock quantity: 0

3301. Thermostatic Operator, Valve Mounted Dial and Sensor

Valve Mounted Dial & SensorTemperature Range: 45°F to 86°F

Price: 39.42 USD
SKU: 3603
Weight: 0.35 lb(s)
Stock quantity: 0

3302. Transitional SoftClose Round Toilet Seat

Round front toilet seat and cover with SoftClose seat hinge systemColor: White

Price: 45.54 USD
SKU: 4604
Weight: 6.20 lb(s)
Stock quantity: 2

3303. Trimbrook 1.0 gpf Siphon Jet Top Spud Urinal Bowl

Vitreous chinaLow-consumption (3.8 Lpf/1.0 gpf)Flushing rimSiphon jet flush actionExtended sides for privacy3/4" inlet spudOutlet connection threaded 2" inside (NPTF)2 wall hangersFixture onlyMeets ANSI flush requirements at 1.0 GPFModel: 6561017.020

Price: 210.25 USD

SKU: 3763

Weight: 51.00 lb(s)

Stock quantity: 3

3304. Tronic 3000 Point-of-Use Electric Tankless Water Heater

GPM Output @ Temp Rise of 75°F Rise: 0.7 GPMGPM Output @ Temp Rise of 60°F Rise: 0.8 GPMGPM Output @ Temp Rise of 45°F Rise: 1.1 GPMInput (High/Low Setting, kW): 7.2 kW 3.6 kWActivation Flow Rat: 0.75 GPMWater Pressure Range: 10 - 150 psiThermal Efficiency: 98 %Volts: 240 / 220 / 208 VModel: US7

Price: 271.25 USD

SKU: 8574

Weight: 5.00 lb(s)

Stock quantity: 2

3305. TWIN 90° Elbow

Made of durable PVCNot for use with compressed airCan be installed vertically or horizontallyMaximum Pressure: 200 psi Maximum Working Temperature 212 F

Price: 10.41 USD
SKU: 6250

3306. Two Handle Lavatory Faucet with Brass Pop/Up

Compression style valve with solid brass stems and seatsDurable solid brass body and waterwaysInterchangeable with Gerber partsCertified lead-freeADA compliantLead Free

Price: 41.80 USD
SKU: 4645
Weight: 3.40 lb(s)
Stock quantity: 4

3307. Two Handle Lavatory Faucet with Brass Pop/Up

Compression style valve with solid brass stems and seatsDurable solid brass body and waterwaysInterchangeable with Gerber partsCertified lead-freeADA compliant

Price: 50.00 USD
SKU: 8429
Weight: 3.50 lb(s)
Stock quantity: 2

3308. Ultra Flush® 1.6 gpf 12" Rough-In Two-Piece Elongated Bowl

Harness the power of the ultimate flushing machine with an Ultra Flush® 1.6 gpf (6 Lpf) Pressure Assist Toilet. Boasting top of the line professional performance, its unique rim provides complete rinsing coverage with every flush. The tank uses a Sloan FlushmateÂ® pressure vessel which releases compressed air in a downward path and forces water into the bowl, pushing waste out through our extra-large 3" trapway. An exclusive six-point tank to bowl mounting system creates precise contact for superior stability and is designed to be tightened without toolsElongated Bowl, 14 1/2"+ HeightChrome, Metal Tank LeverExtra large 3" average Trapway Size for clog-free performanceSloan Flushmate Pressure Vessel InsideDual fed siphon jets increases the speed and power of the flush, for a quick and clean bowl everytimeGenerous water surface to thoroughly rinse bowl with each flushExtra Large 12 1/2" x 10 1/2" water surface to thoroughly rinse bowl with each flush1.6 gpf (6 Lpf)Two-piece toilet12" Rough-inIndustry MaP Rating: 1250gDouble nut, multi-point tank-to-bowl mounting system for easy installation without breakageNon-Sweating Insulated TankToilet seat not included

Price: 317.25 USD

SKU: 2387

Weight: 84.00 lb(s)

Stock quantity: 2

3309. Universal Intermittent Pilot Control Module (S8610U)

Provides ignition sequence, flame monitoring and safety shutoff for intermittent pilot central furnaces and heating appliances Provides 100 percent pilot gas shutoff if pilot fails to light; after 6-minute delay, trial for ignition is repeated. Ignition trial/delay sequence is repeated until the appliance lights or call for heat is removed For use with Natural or LP gas For use in single rod or dual rod/remote sense applications. Includes relay contacts for use with any intermittent pilot gas control string with maximum 1.0A pilot or 2.0A main valve rating; Voltage: 24V, 60 Hz Current Draw: 1A pilot valve, 2A main valve Valve Contact Rating: 0.2A

Price: 127.30 USD

SKU: 5323

Weight: 1.00 lb(s)

Stock quantity: 1

3310. Universal Toilet Fill Valve (400A)

Height easily adjusts from 9" to 14" Built durable from corrosive resistant materials Replaces old ballcock and outdated valve designs

Price: 11.70 USD
SKU: 6608
Weight: 0.55 lb(s)
Stock quantity: 11

3311. VALVE SHUT OFF SIGN

Price: 3.74 USD
SKU: 4014
Weight: 0.10 lb(s)
Stock quantity: 20

3312. Virtua™ Protective Eyewear Clear Uncoated Lens

Lightweight, unisex protective eyewearHigh wraparound coverageComfortable, contoured fit

Price: 3.15 USD
SKU: 3816
Weight: 0.03 lb(s)
Stock quantity: 32

3313. Wax Toilet Bowl Gasket

A 100% pure wax gasket for setting all floor outlet toilet bowlsMakes for a more positive seal & assuresGasket forms a water tight, gas tight and odor fit sealFits 3" & 4" waste lines

Price: 1.90 USD
SKU: 1852
Weight: 0.65 lb(s)
Stock quantity: 91

3314. Wax Toilet Bowl Gasket w/ Plastic Flange

A 100% pure wax gasket for setting all floor outlet toilet bowlsRing has a plastic flange which extends the discharge openingMakes for a more positive seal & assures proper bowl alignmentGasket forms a water tight, gas tight and odor fit seal Fits 3" & 4" waste lines

Price: 1.58 USD
SKU: 2637
Weight: 0.50 lb(s)
Stock quantity: 72

3315. Wet Rotor Electronic Circulators (Model EVOSTA 110-127V)

Temperature range: from 36 °F to 215 °FWorking pressure: 145 psiOperating range: 0.8 - 13.2 gpm with head up to 18 ftStandard power input: single-phase 1 x 110-127 V~ 60 Hz Protection class: IP 44Insulation class: FInstallation: with horizontal motor axisPumped liquid: Clean, free of solids and mineral oils, non - viscous, chemically neutral, with properties similar to water (glycol max 30%).Cast iron pump body and wet rotor motorDie-cast aluminium motor casingTechnopolymer impellerCeramic motor shaft on graphite bushings lubricated by the pumped liquid Stainless steel rotor liner, stator liner and closing flange Ceramic thrust ring. EPDM seal ring and brass air breather plug Thanks to the internal protection of the motor, the pump does not require overload protection

Price: 118.25 USD

SKU: 8291

Weight: 5.29 lb(s)

Stock quantity: 76

3316. Wicker Park™ Rectangular Undercounter Bathroom Sink

Outer Dimensions: 19 5/8" x 15 1/2"Inner Dimensions: 17 1/8" x 13"Rectangular shaped basinCenter Drain hole location for a uniform, upscale designNo faucet holes in sink; for use with wall-mounted or deck-mounted faucetFront overflow for seamless visual appearance in any bathroom or powder room settingUniversally accessible; Compliant with the Americans with Disabilities Act (ADA) standards; see spec sheet for installation detailsFaucet and drain sold separately

Price: 98.33 USD
SKU: 8535
Weight: 22.00 lb(s)
Stock quantity: 0

3317. X-3B Air Acetylene Torch Kit

Components:AR-B (CGA 520)RegulatorG-4 HandleAH-12 HoseA-3 Tip and A-11 TipSoft solders to 3" (75mm)Silver brazes to 1-5/8" (40mm)"B" Tank ConnectionInstruction Manual

Price: 311.79 USD
SKU: 3514
Weight: 2.00 lb(s)
Stock quantity: 1