

# **XD SERIES** 5000 WATTS Diesel Portable Generator



Ideal for Job Sites and Agricultural Applications

### **XD SERIES** 5000E **DIESEL** PORTABLE GENERATOR

#### If you've got a tough job to do, look no further than the XD5000E generator.

The sturdy steel frame features an integrated lifting eye for easy transport and on-site security. Less than 6% total harmonic distortion - for smooth operation of tools, appliances, even sensitive electronics. And it's engineered to keep running, thanks to a large fuel tank.

### **FEATURES AND BENEFITS**



**INTEGRATED LIFTING EYE** allows for easy transport and security on the job site

LARGE-CAPACITY 12 gallon fuel tank with fuel gauge provides a long run-time of 32.4 hours @ 50% load

**YANMAR LW SERIES 435CC** air-cooled direct injection, industrial-grade diesel engine

**1-¼" STEEL CRADLE** for added durability and strength

Portability Kit Sold Separately (Handle, wheels and front foot)

### **YANMAR LW SERIES 435CC ENGINE**


FEATURES AND BENEFITS



- Meets EPA's Tier 4 Final certification standards
- The L100W engine offers a compact design without sacrificing on power and performance
- YANMAR's proprietary direct injection technology allows for low fuel consumption
- Low oil shutdown safeguards engine from damage



## **CONTROL PANEL** FEATURES

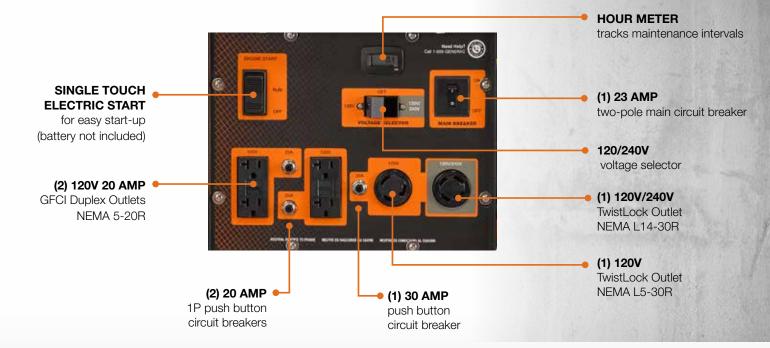

### HOW MUCH POWER DO YOU NEED?

Sizing a portable generator is easy. Check out this sample:

```
CHOOSE WHICH DEVICES YOU WANT TO POWER
AT THE SAME TIME.
```

RECORD AND ADD THE RUNNING WATTS LISTED FOR EACH DEVICE THAT YOU NEED TO POWER.

RECORD THE STARTING WATTS LISTED FOR EACH DEVICE.

SELECT THE ONE DEVICE WITH THE HIGHEST STARTING WATTS. ADD THAT NUMBER TO THE TOTAL RUNNING WATTS TO DETERMINE THE TOTAL WATTAGE REQUIREMENT.

DEVICE	RUNNING WATTS	ADDITIONAL STARTING WATTS	GENERATOR SIZE	
Paint Sprayer	600	1200	Minimum starting watts for your needs	
Halogen Light	1000	0		
Hand Drill - 1/2"	600	900		
Air Compressor ½HP	1000	2000	5200 starting watts	
Total	3200	+ 2000 =		

	DEVICE	RUNNING WATTS	ADDITIONAL STARTING WATTS
	Air Compressor - 1 HP	1600	4500
	Air Compressor - 1/2 HP	1000	2000
	Airless Paint Sprayer- 1/3 HP	600	1200
	Belt Sander - 3"	1200	2400
	Bench Grinder - 8"	1400	1100
	Circular Saw - 7-1/4"	1400	2300
JOBSITE	Hand Drill - 1/2"	600	900
BS	Hand Drill - 3/8"	400	600
οŗ	Miter Saw - 10"	1800	1800
	Quartz Halogen Work Light	1000	-
	Reciprocating Saw	960	-
	Table Saw, 10"	2000	2000
	Electric Hedge Trimmer	400	-
	Electric Line Trimmer - 9"	350	-
	Electric Chain Saw - 12" (1/2HP)	900	-
	Computer with a 17" Monitor	800	-
	Microwave - 1000 Watts	1000	-
	Refrigerator/Freezer	700	2200
	Sump Pump 1/2 HP	1050	2150
₫	Television - 27"	500	-
返	Well Pump - 1/2 HP	1000	2100
HOUSEHOLD	Central AC - 24,000 BTU	3800	4950
Ĭ	Furnace Fan Blower - 1/2 HP	875	2300
	Heat Pump	4700	4500
	Space Heater	1800	-
	Window AC - 12,000 BTU	3250	3950


\*Watts listed are approximate. Check your appliance for actual requirements. Total wattage requirements assumes intermittent starting of devices.

## **XD5000E DIESEL**

PORTABLE GENERATOR

#### SPECIFICATIONS

SERIES	XD5000E		
Model	6864		
Running Watts	5000		
Starting Watts	5500		
Engine Size	435cc		
Engine Type	Yanmar		
Low-oil Shutdown	Yes		
Starting Method	Electric		
Outlets	(4) 120V 20A GFCI (1) 120V 30A L5-30 Twist Lock (1) 120/240V L14-30R Twist Lock		
Fuel Tank Size	12 Gal.		
Run Time at 50%	32.4 Hours		
Hour Meter	Yes		
Handle	Sold separately		
Wheels	Sold separately		
Battery	Sold separately		
Emissions Certification	EPA Tier IV Diesel		
Warranty	2-Year Limited Warranty		
Dimensions (L" x W" x H")	33.1" x 22.6" x 26.1"		
Product Weight (lbs)	252		







Model 6910 - Portability Kit Sold Separately

(2) Never-flat Wheels
(1) Axle
(1) Double-grip Handle
(1) Frame Foot
Assembly Hardware

Dimensions: 26.5" x 21.5" x 5.5" Weight: 24.5 lbs

### **HOME STANDBY GENERATORS**

The Safe, Automatic Solution for Home Backup.

The power goes out and the generator goes on – whether you are home or away. It's that's simple. Install the #1 selling home standby generator from Generac and never again deal with extension cords or refueling in a storm. Instead, enjoy safe,



automatic home protection from the inconveniences and potentially dangerous effects of power outages. There's nothing like the peace of mind a Generac automatic home standby generator can give to you and your family.

## AUTOMATIC 24/7 POWER PROTECTION

#### Portable power since 1959

Since the original portable that started it all in 1959, Generac has continued to engineer advances in standby power for more than fifty years. Generac's product range includes power solutions from portable and automatic home standby generators to backup systems for commercial and industrial applications, all backed by an extensive nationwide service network of certified dealers. Because of our ongoing commitment to quality and innovation, Generac is the name home and business owners have come to trust.

#### Portable Parts and Service

Generac portable generators are supported through an extensive nationwide service network that provides parts and technical support to homeowners and contractors. For a portable generator dealer near you, visit generac.com.



0L3654 11/2016 ©2016 Generac Power Systems, Inc. All Rights Reserved. Specifications are subject to change without notice. Generac Power Systems, Inc. S45 W29290 Hwy. 59, Waukesha, WI 53189 1-888-GENERAC (1-888-436-3722)